



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[NEXT FOUNDATIONS]
 Machine Id
JLG 6042 C337099 (S/N 0160013562)
 Component
Transmission
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0221788	---	---
Sample Date		Client Info		01 Jul 2024	---	---
Machine Age	hrs	Client Info		1213	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		38	---	---
Iron	ppm	ASTM D5185m	>200	101	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		2	---	---
Aluminum	ppm	ASTM D5185m	>50	7	---	---
Lead	ppm	ASTM D5185m	>50	8	---	---
Copper	ppm	ASTM D5185m	>200	89	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	12	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		15	---	---
Boron	ppm	ASTM D5185m		75	---	---
Barium	ppm	ASTM D5185m		1	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		10	---	---
Calcium	ppm	ASTM D5185m		2671	---	---
Phosphorus	ppm	ASTM D5185m		869	---	---
Zinc	ppm	ASTM D5185m		1047	---	---
Sulfur	ppm	ASTM D5185m		5541	---	---
Visc @ 40°C	cSt	ASTM D445		35.3	---	---

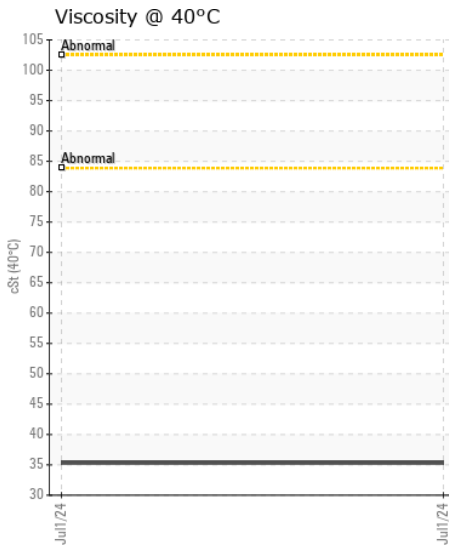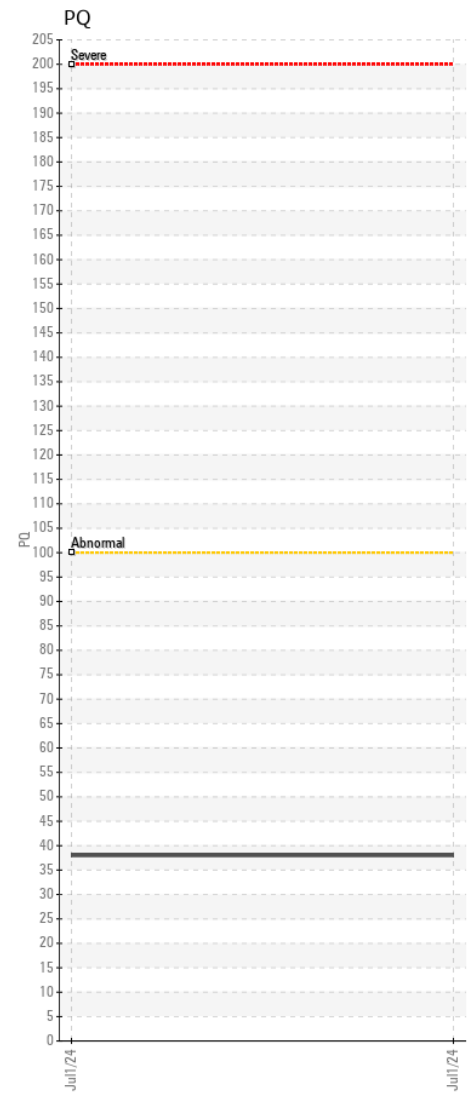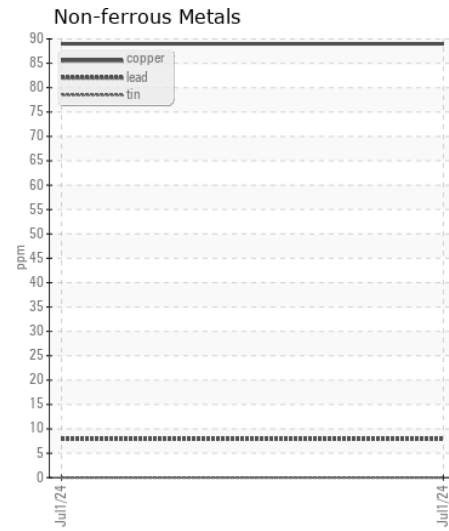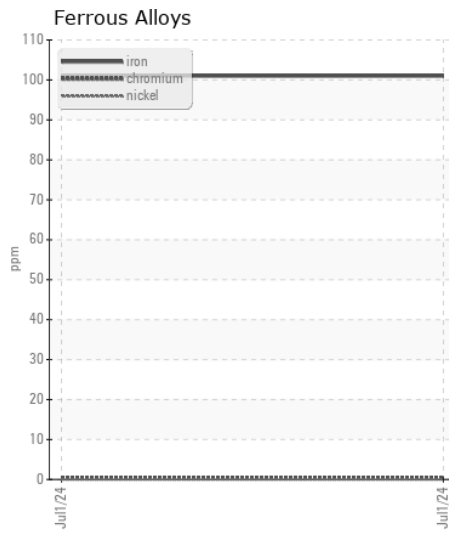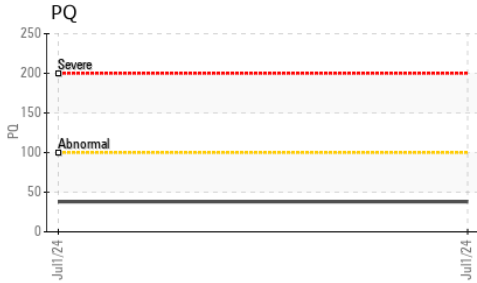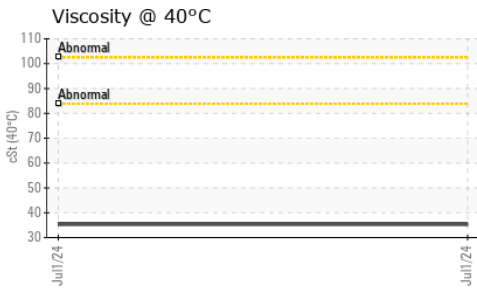

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0221788

Lab Number : 06228864

Unique Number : 11112357

Test Package : CONST (Additional Tests: PQ)

Received : 05 Jul 2024

Tested : 08 Jul 2024

Diagnosed : 08 Jul 2024 - Don Baldrige

JRE - STEPHENSON

245 YARDMASTER COURT

STEPHENSON, VA

US 22656-1761

Contact: PHIL DAUGHERTY

pdaugherty@jamesriverequipment.com

T: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (540)693-2588