



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**GALE C**  
Machine Id  
[GALE C] 002 550006-2  
Component  
Center Main Engine  
Fluid  
CHEVRON DELO 710 LE (225 GAL)

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0058667</b>	MW06221854	MW0068890
Sample Date		Client Info		<b>30 Jun 2024</b>	01 Jun 2024	01 May 2024
Machine Age	hrs	Client Info		<b>15443</b>	14766	14050
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>11</b>	16	11
Chromium	ppm	ASTM D5185m	>8	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>15	<b>3</b>	2	1
Lead	ppm	ASTM D5185m	>18	<b>6</b>	7	7
Copper	ppm	ASTM D5185m	>80	<b>13</b>	12	10
Tin	ppm	ASTM D5185m	>14	<b>4</b>	4	3
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>4</b>	6	5
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	1
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.0</b>	8.2	7.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>15.8</b>	16.2	15.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>10</b>	13	22
Boron	ppm	ASTM D5185m		<b>47</b>	40	48
Barium	ppm	ASTM D5185m		<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m		<b>52</b>	48	46
Manganese	ppm	ASTM D5185m		<b>1</b>	2	<1
Magnesium	ppm	ASTM D5185m		<b>11</b>	11	13
Calcium	ppm	ASTM D5185m		<b>3795</b>	3481	3557
Phosphorus	ppm	ASTM D5185m		<b>10</b>	19	2
Zinc	ppm	ASTM D5185m	10	<b>5</b>	9	16
Sulfur	ppm	ASTM D5185m		<b>2249</b>	2162	2613
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>8.3</b>	8.8	8.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.2	<b>9.25</b>	9.14	9.33
Visc @ 100°C	cSt	ASTM D445	15.5	<b>15.0</b>	13.7	14.9


**FT-IR (Direct Trend)**

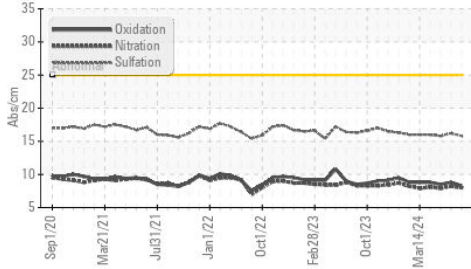


**Base Number**

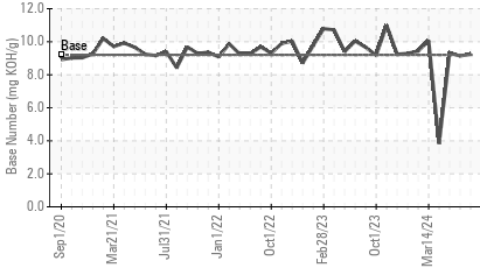


**Viscosity @ 100°C**

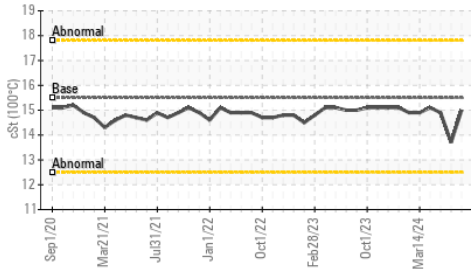


**Ferrous Alloys**

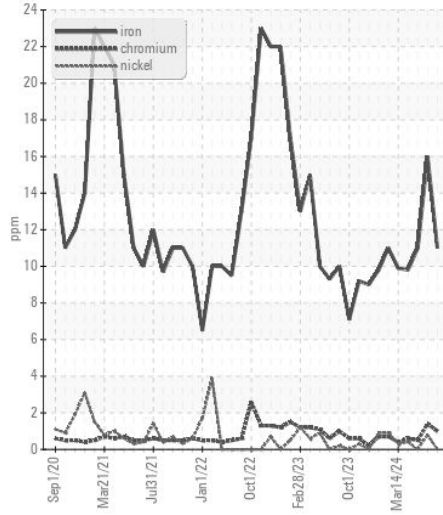


**Non-ferrous Metals**

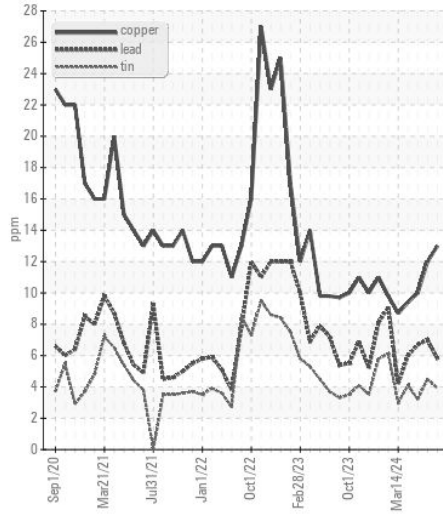

**Viscosity @ 100°C**

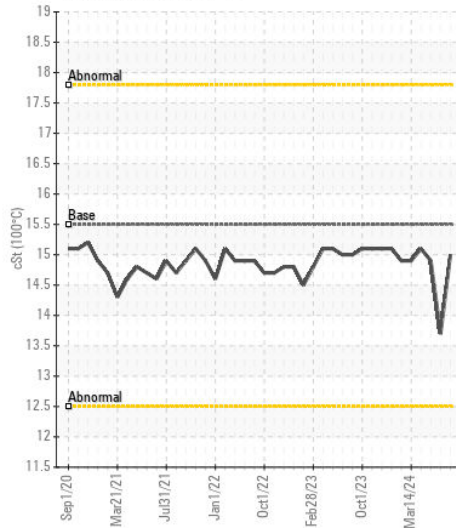

**Base Number**

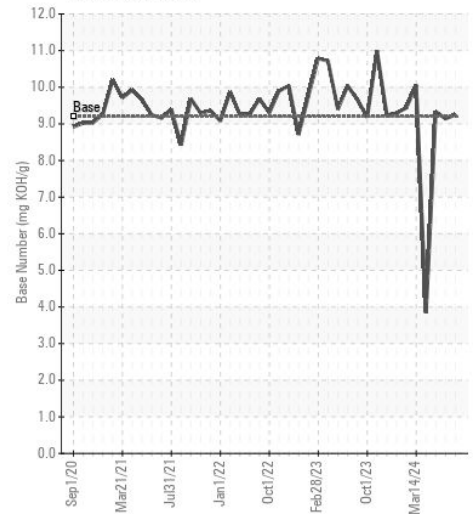

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0058667

**Lab Number** : 06229295

**Unique Number** : 11112788

**Test Package** : MAR 2

**Received** : 05 Jul 2024

**Tested** : 08 Jul 2024

**Diagnosed** : 08 Jul 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ALLEN WILLHELM

allen.willhelm@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)