



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L350H 1133 - RESERVOIR
Component
Transmission (Auto)
Fluid
VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP447726	---	---
Sample Date		Client Info		26 Jun 2024	---	---
Machine Age	hrs	Client Info		14441	---	---
Oil Age	hrs	Client Info		4000	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	51	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>5	<1	---	---
Aluminum	ppm	ASTM D5185m	>50	2	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>225	4	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	6	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	187	97	---	---
Barium	ppm	ASTM D5185m	0.0	0	---	---
Molybdenum	ppm	ASTM D5185m	0.0	<1	---	---
Manganese	ppm	ASTM D5185m	0.0	1	---	---
Magnesium	ppm	ASTM D5185m	6.8	<1	---	---
Calcium	ppm	ASTM D5185m	215	59	---	---
Phosphorus	ppm	ASTM D5185m	445	159	---	---
Zinc	ppm	ASTM D5185m	56	<1	---	---
Sulfur	ppm	ASTM D5185m	1336	1779	---	---
Visc @ 40°C	cSt	ASTM D445	35.3	28.1	---	---

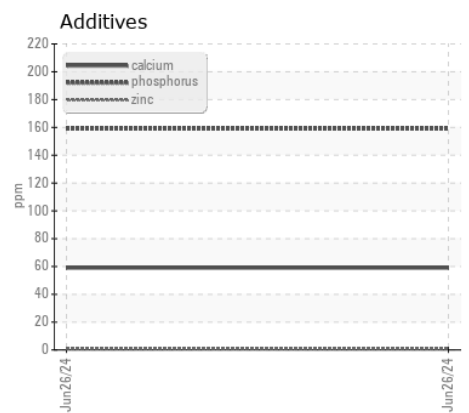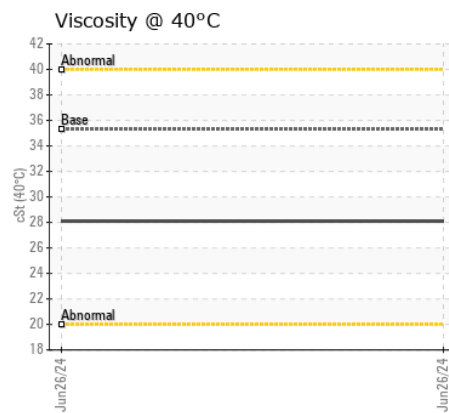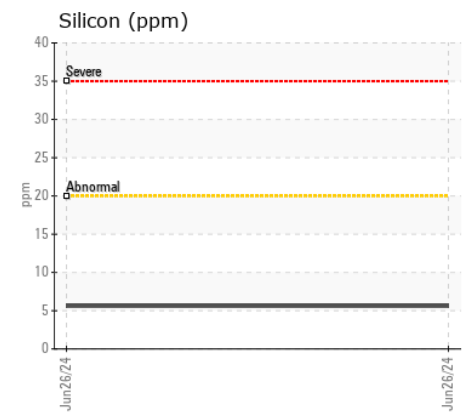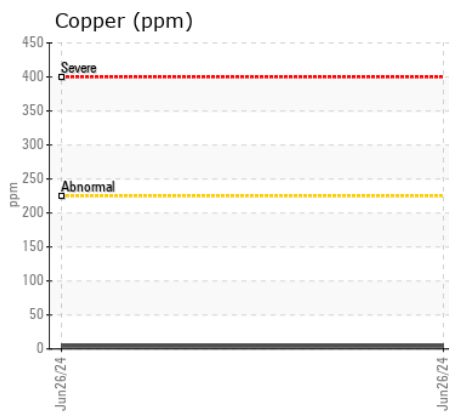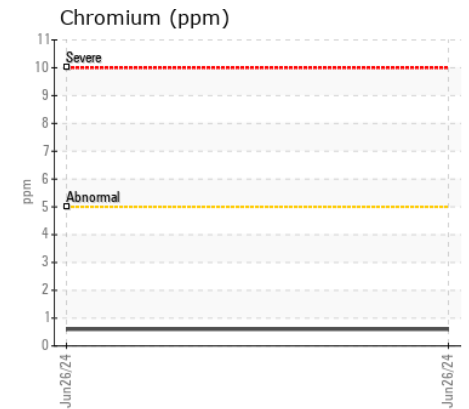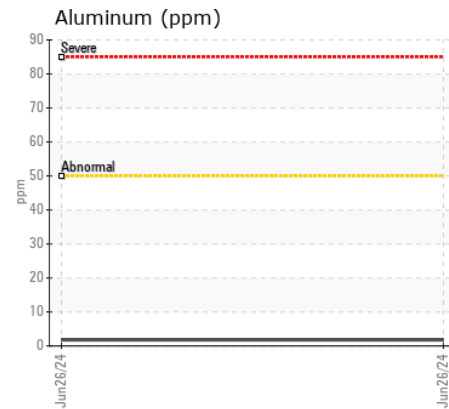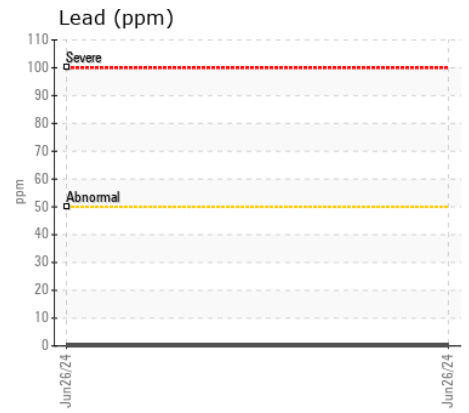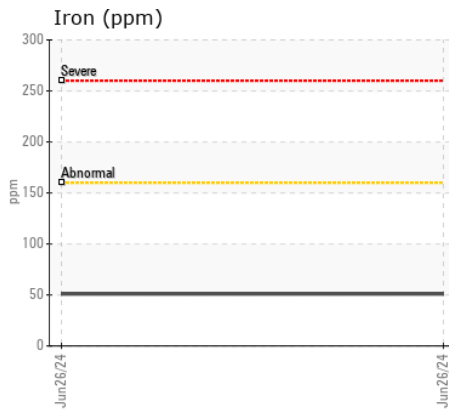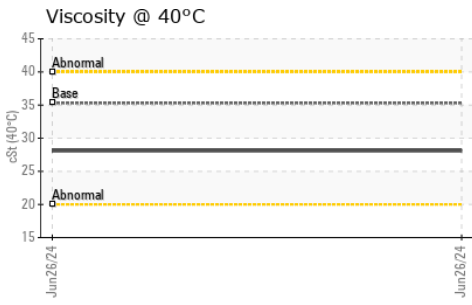

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : VCP447726
 Lab Number : 06230657
 Unique Number : 11114150
 Test Package : MOB 1

Received : 08 Jul 2024
 Tested : 09 Jul 2024
 Diagnosed : 10 Jul 2024 - Jonathan Hester

ALTA EQUIPMENT COMPANY - METRO WEST
 56195 PONTIAC TRAIL
 NEW HUDSON, MI
 US 48165
 Contact: PAUL ELZERMAN
 paul.elzerman@altaequipment.com
 T: (248)356-5200
 F: (248)356-2029

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)