



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
JOHN DEERE 210G 1FF210GXENF530151
Component
Left Final Drive
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|----------|
| Sample Number | | Client Info | | JR0200703 | JR0193988 | --- |
| Sample Date | | Client Info | | 08 Jul 2024 | 05 Dec 2023 | --- |
| Machine Age | hrs | Client Info | | 1456 | 1026 | --- |
| Oil Age | hrs | Client Info | | 1026 | 1026 | --- |
| Filter Age | hrs | Client Info | | 0 | 0 | --- |
| Oil Changed | | Client Info | | Not Changd | Not Changd | --- |
| Filter Changed | | Client Info | | N/A | N/A | --- |
| Sample Status | | | | NORMAL | NORMAL | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|-------|--------------|-------|-----|
| PQ | | ASTM D8184 | >1250 | 153 | 190 | --- |
| Iron | ppm | ASTM D5185m | >750 | 373 | 374 | --- |
| Chromium | ppm | ASTM D5185m | >9 | 6 | 6 | --- |
| Nickel | ppm | ASTM D5185m | >10 | 0 | 0 | --- |
| Titanium | ppm | ASTM D5185m | | <1 | <1 | --- |
| Silver | ppm | ASTM D5185m | | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >40 | 2 | 2 | --- |
| Lead | ppm | ASTM D5185m | >15 | 0 | 0 | --- |
| Copper | ppm | ASTM D5185m | >40 | 1 | 1 | --- |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | --- |
| White Metal | scalar | *Visual | NONE | MODER | MODER | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | --- |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|--------|--------------|-------|-----|
| Silicon | ppm | ASTM D5185m | >75 | 32 | 29 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 3 | 5 | --- |
| Water | | WC Method | >0.075 | NEG | NEG | --- |
| Silt | scalar | *Visual | NONE | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.075 | NEG | NEG | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|-------|--------------|-------|-----|
| Sodium | ppm | ASTM D5185m | >170 | 2 | 2 | --- |
| Boron | ppm | ASTM D5185m | 400 | 48 | 54 | --- |
| Barium | ppm | ASTM D5185m | 200 | 6 | 6 | --- |
| Molybdenum | ppm | ASTM D5185m | 12 | 0 | 0 | --- |
| Manganese | ppm | ASTM D5185m | | 7 | 7 | --- |
| Magnesium | ppm | ASTM D5185m | 12 | 2 | 0 | --- |
| Calcium | ppm | ASTM D5185m | 150 | 10 | 10 | --- |
| Phosphorus | ppm | ASTM D5185m | 1650 | 514 | 519 | --- |
| Zinc | ppm | ASTM D5185m | 125 | 35 | 37 | --- |
| Sulfur | ppm | ASTM D5185m | 22500 | 16932 | 15127 | --- |
| Visc @ 40°C | cSt | ASTM D445 | 143 | 184 | 187 | --- |

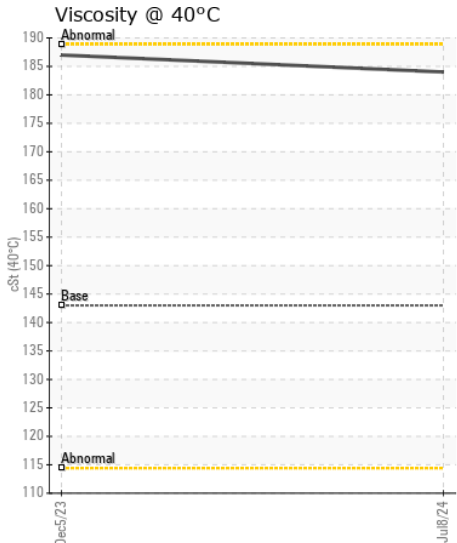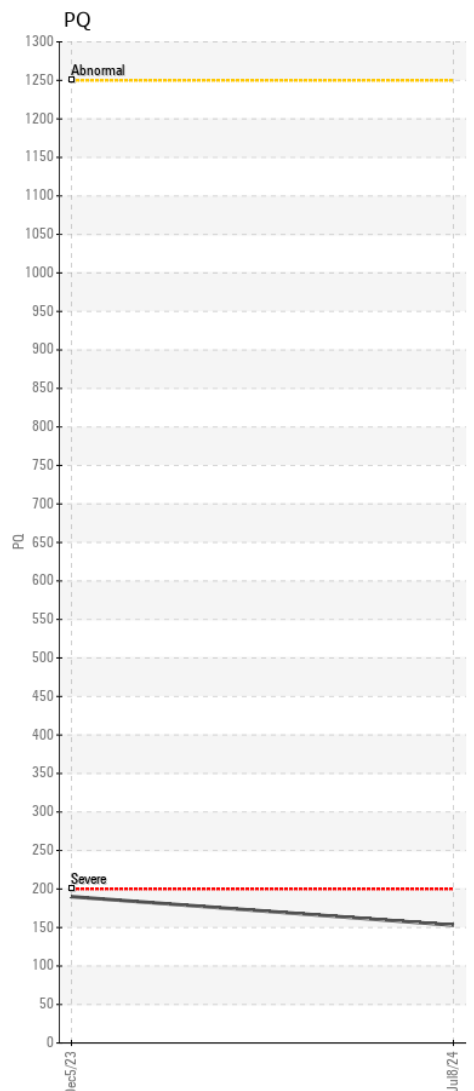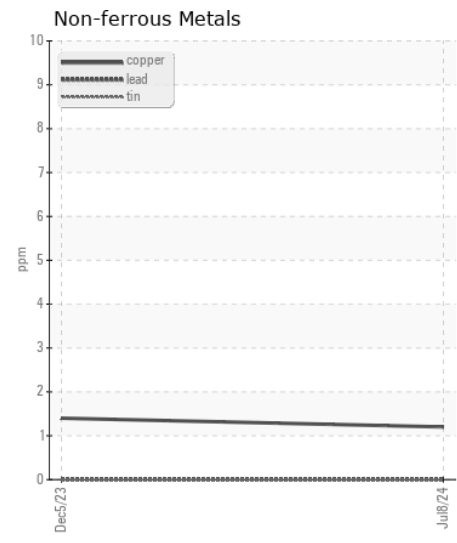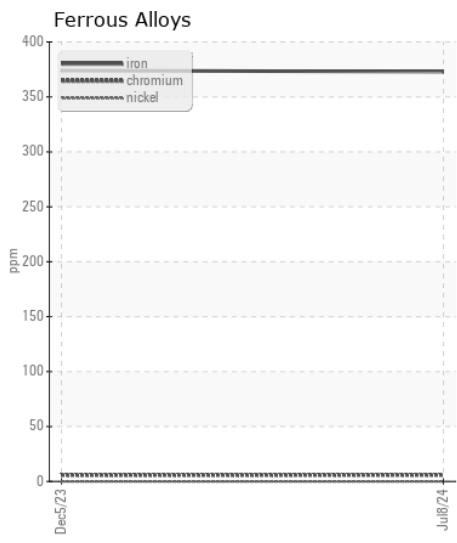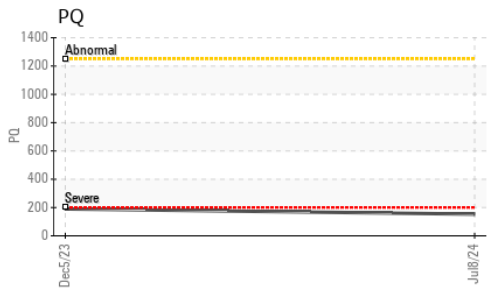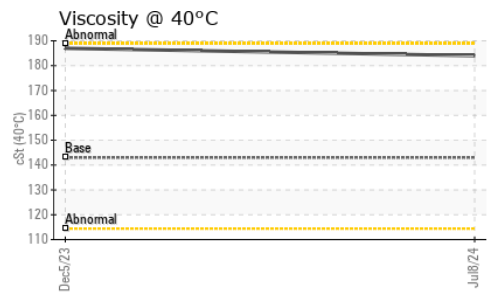

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0200703 **Received** : 09 Jul 2024
Lab Number : 06231718 **Tested** : 10 Jul 2024
Unique Number : 11115211 **Diagnosed** : 11 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529
 Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com
 T: (919)614-2260
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)