



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 26G 1FF026GXHMK267148

Component
Left Final Drive
Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0222495	JR0167989	---
Sample Date		Client Info		07 Jul 2024	06 May 2023	---
Machine Age	hrs	Client Info		965	540	---
Oil Age	hrs	Client Info		425	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Changed	---
Filter Changed		Client Info		Not Changd	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	107	63	---
Iron	ppm	ASTM D5185m	>750	151	130	---
Chromium	ppm	ASTM D5185m	>9	2	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	3	5	---
Lead	ppm	ASTM D5185m	>15	0	0	---
Copper	ppm	ASTM D5185m	>40	1	3	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	13	14	---
Potassium	ppm	ASTM D5185m	>20	1	2	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	3	3	---
Boron	ppm	ASTM D5185m		2	16	---
Barium	ppm	ASTM D5185m		3	10	---
Molybdenum	ppm	ASTM D5185m		2	17	---
Manganese	ppm	ASTM D5185m		2	2	---
Magnesium	ppm	ASTM D5185m		5	14	---
Calcium	ppm	ASTM D5185m		486	4046	---
Phosphorus	ppm	ASTM D5185m		483	605	---
Zinc	ppm	ASTM D5185m		144	765	---
Sulfur	ppm	ASTM D5185m		16257	2651	---
Visc @ 40°C	cSt	ASTM D445		118	93.3	---

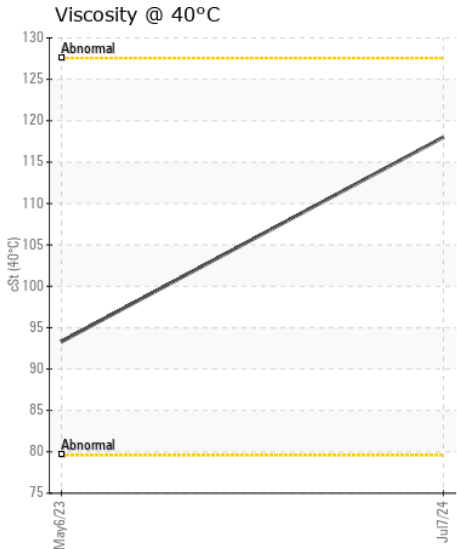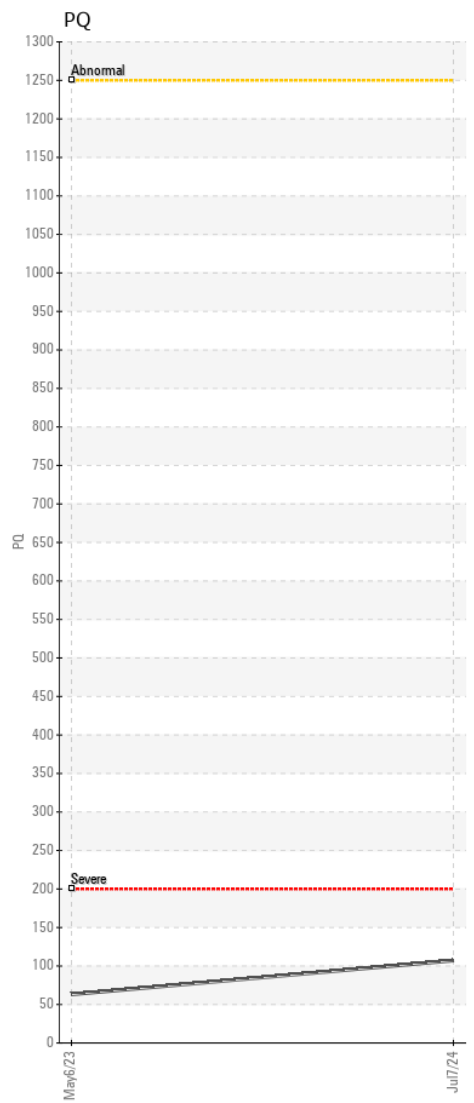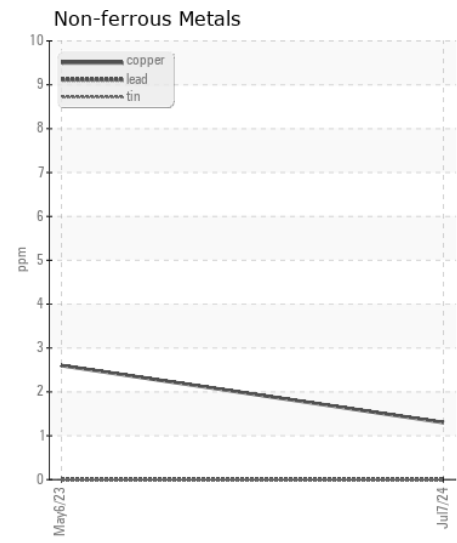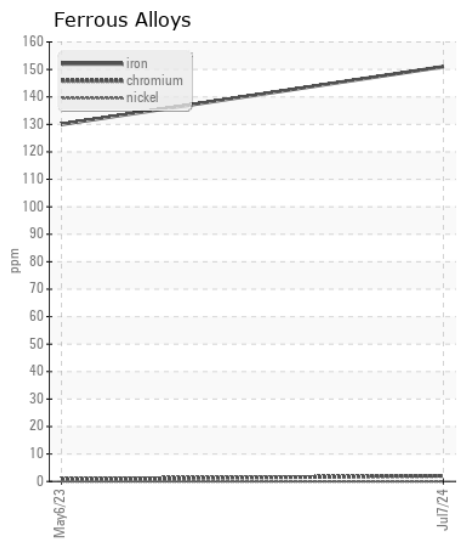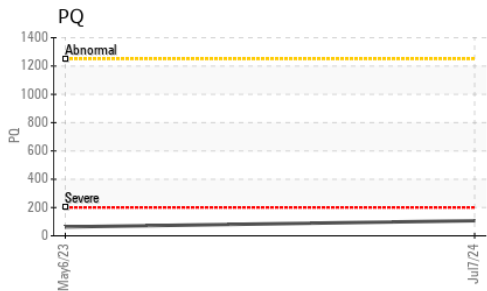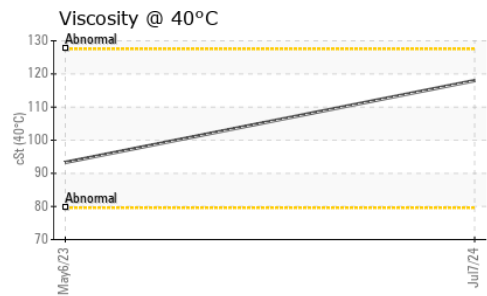

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0222495 **Received** : 10 Jul 2024
Lab Number : 06232497 **Tested** : 11 Jul 2024
Unique Number : 11115990 **Diagnosed** : 12 Jul 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529
 Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com
 T: (919)614-2260
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)