



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[16W16589]**

Machine Id

**JOHN DEERE 544 P 1DW544PAPPLX19912**

Component

**Front Axle**

Fluid

**JOHN DEERE HY-GARD HYD/TRANS (18 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample Comment: 16W16589 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0217396</b>	---	---
Sample Date		Client Info		<b>05 Jul 2024</b>	---	---
Machine Age	hrs	Client Info		<b>529</b>	---	---
Oil Age	hrs	Client Info		<b>529</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Test	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>42</b>	---	---
Iron	ppm	ASTM D5185m	>750	<b>115</b>	---	---
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>21	<b>1</b>	---	---
Lead	ppm	ASTM D5185m	>49	<b>5</b>	---	---
Copper	ppm	ASTM D5185m	>101	<b>18</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION







There is no indication of any contamination in the component.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	<b>11</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	<b>7</b>	---	---
Boron	ppm	ASTM D5185m	6	<b>4</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>4</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>8</b>	---	---
Magnesium	ppm	ASTM D5185m	145	<b>90</b>	---	---
Calcium	ppm	ASTM D5185m	3570	<b>3343</b>	---	---
Phosphorus	ppm	ASTM D5185m	1290	<b>1014</b>	---	---
Zinc	ppm	ASTM D5185m	1640	<b>1111</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>4082</b>	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>54.3</b>	---	---

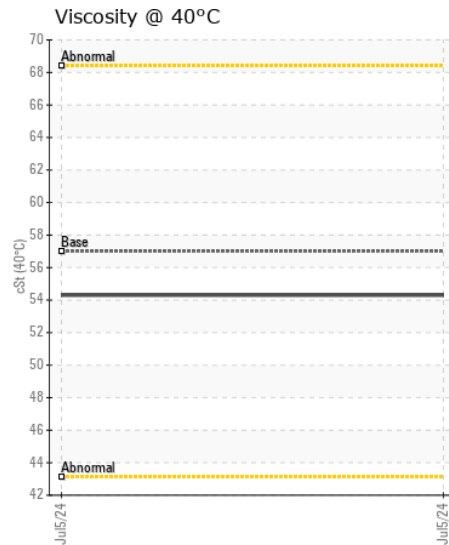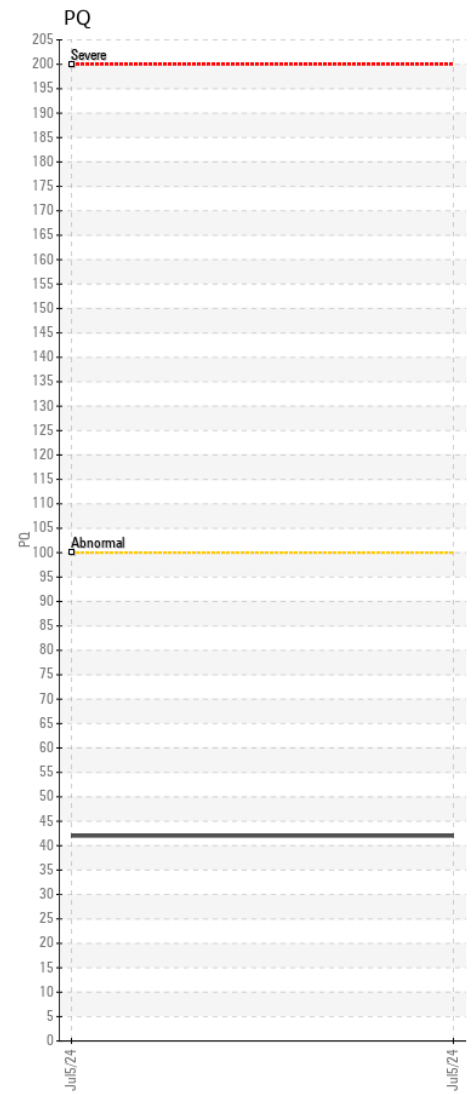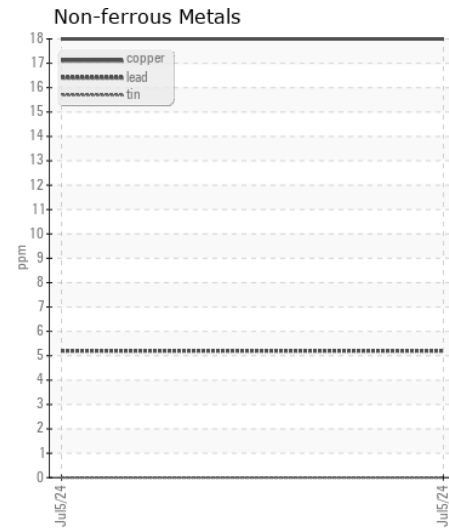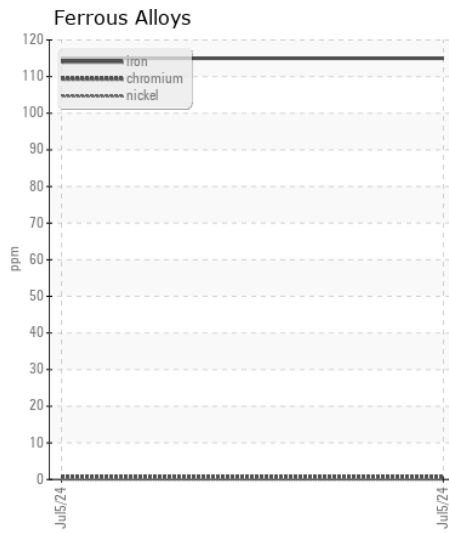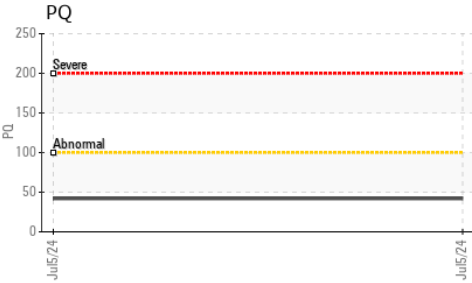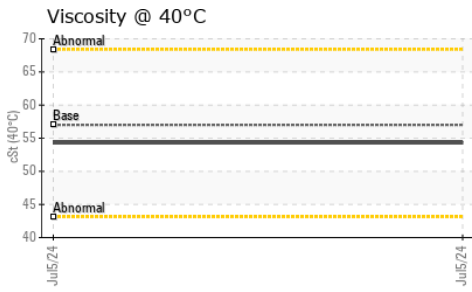

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0217396 **Received** : 10 Jul 2024  
**Lab Number** : 06232500 **Tested** : 11 Jul 2024  
**Unique Number** : 11115993 **Diagnosed** : 12 Jul 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - GARNER**  
 4161 AUBURN CHURCH RD  
 GARNER, NC  
 US 27529

Contact: RALEIGH SHOP  
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260  
 F: (919)779-5432