



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**26141**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0950528</b>	WC0882639	WC0882592
Sample Date		Client Info		<b>05 Jul 2024</b>	25 Apr 2024	02 Feb 2024
Machine Age	hrs	Client Info		<b>3828</b>	3408	3182
Oil Age	hrs	Client Info		<b>500</b>	250	250
Filter Age	hrs	Client Info		<b>500</b>	250	250
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>20</b>	14	21
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	4	2
Lead	ppm	ASTM D5185m	>40	<b>0</b>	2	0
Copper	ppm	ASTM D5185m	>330	<b>9</b>	1	2
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>12</b>	11	11
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	6	<1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.9</b>	7.9	7.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.2</b>	19.4	20.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>0</b>	2	2
Boron	ppm	ASTM D5185m	250	<b>308</b>	282	403
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>68</b>	37	72
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>500</b>	673	489
Calcium	ppm	ASTM D5185m	3000	<b>1422</b>	1415	1513
Phosphorus	ppm	ASTM D5185m	1150	<b>1013</b>	1013	1023
Zinc	ppm	ASTM D5185m	1350	<b>1170</b>	1091	1305
Sulfur	ppm	ASTM D5185m	4250	<b>3224</b>	3917	3427
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.6</b>	17.1	16.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.3</b>	8.2	7.4
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.4</b>	13.4	13.3


FT-IR (Direct Trend)

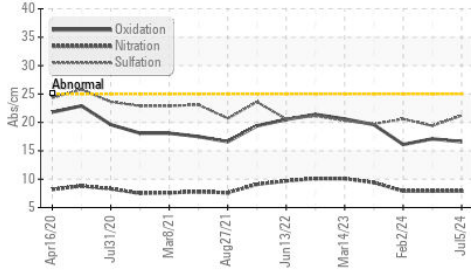


Ferrous Alloys

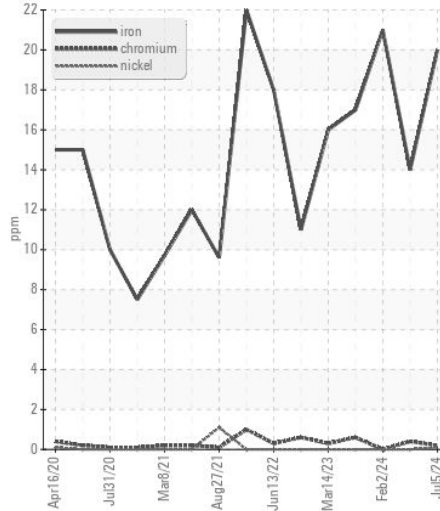


Base Number

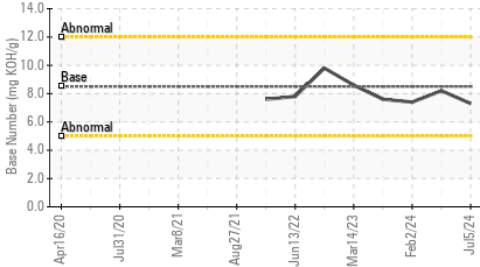


Non-ferrous Metals

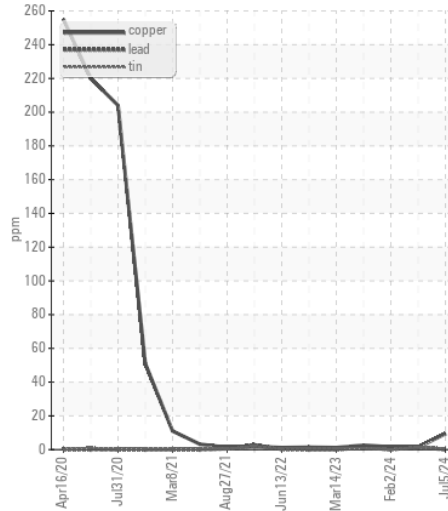


Viscosity @ 100°C

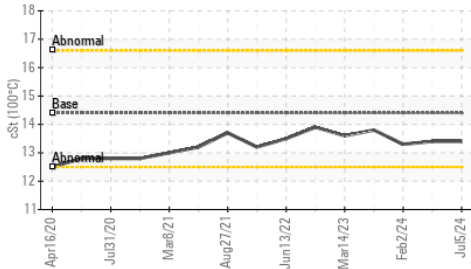

Viscosity @ 100°C

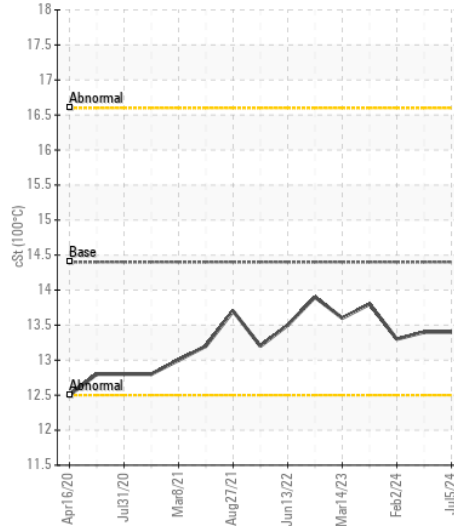

Base Number

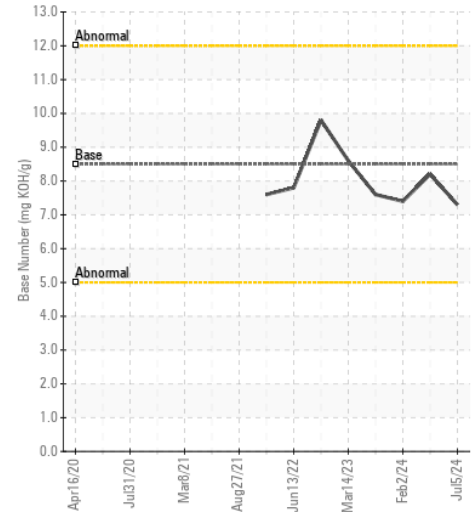

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0950528 Received : 11 Jul 2024  
 Lab Number : 06233051 Tested : 11 Jul 2024  
 Unique Number : 11116544 Diagnosed : 11 Jul 2024 - Wes Davis  
 Test Package : CONST ( Additional Tests: TBN )

**SULLIVAN EASTERN INC**  
 2860 C SLATER RD  
 MORRISVILLE, NC  
 US 27560

Contact: SCOTT SULLIVAN  
 ssullivan@sullivaneastern.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)484-8993  
 F: (919)484-2136