



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Area
[X39607]

Machine Id
3148

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP433097	---	---
Sample Date		Client Info		03 Jul 2024	---	---
Machine Age	hrs	Client Info		7028	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	6	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	0	---	---
Lead	ppm	ASTM D5185m	>20	0	---	---
Copper	ppm	ASTM D5185m	>20	0	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is a high amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>20	4	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.2	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 283350	---	---
Particles >6µm		ASTM D7647	>1300	▲ 176554	---	---
Particles >14µm		ASTM D7647	>160	▲ 5999	---	---
Particles >21µm		ASTM D7647	>40	▲ 509	---	---
Particles >38µm		ASTM D7647	>10	9	---	---
Particles >71µm		ASTM D7647	>3	1	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 25/25/20	---	---
Silt	scalar	*Visual	NONE	▲ MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	---	---
Boron	ppm	ASTM D5185m	5	7	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	5	0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m	25	3	---	---
Calcium	ppm	ASTM D5185m	200	382	---	---
Phosphorus	ppm	ASTM D5185m	300	430	---	---
Zinc	ppm	ASTM D5185m	370	551	---	---
Sulfur	ppm	ASTM D5185m	2500	2795	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.27	---	---
Visc @ 40°C	cSt	ASTM D445	46	41.4	---	---

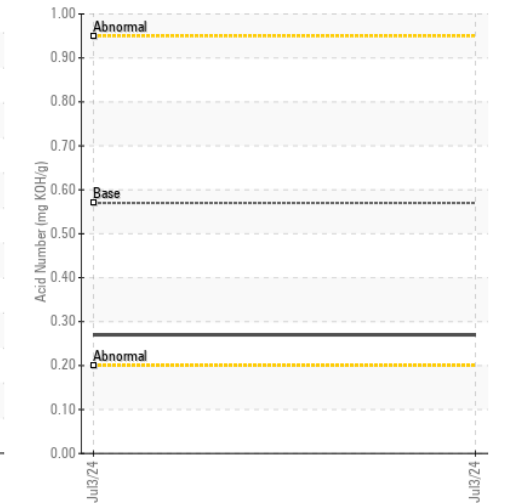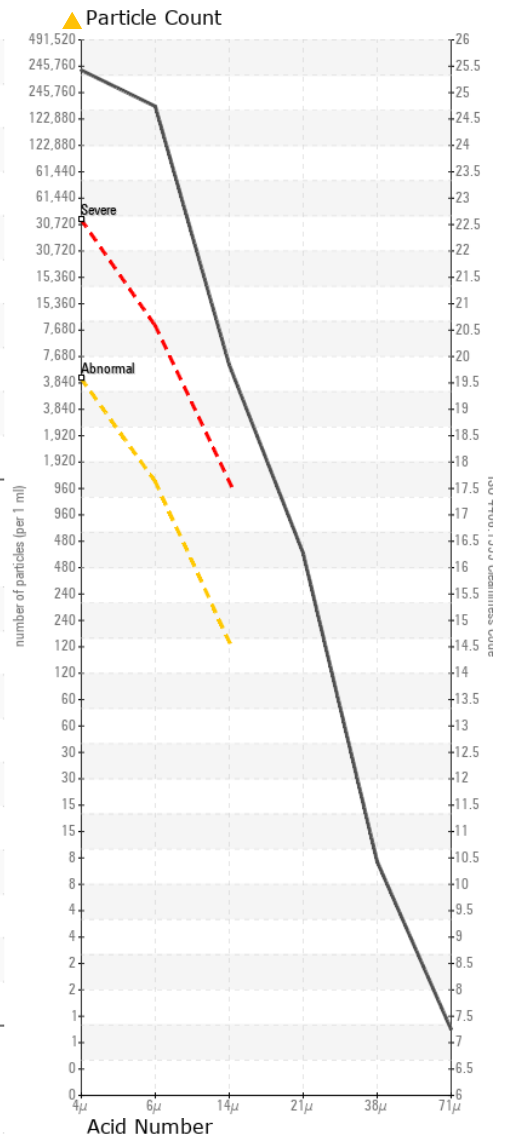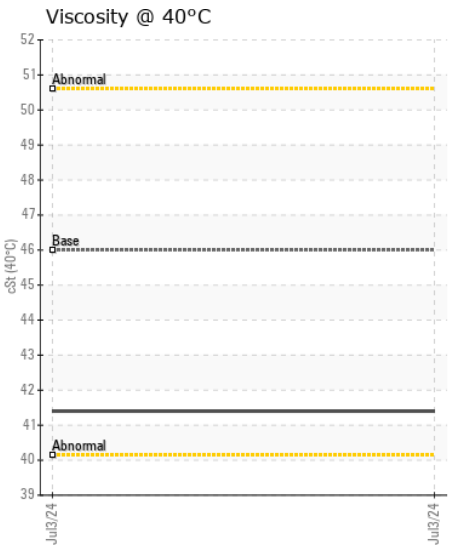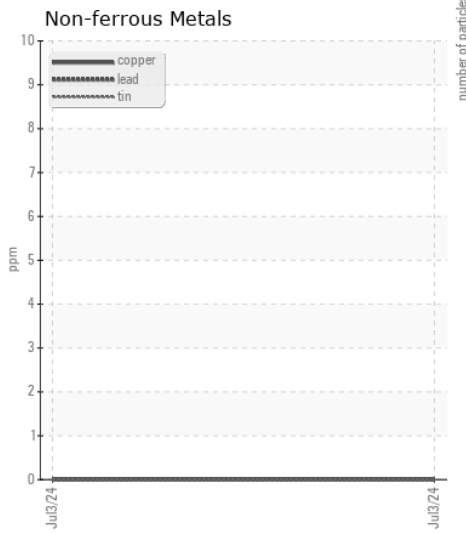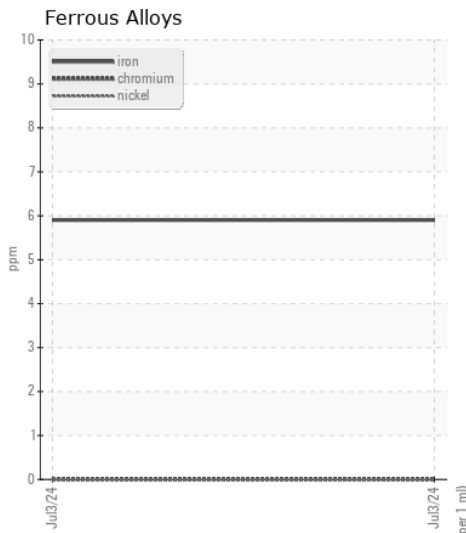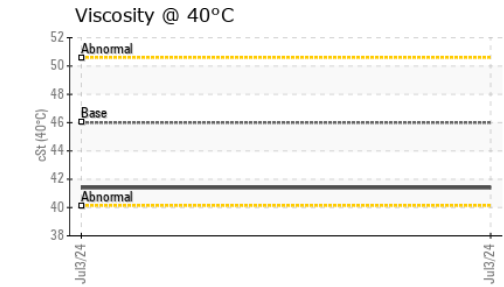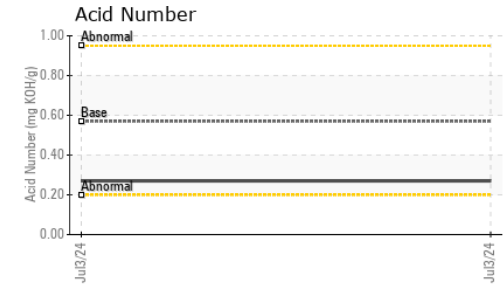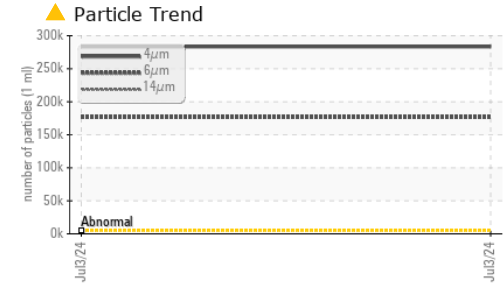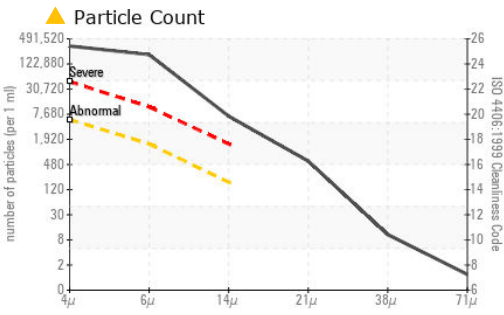

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : VCP433097
 Lab Number : 06233206
 Unique Number : 11116699
 Test Package : MOB 2

Received : 11 Jul 2024
 Tested : 12 Jul 2024
 Diagnosed : 12 Jul 2024 - Don Baldridge

SCOTT EQUIPMENT COMPANY LLC - Baton Rouge
 10160 AIRLINE HWY
 BATON ROUGE, LA
 US 70816

Contact: BRENT CALDWELL
 bcaldwell@scottcompanies.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (225)293-3683
 F: (225)292-9658