



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 350P 1FF350PAHPF000557
 Component
Left Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0225466	JR0208134	JR0199460
Sample Date		Client Info		27 Jun 2024	22 Mar 2024	19 Dec 2023
Machine Age	hrs	Client Info		2442	2001	1450
Oil Age	hrs	Client Info		0	2001	1450
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	N/A	None
Sample Status				NORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	92	340	211
Iron	ppm	ASTM D5185m	>750	238	705	470
Chromium	ppm	ASTM D5185m	>9	3	10	7
Nickel	ppm	ASTM D5185m	>10	<1	3	1
Titanium	ppm	ASTM D5185m		1	4	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>40	10	39	4
Lead	ppm	ASTM D5185m	>15	0	0	0
Copper	ppm	ASTM D5185m	>40	<1	2	<1
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	39	143	28
Potassium	ppm	ASTM D5185m	>20	4	8	2
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	7	2
Boron	ppm	ASTM D5185m		13	65	64
Barium	ppm	ASTM D5185m		0	2	3
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		4	12	9
Magnesium	ppm	ASTM D5185m		4	11	3
Calcium	ppm	ASTM D5185m		9	30	24
Phosphorus	ppm	ASTM D5185m		330	456	547
Zinc	ppm	ASTM D5185m		12	23	24
Sulfur	ppm	ASTM D5185m		15697	17078	15335
Visc @ 40°C	cSt	ASTM D445		145	185	186

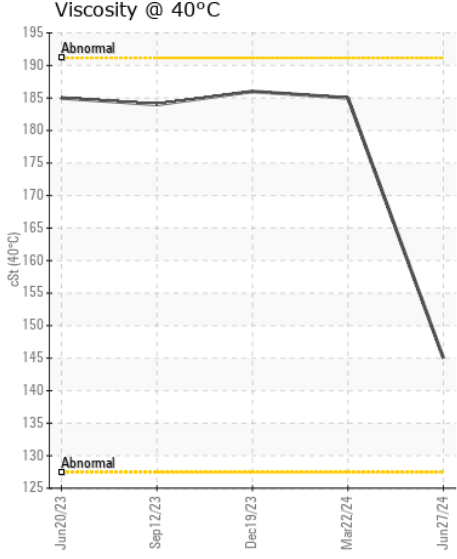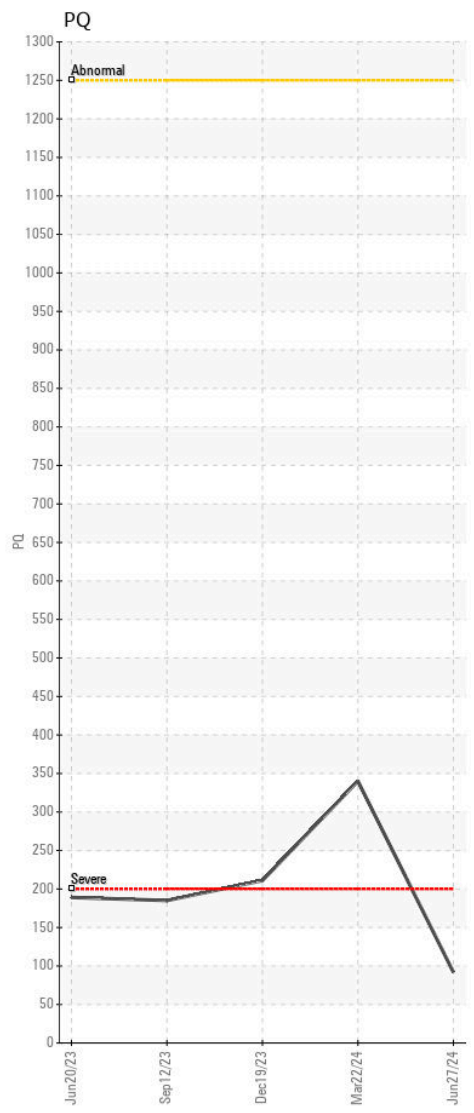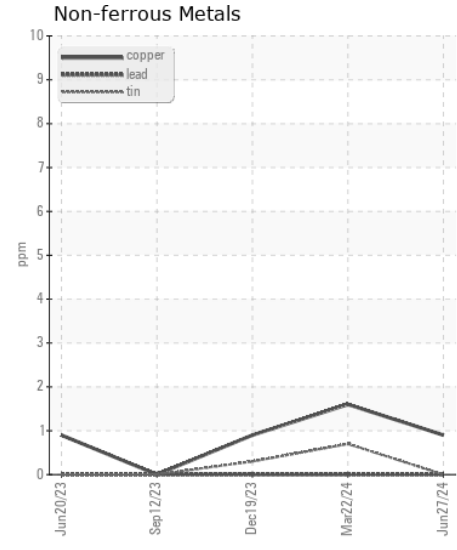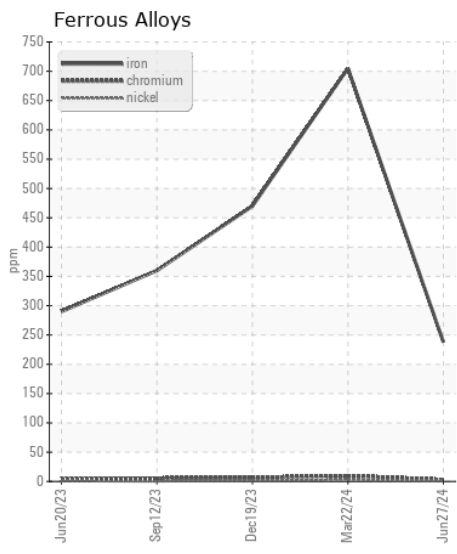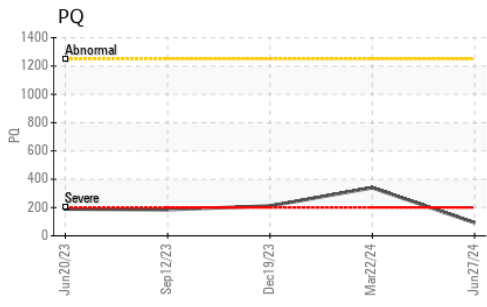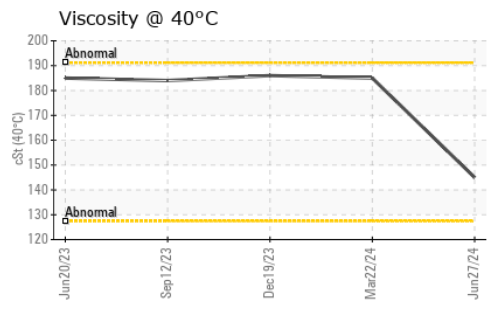

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0225466 **Received** : 11 Jul 2024
Lab Number : 06233513 **Tested** : 12 Jul 2024
Unique Number : 11117006 **Diagnosed** : 13 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

B & S SITE DEVELOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136
 Contact: DANNY HUFF
 dhuff@bandssite.com
 T: (540)270-3203
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)