



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 544 P 1DW544PAVPLZ18223**  
 Component  
**Front Axle**  
 Fluid  
**TDH FLUID SAE 75W80 (18 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TDH FLUID SAE 75W80. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0225419</b>	---	---
Sample Date		Client Info		<b>09 Jul 2024</b>	---	---
Machine Age	hrs	Client Info		<b>482</b>	---	---
Oil Age	hrs	Client Info		<b>482</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>None</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Test	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>70</b>	---	---
Iron	ppm	ASTM D5185m	>750	<b>152</b>	---	---
Chromium	ppm	ASTM D5185m	>11	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>21	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>49	<b>8</b>	---	---
Copper	ppm	ASTM D5185m	>101	<b>30</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	<b>20</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	<b>2</b>	---	---
Boron	ppm	ASTM D5185m	10	<b>4</b>	---	---
Barium	ppm	ASTM D5185m	10	<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m	10	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>8</b>	---	---
Magnesium	ppm	ASTM D5185m	100	<b>99</b>	---	---
Calcium	ppm	ASTM D5185m	3500	<b>3622</b>	---	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1004</b>	---	---
Zinc	ppm	ASTM D5185m	1150	<b>1236</b>	---	---
Sulfur	ppm	ASTM D5185m	5000	<b>4078</b>	---	---
Visc @ 40°C	cSt	ASTM D445	48	<b>52.0</b>	---	---

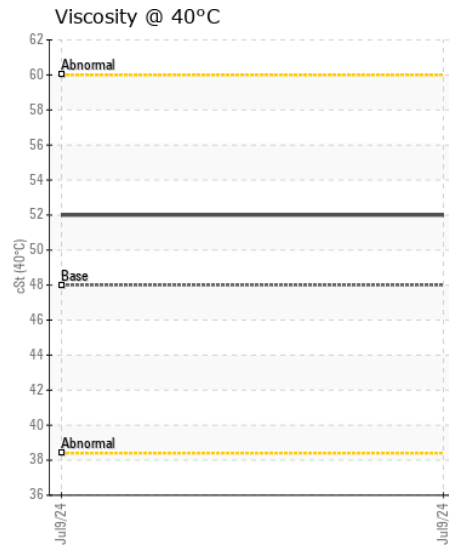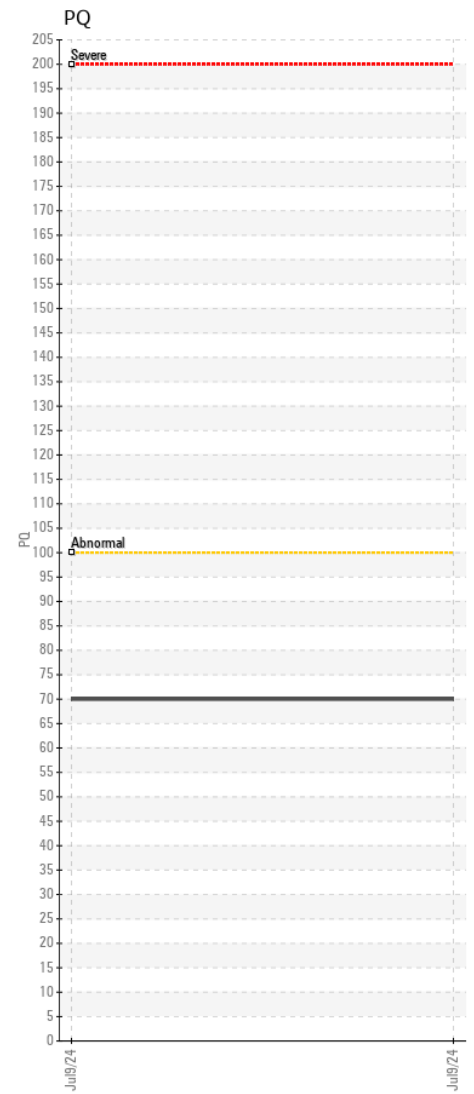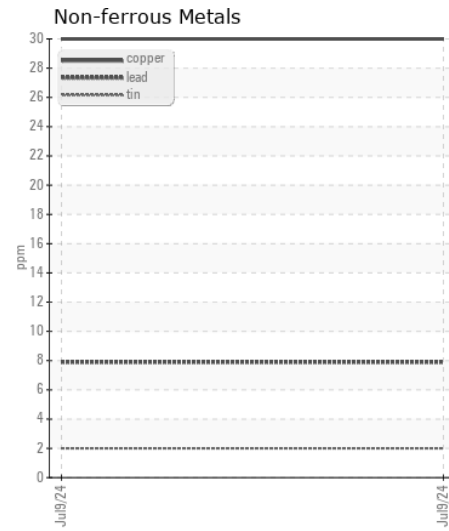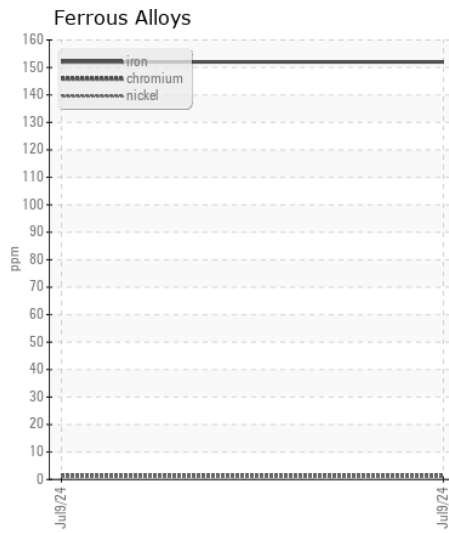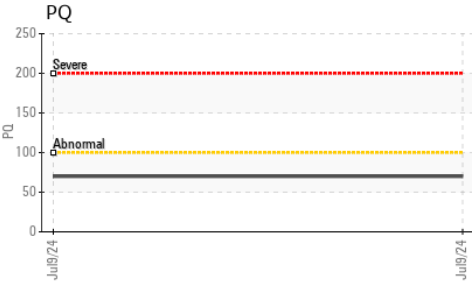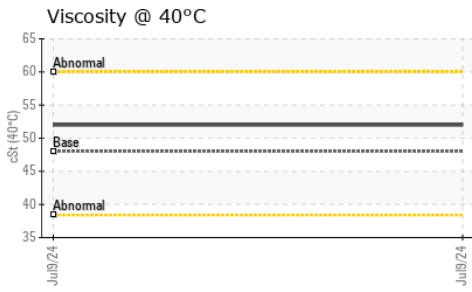

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0225419 **Received** : 11 Jul 2024  
**Lab Number** : 06233544 **Tested** : 12 Jul 2024  
**Unique Number** : 11117037 **Diagnosed** : 12 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - MANASSAS PARK**  
 9107 OWENS DRIVE  
 MANASSAS PARK, VA  
 US 20111

Contact: DON VEST  
 dvest@jamesriverequipment.com  
 T: (703)631-8500  
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)