



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2-276
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0895214	WC0871777	WC0834194
Sample Date		Client Info		23 Jun 2024	02 Apr 2024	29 Jan 2024
Machine Age	hrs	Client Info		2259	1526	768
Oil Age	hrs	Client Info		733	758	768
Filter Age	hrs	Client Info		733	758	768
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	18	16	32
Chromium	ppm	ASTM D5185m	>20	1	<1	1
Nickel	ppm	ASTM D5185m	>4	0	0	2
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	<1	<1
Aluminum	ppm	ASTM D5185m	>20	11	10	10
Lead	ppm	ASTM D5185m	>40	<1	0	<1
Copper	ppm	ASTM D5185m	>330	85	▲ 367	318
Tin	ppm	ASTM D5185m	>15	0	2	4
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	18	6	9
Potassium	ppm	ASTM D5185m	>20	35	38	32
Fuel		WC Method	>5	<1.0	<1.0	0.2
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.0	10.3	9.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.0	20.6	21.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	3	2	0
Boron	ppm	ASTM D5185m	250	17	36	46
Barium	ppm	ASTM D5185m	10	0	0	14
Molybdenum	ppm	ASTM D5185m	100	50	57	46
Manganese	ppm	ASTM D5185m		<1	1	2
Magnesium	ppm	ASTM D5185m	450	399	742	528
Calcium	ppm	ASTM D5185m	3000	2013	1371	1696
Phosphorus	ppm	ASTM D5185m	1150	783	689	748
Zinc	ppm	ASTM D5185m	1350	919	803	823
Sulfur	ppm	ASTM D5185m	4250	3021	2134	2379
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.9	19.8	22.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.9	6.4	7.5
Visc @ 100°C	cSt	ASTM D445	14.4	13.4	12.6	● 10.0

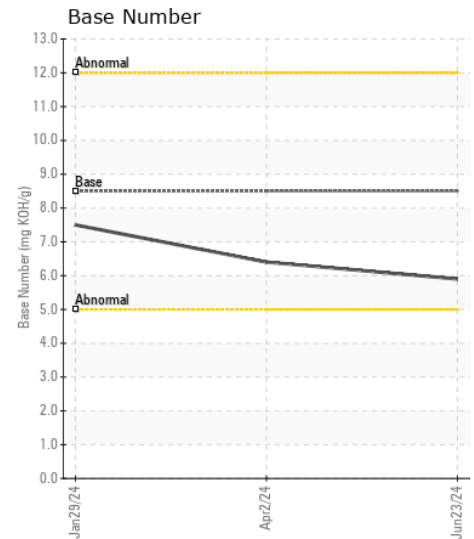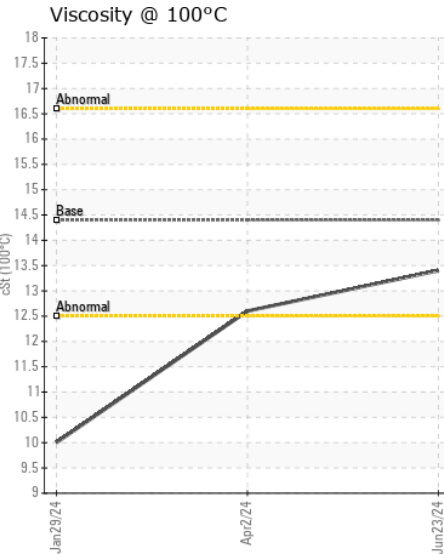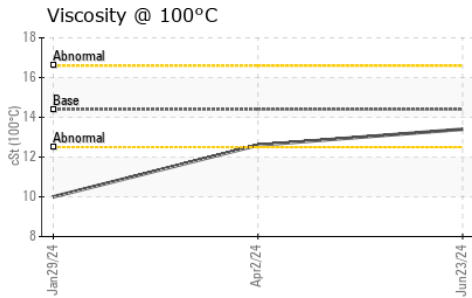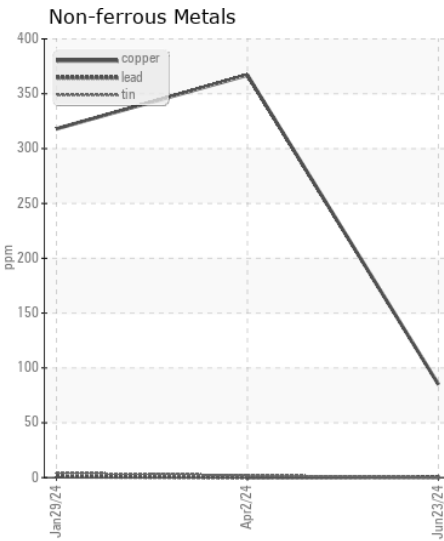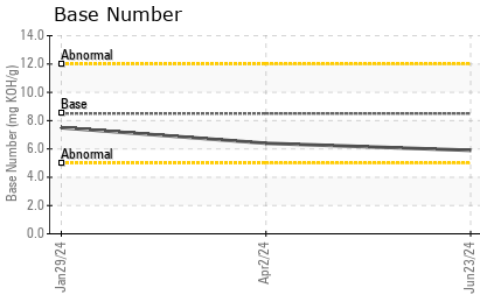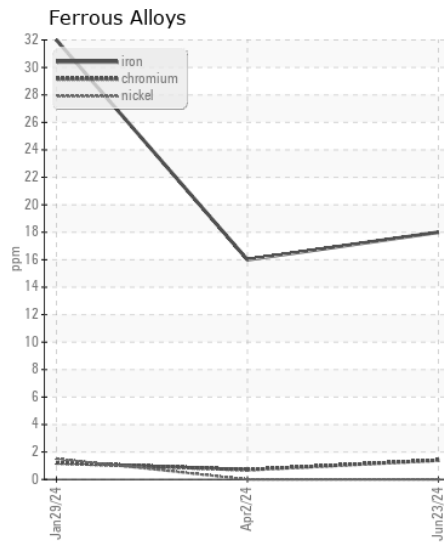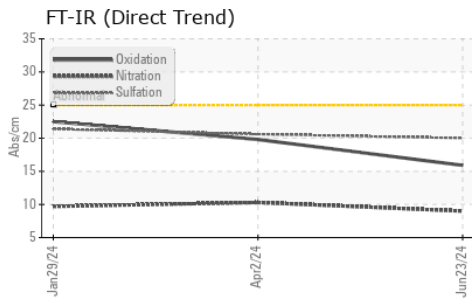

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0895214 **Received** : 11 Jul 2024
Lab Number : 06234311 **Tested** : 12 Jul 2024
Unique Number : 11123145 **Diagnosed** : 12 Jul 2024 - Wes Davis
Test Package : FLEET

ALASKA WEST EXPRESS
 1095 SANDURI STREET
 FAIRBANKS, AK
 US 99701
 Contact: TOM DOUTHIT
 tdouthit@lynden.com
 T: (907)452-4355
 F: (907)328-1956

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)