



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Area  
**(19C418)**  
Machine Id  
**829065-101269**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- Shots)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>GFL0093494</b>  | GFL0109416  | GFL0109344  |
| Sample Date    |     | Client Info |           | <b>10 Jul 2024</b> | 01 May 2024 | 04 Apr 2024 |
| Machine Age    | hrs | Client Info |           | <b>13046</b>       | 12929       | 12915       |
| Oil Age        | hrs | Client Info |           | <b>117</b>         | 230         | 216         |
| Filter Age     | hrs | Client Info |           | <b>117</b>         | 230         | 216         |
| Oil Changed    |     | Client Info |           | <b>Not Changd</b>  | Changed     | Not Changd  |
| Filter Changed |     | Client Info |           | <b>Not Changd</b>  | Changed     | Not Changd  |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

**WEAR**

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >90  | <b>4</b>     | 7    | 7    |
| Chromium     | ppm    | ASTM D5185m | >20  | <b>&lt;1</b> | <1   | 0    |
| Nickel       | ppm    | ASTM D5185m | >2   | <b>&lt;1</b> | 3    | 3    |
| Titanium     | ppm    | ASTM D5185m | >2   | <b>7</b>     | <1   | 0    |
| Silver       | ppm    | ASTM D5185m | >2   | <b>0</b>     | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >20  | <b>3</b>     | 2    | 2    |
| Lead         | ppm    | ASTM D5185m | >40  | <b>0</b>     | <1   | 0    |
| Copper       | ppm    | ASTM D5185m | >330 | <b>1</b>     | 3    | 2    |
| Tin          | ppm    | ASTM D5185m | >15  | <b>0</b>     | 0    | 0    |
| Vanadium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | <1   | 0    |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

**CONTAMINATION**








There is no indication of any contamination in the oil.

|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >25   | <b>2</b>       | 2     | 4     |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>2</b>       | 0     | <1    |
| Fuel             |          | WC Method   | >3.0  | <b>&lt;1.0</b> | <1.0  | <1.0  |
| Water            |          | WC Method   | >0.2  | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 | >6    | <b>0.1</b>     | 0.2   | 0.2   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>5.3</b>     | 6.1   | 6.1   |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>17.5</b>    | 17.4  | 17.6  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | LIGHT |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.2  | <b>NEG</b>     | NEG   | NEG   |

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |             |      |      |
|------------------|----------|-------------|------|-------------|------|------|
| Sodium           | ppm      | ASTM D5185m |      | <b>2</b>    | 6    | 5    |
| Boron            | ppm      | ASTM D5185m | 0    | <b>8</b>    | 0    | 1    |
| Barium           | ppm      | ASTM D5185m | 0    | <b>0</b>    | 0    | 0    |
| Molybdenum       | ppm      | ASTM D5185m | 60   | <b>55</b>   | 63   | 58   |
| Manganese        | ppm      | ASTM D5185m | 0    | <b>0</b>    | <1   | 0    |
| Magnesium        | ppm      | ASTM D5185m | 1010 | <b>889</b>  | 993  | 1003 |
| Calcium          | ppm      | ASTM D5185m | 1070 | <b>1164</b> | 1117 | 1113 |
| Phosphorus       | ppm      | ASTM D5185m | 1150 | <b>1038</b> | 1107 | 1114 |
| Zinc             | ppm      | ASTM D5185m | 1270 | <b>1205</b> | 1249 | 1302 |
| Sulfur           | ppm      | ASTM D5185m | 2060 | <b>2833</b> | 3798 | 4034 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>13.1</b> | 13.5 | 13.7 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 9.8  | <b>9.2</b>  | 8.7  | 9.0  |
| Visc @ 100°C     | cSt      | ASTM D445   | 15.4 | <b>14.2</b> | 13.8 | 13.8 |

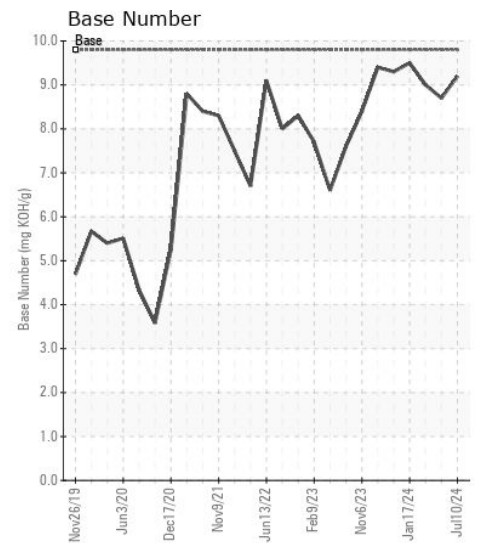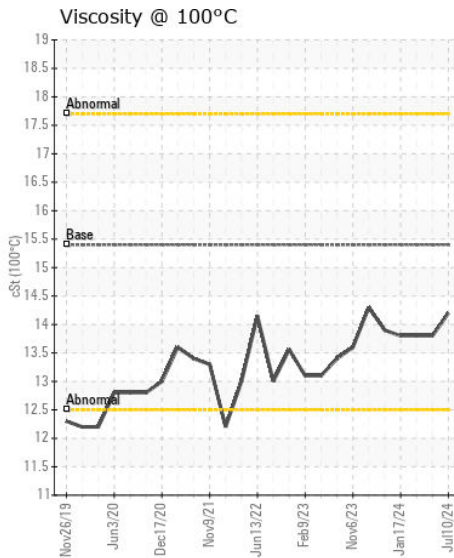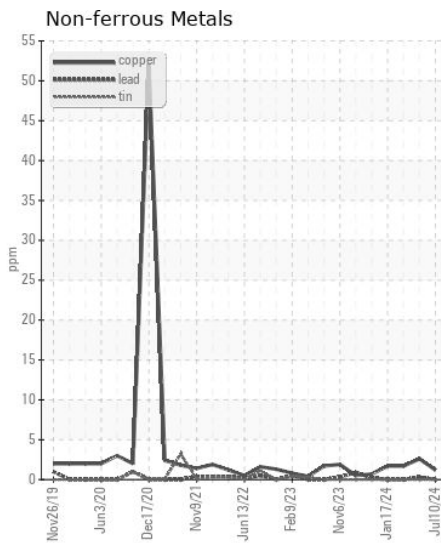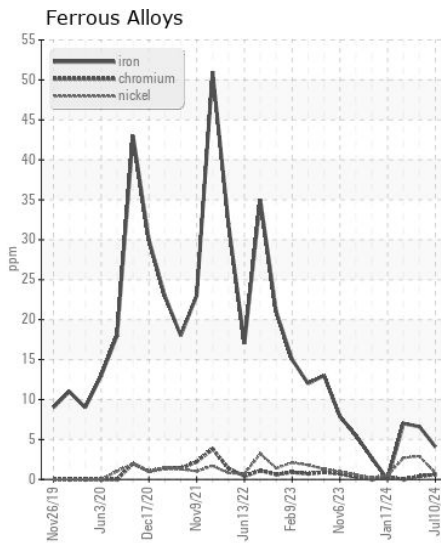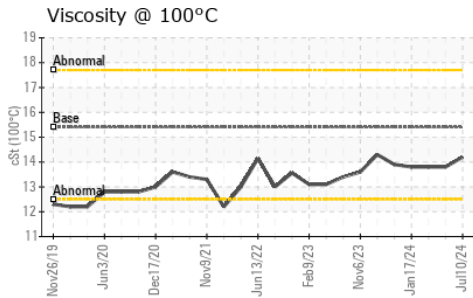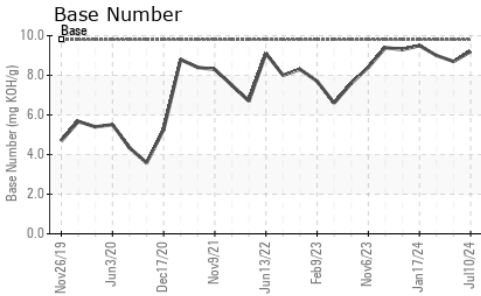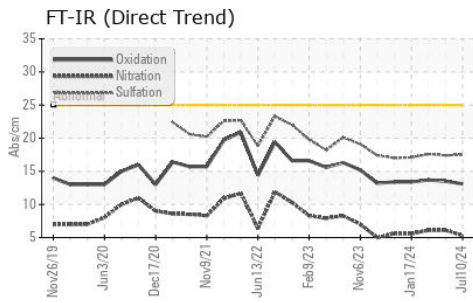

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0093494  
**Lab Number** : 06234664  
**Unique Number** : 11123498  
**Test Package** : FLEET

**Received** : 12 Jul 2024  
**Tested** : 15 Jul 2024  
**Diagnosed** : 15 Jul 2024 - Wes Davis

**GFL Environmental - 892 - Pauls Valley Hauling**  
 1910 S CHICKASAW STREET  
 Pauls Valley, OK  
 US 73075  
 Contact: Tony Graham  
 tgraham2@wcamerica.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: