



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 5 - Cross Lanes [152932]
 Machine Id
JOHN DEERE 75P 1FF075PAERJ000375
 Component
Hydraulic System
 Fluid
HITACHI HYDRAULIC SUPER EX 46HN (26 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0050825	---	---
Sample Date		Client Info		09 Jul 2024	---	---
Machine Age	hrs	Client Info		8	---	---
Oil Age	hrs	Client Info		8	---	---
Filter Age	hrs	Client Info		8	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	20	---	---
Iron	ppm	ASTM D5185m	>32	0	---	---
Chromium	ppm	ASTM D5185m	>9	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>9	0	---	---
Lead	ppm	ASTM D5185m	>28	0	---	---
Copper	ppm	ASTM D5185m	>50	<1	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>11	<1	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.075	NEG	---	---
Particles >4µm		ASTM D7647	>80000	6456	---	---
Particles >6µm		ASTM D7647	>20000	1334	---	---
Particles >14µm		ASTM D7647	>640	50	---	---
Particles >21µm		ASTM D7647	>160	8	---	---
Particles >38µm		ASTM D7647	>40	1	---	---
Particles >71µm		ASTM D7647	>10	0	---	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	20/18/13	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	2	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		4	---	---
Calcium	ppm	ASTM D5185m		10	---	---
Phosphorus	ppm	ASTM D5185m	827	480	---	---
Zinc	ppm	ASTM D5185m	0	38	---	---
Sulfur	ppm	ASTM D5185m	13	589	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.083	---	---
Visc @ 40°C	cSt	ASTM D445	47	46.3	---	---

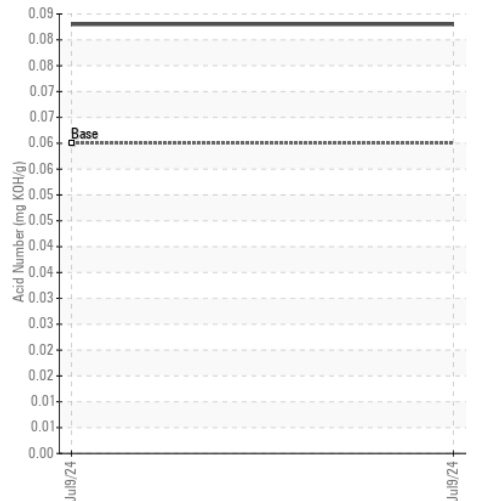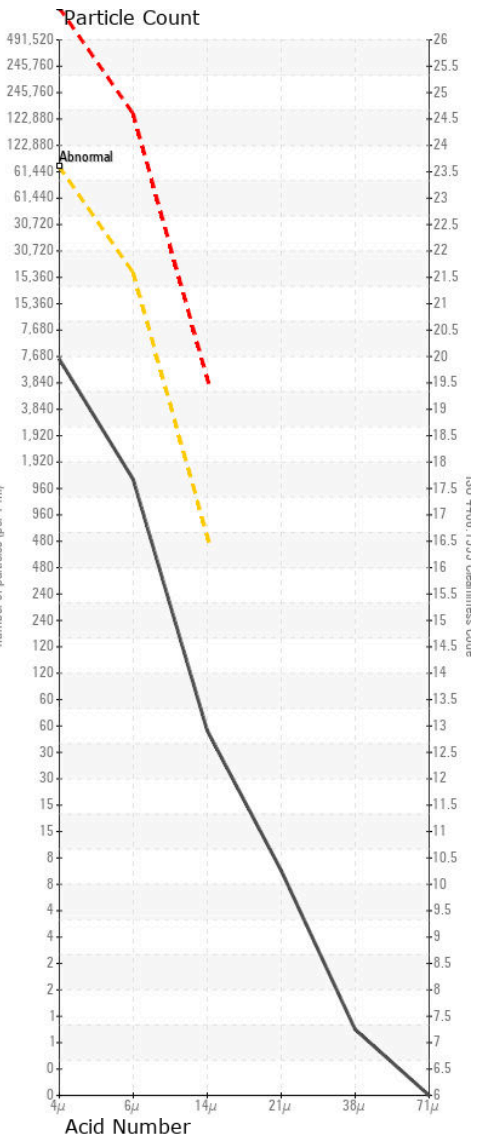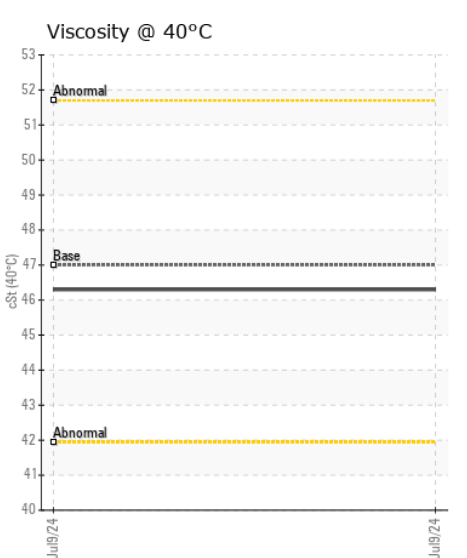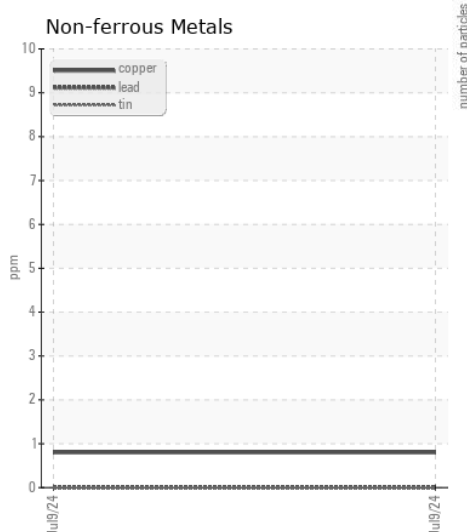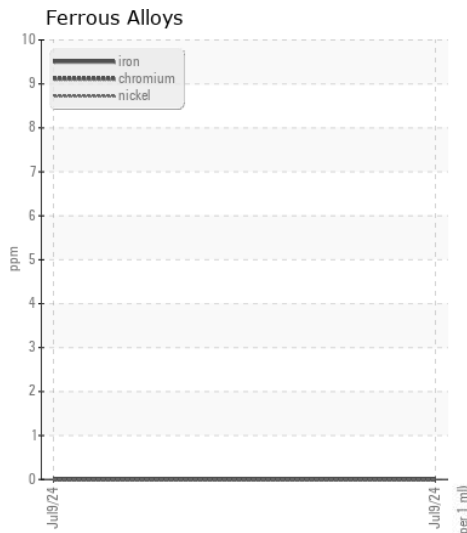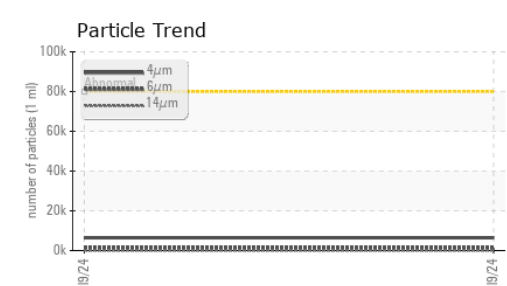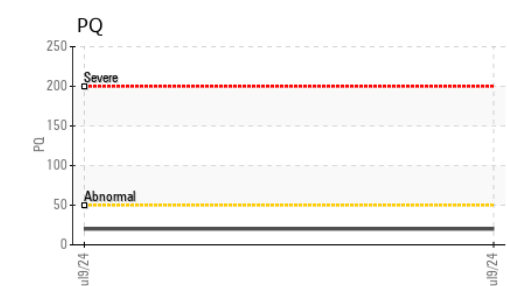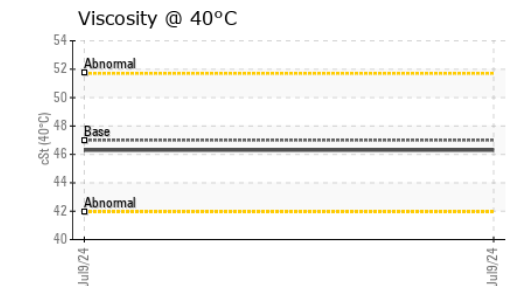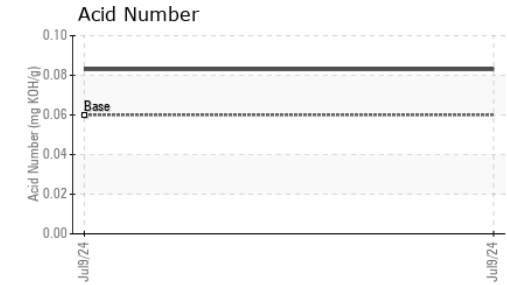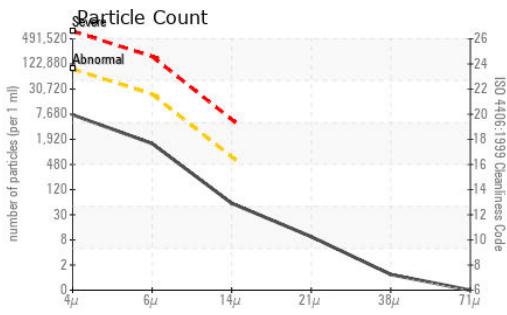

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0050825 **Received** : 12 Jul 2024
Lab Number : 06234783 **Tested** : 15 Jul 2024
Unique Number : 11123617 **Diagnosed** : 15 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)