



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 26G 1FF026GXCKK265457**  
 Component  
**Rear Left Final Drive**  
 Fluid  
**JOHN DEERE GL-5 80W90 (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### WEAR

All component wear rates are normal.








### CONTAMINATION

There is a light concentration of water present in the oil. Moderate concentration of visible dirt/debris present in the oil.

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0223585</b>	---	---
Sample Date		Client Info		<b>11 Jul 2024</b>	---	---
Machine Age	hrs	Client Info		<b>202</b>	---	---
Oil Age	hrs	Client Info		<b>202</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changd</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---
PQ		ASTM D8184	>1250	<b>41</b>	---	---
Iron	ppm	ASTM D5185m	>750	<b>30</b>	---	---
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>40	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>15	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>40	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silicon	ppm	ASTM D5185m	>75	<b>1</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water	%	ASTM D6304	>0.075	<b>▲ 0.144</b>	---	---
ppm Water	ppm	ASTM D6304	>750	<b>▲ 1440</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>▲ MODER</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.075	<b>▲ 0.2%</b>	---	---
Sodium	ppm	ASTM D5185m	>51	<b>&lt;1</b>	---	---
Boron	ppm	ASTM D5185m		<b>289</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>2</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>6</b>	---	---
Calcium	ppm	ASTM D5185m		<b>199</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1767</b>	---	---
Zinc	ppm	ASTM D5185m		<b>65</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>18737</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>153</b>	---	---

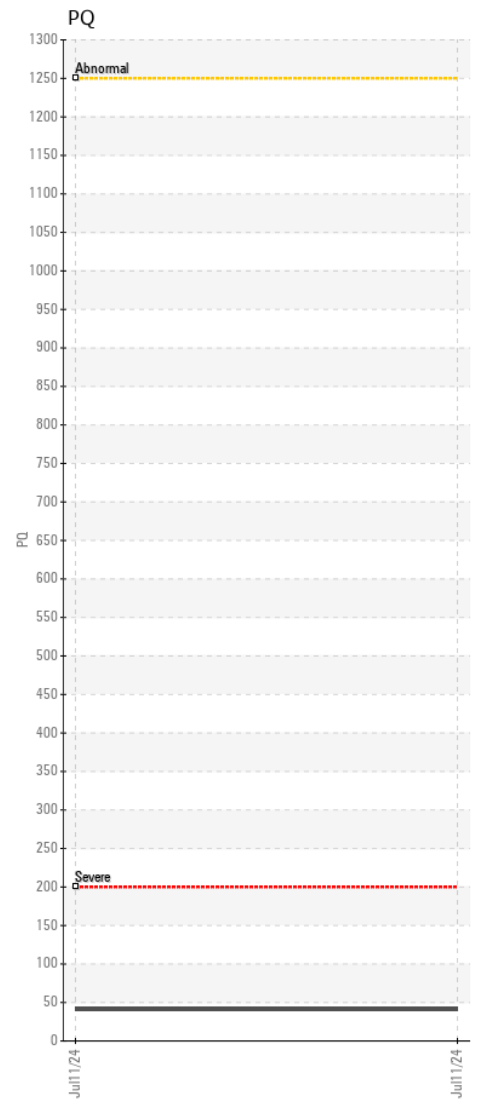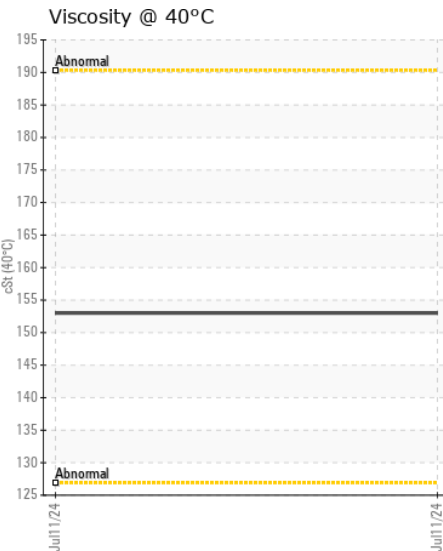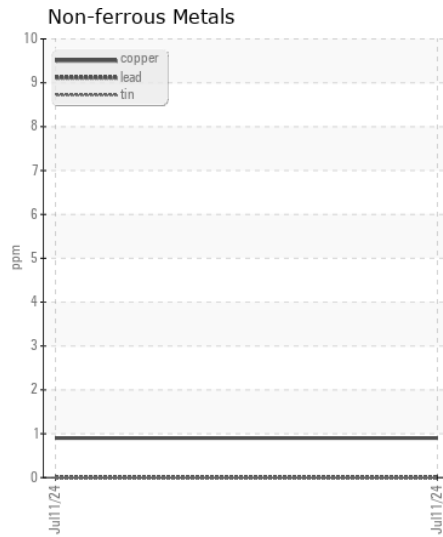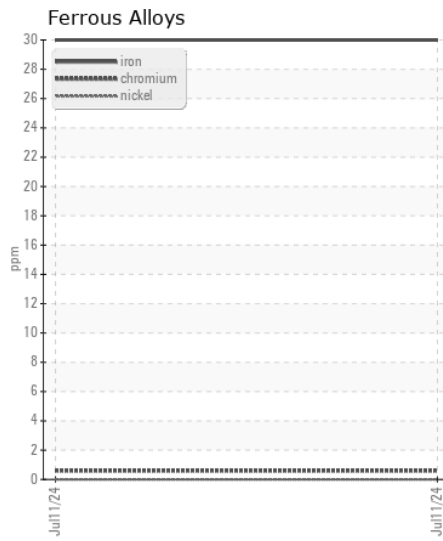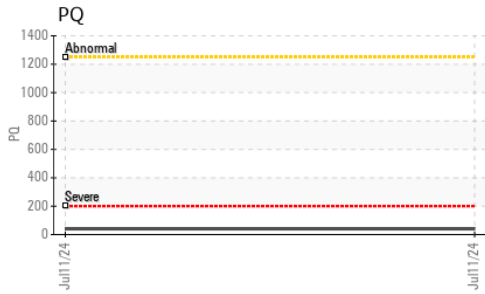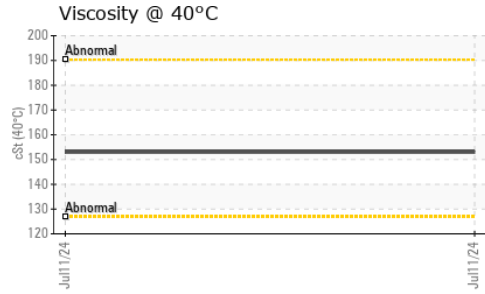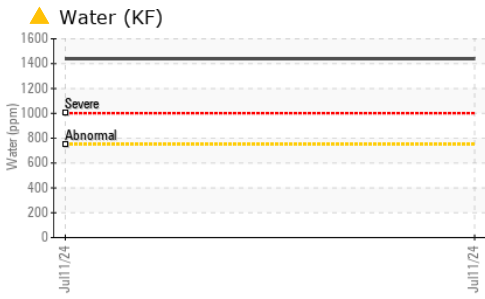

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0223585 **Received** : 12 Jul 2024  
**Lab Number** : 06235166 **Tested** : 15 Jul 2024  
**Unique Number** : 11124000 **Diagnosed** : 15 Jul 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: KF, PQ )

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409  
 Contact: CHRIS FRAZIER  
 cfrazier@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (336)665-9556