



PacLease

# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**8591790**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0019749</b>	RPL0016233	RPL0016206
Sample Date		Client Info		<b>03 Jul 2024</b>	13 Mar 2024	20 Nov 2023
Machine Age	mls	Client Info		<b>31178</b>	29224	26988
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	<b>26</b>	26	8
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	6	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>3</b>	5	2
Tin	ppm	ASTM D5185m	>15	<b>0</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	9	4
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.9</b>	0.7	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.0</b>	11.2	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.6</b>	21.1	20.3
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>6</b>	6	3
Boron	ppm	ASTM D5185m	0	<b>47</b>	84	87
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>91</b>	133	85
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	0	<b>618</b>	824	612
Calcium	ppm	ASTM D5185m		<b>1426</b>	1863	1265
Phosphorus	ppm	ASTM D5185m		<b>732</b>	972	716
Zinc	ppm	ASTM D5185m		<b>850</b>	1164	847
Sulfur	ppm	ASTM D5185m		<b>3057</b>	3739	2760
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>23.1</b>	20.5	17.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>6.0</b>	6.7	7.7
Visc @ 100°C	cSt	ASTM D445	14	<b>13.4</b>	13.2	13.5

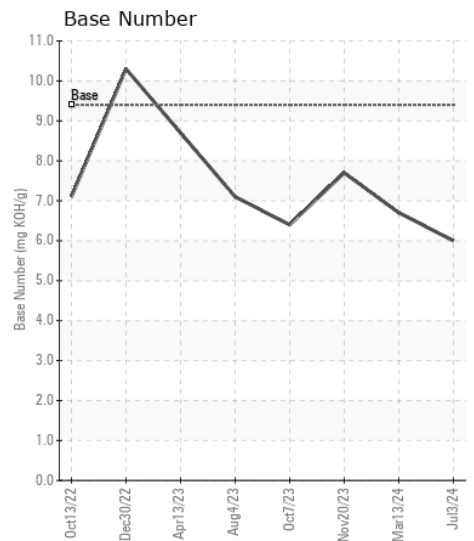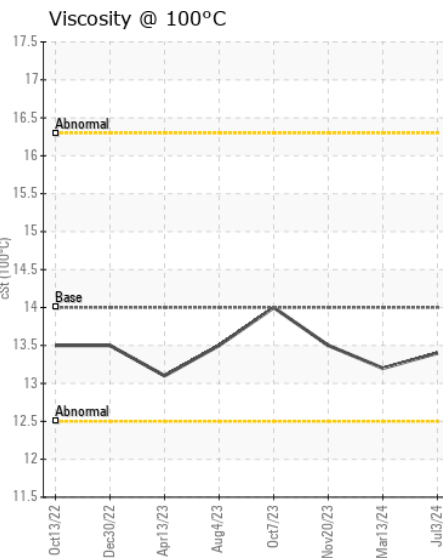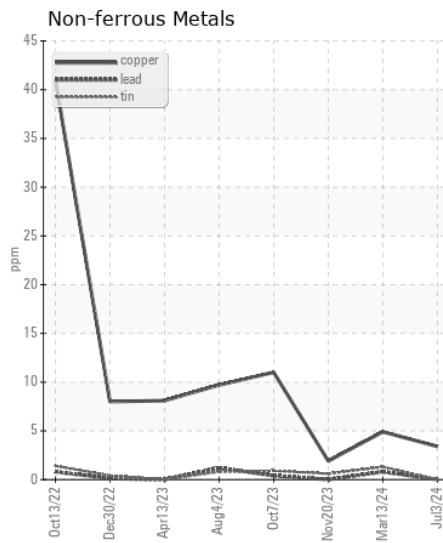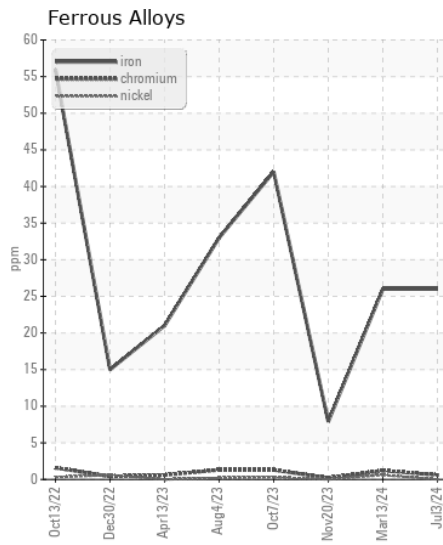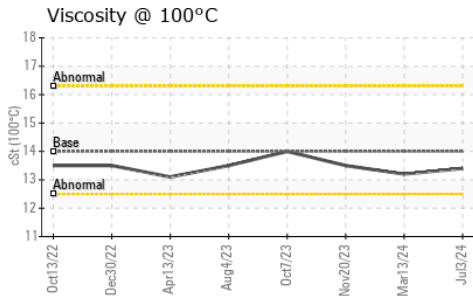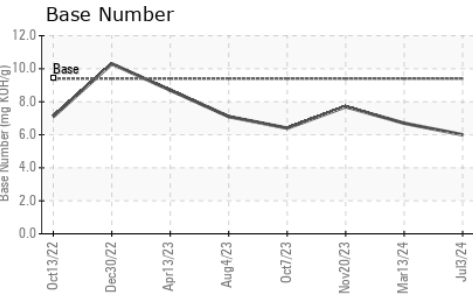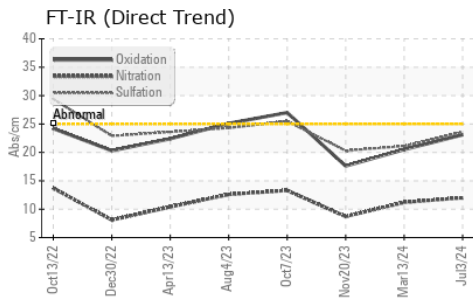

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0019749  
**Lab Number** : 06235626  
**Unique Number** : 11124460  
**Test Package** : FLEET

**RTL PACLEASE - 7051 - Las Vegas**  
 4150 Arctic Spring Ave  
 North Las Vegas, NV  
 US 89115  
 Contact: Rudy Trevizo  
 TrevizoR@RushEnterprises.Com  
 T: (702)208-7164  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)