



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W67884]

Machine Id
WIRTGEN WR240I 10WR1576

Component
Rear Right Bearing

Fluid
GEAR OIL (PAG) ISO 150 (2 QTS)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W67884)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0220543	---	---
Sample Date		Client Info		11 Jul 2024	---	---
Machine Age	hrs	Client Info		232	---	---
Oil Age	hrs	Client Info		232	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		35	---	---
Iron	ppm	ASTM D5185m	>200	12	---	---
Chromium	ppm	ASTM D5185m	>5	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m	>5	0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	0	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>150	0	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<1	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

Viscosity of sample indicates oil is within ISO 220 range, advise investigate. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	5	0	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	5	0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m	5	3	---	---
Calcium	ppm	ASTM D5185m	5	8	---	---
Phosphorus	ppm	ASTM D5185m	775	497	---	---
Zinc	ppm	ASTM D5185m	5	11	---	---
Sulfur	ppm	ASTM D5185m	2000	944	---	---
Visc @ 40°C	cSt	ASTM D445	150	220	---	---

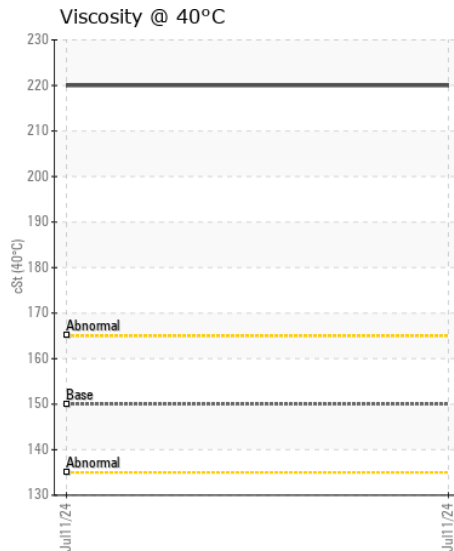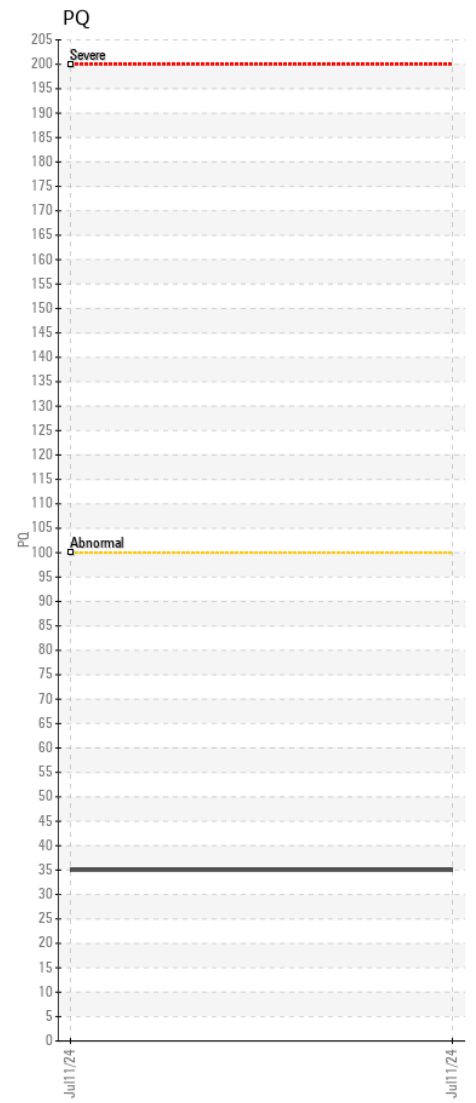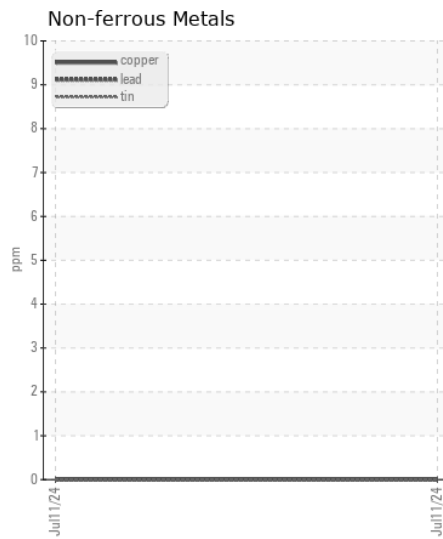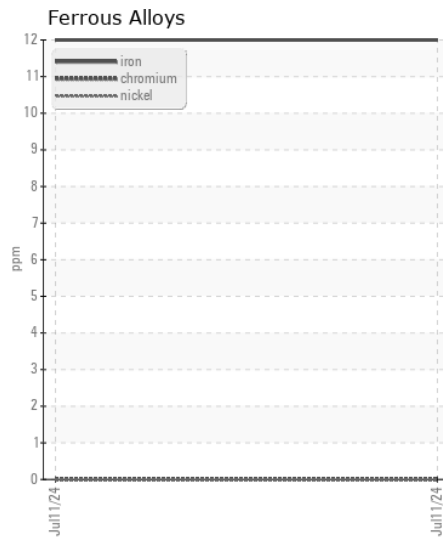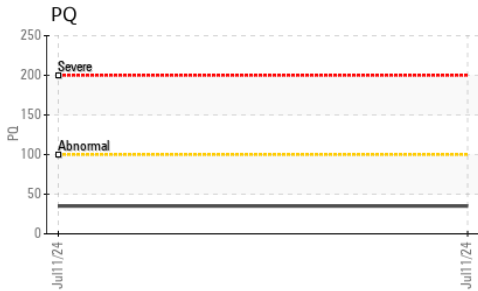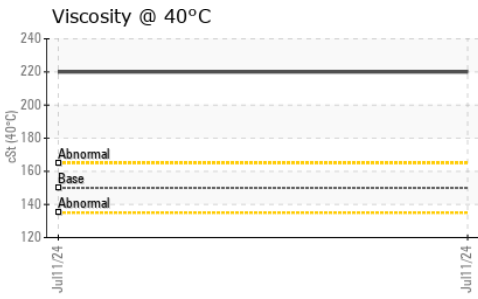

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0220543 **Received** : 15 Jul 2024
Lab Number : 06236338 **Tested** : 16 Jul 2024
Unique Number : 11125172 **Diagnosed** : 16 Jul 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269

Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211
 F: (704)596-6198