



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL



Machine Id
JOHN DEERE 300DII 513 - 2ND AXLE (S/N 1DW300DXJFE667370)

Component
Right Differential

Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0960432	---	---
Sample Date		Client Info		31 May 2024	---	---
Machine Age	hrs	Client Info		7801	---	---
Oil Age	hrs	Client Info		3149	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

Moderate concentration of visible metal present. All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	21	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	3	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>100	6	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	▲ MODER	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The AN level is at the top-end of the recommended limit.

Sodium	ppm	ASTM D5185m		1	---	---
Boron	ppm	ASTM D5185m		<1	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m		0	---	---
Phosphorus	ppm	ASTM D5185m		2334	---	---
Zinc	ppm	ASTM D5185m		10	---	---
Sulfur	ppm	ASTM D5185m		26040	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		▲ 4.14	---	---
Visc @ 40°C	cSt	ASTM D445		146	---	---

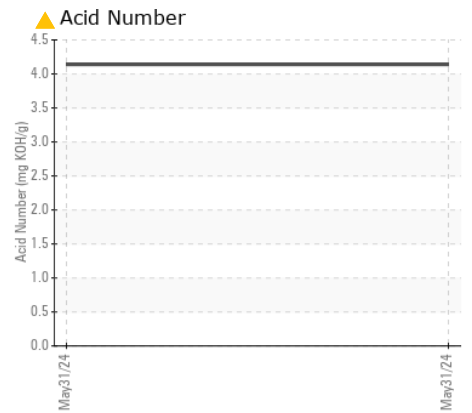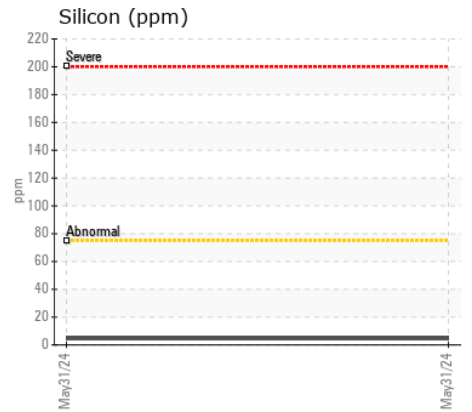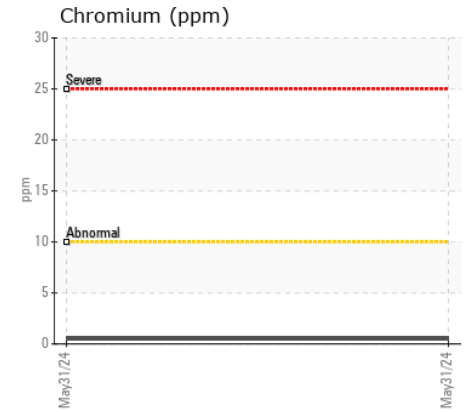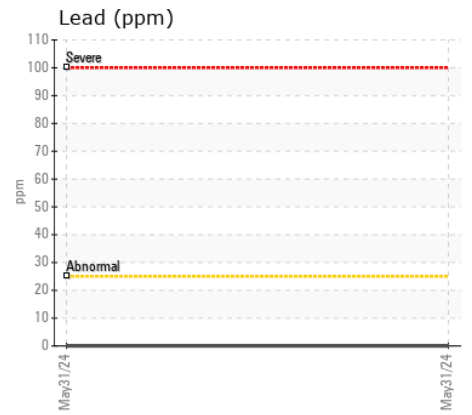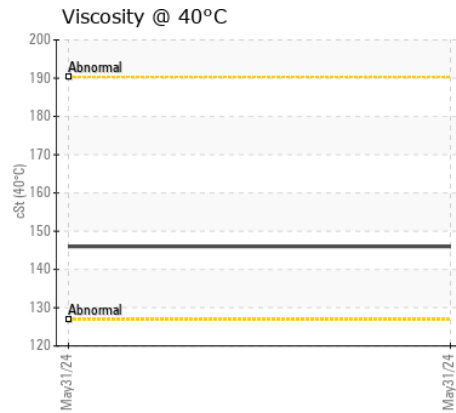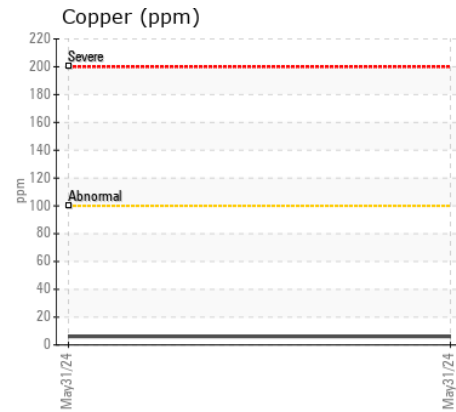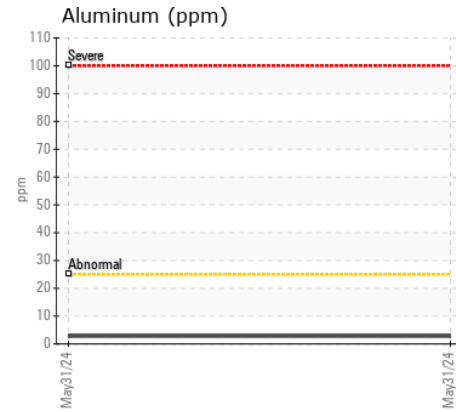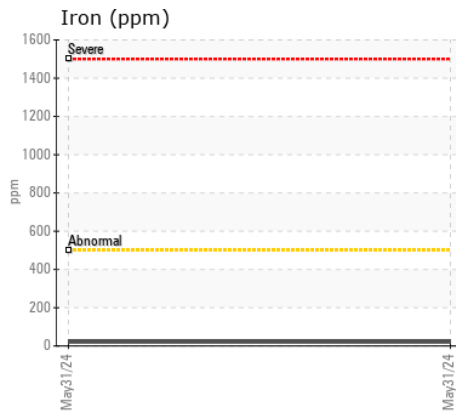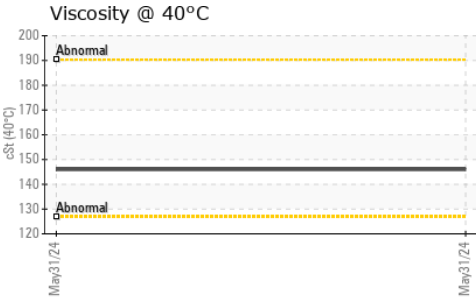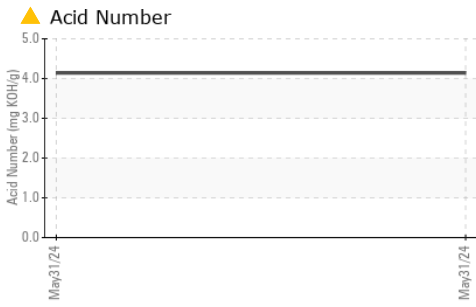

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0960432
Lab Number : 06237001
Unique Number : 11125835
Test Package : MOB 2

Received : 15 Jul 2024
Tested : 18 Jul 2024
Diagnosed : 18 Jul 2024 - Jonathan Hester

BIG 4 INC
 301 WORTH ST
 HEMPHILL, TX
 US 75948

Contact: JODIE MCGEE
 jodie.mcgee@big4inc.com
 T: (936)275-7532
 F: (409)787-2071

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)