



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Machine Id
JOHN DEERE 2014300D11 510 (S/N 1DW300DXCEE662162)
 Component
Front Differential
 Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0960425	---	---
Sample Date		Client Info		22 Jun 2024	---	---
Machine Age	hrs	Client Info		9087	---	---
Oil Age	hrs	Client Info		1972	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	62	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	3	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>100	4	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	3	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The AN level is at the top-end of the recommended limit.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		53	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		20	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m		12	---	---
Phosphorus	ppm	ASTM D5185m		2040	---	---
Zinc	ppm	ASTM D5185m		18	---	---
Sulfur	ppm	ASTM D5185m		23759	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		▲ 3.70	---	---
Visc @ 40°C	cSt	ASTM D445		148	---	---

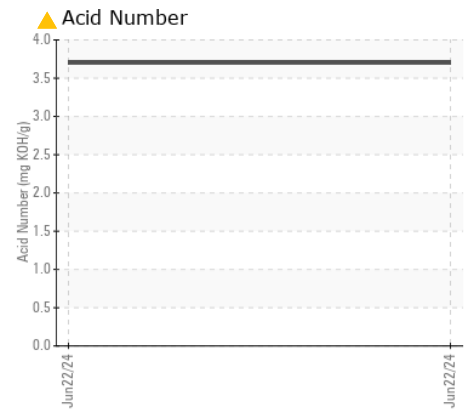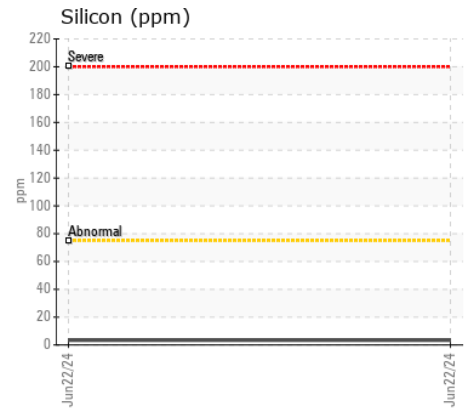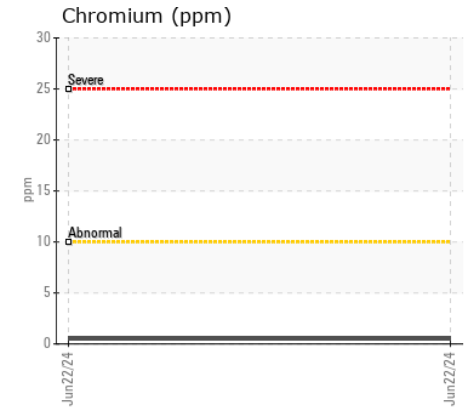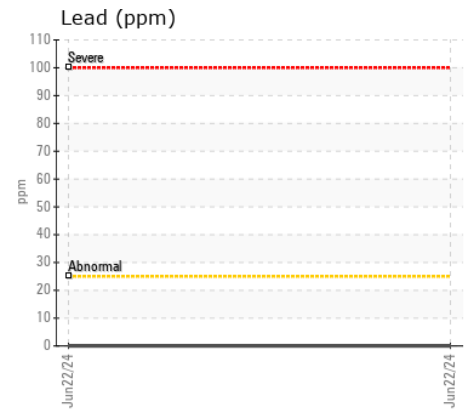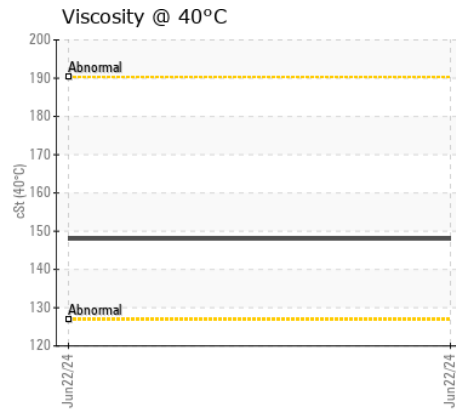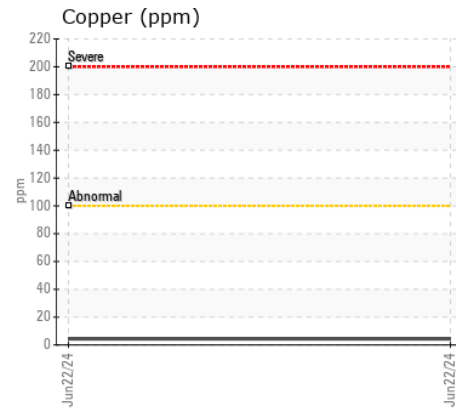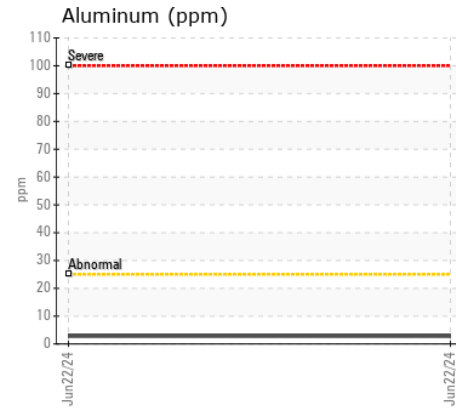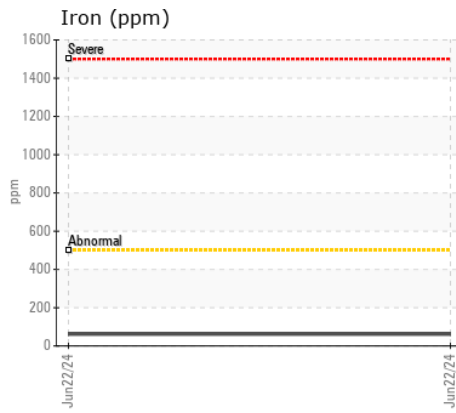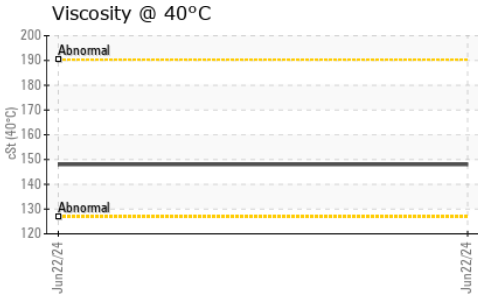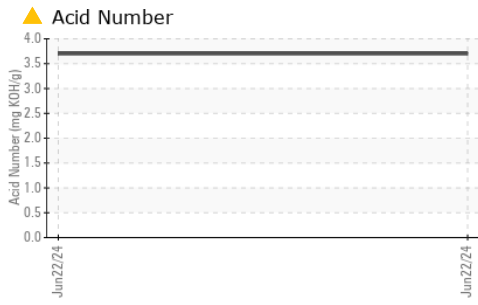

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0960425
Lab Number : 06237005
Unique Number : 11125839
Test Package : MOB 2
Received : 15 Jul 2024
Tested : 18 Jul 2024
Diagnosed : 18 Jul 2024 - Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BIG 4 INC
 301 WORTH ST
 HEMPHILL, TX
 US 75948

Contact: JODIE MCGEE
 jodie.mcgee@big4inc.com
 T: (936)275-7532
 F: (409)787-2071