



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FSP133922 (S/N 1FVHCSCY6EHFA8753)
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0945797	WC0903100	WC0409152
Sample Date		Client Info		15 Jul 2024	25 Apr 2024	15 Dec 2019
Machine Age	mls	Client Info		378385	0	237835
Oil Age	mls	Client Info		6000	60000	10662
Filter Age	mls	Client Info		6000	60000	10662
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	14	22	12
Chromium	ppm	ASTM D5185m	>5	<1	2	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>30	7	7	3
Lead	ppm	ASTM D5185m	>30	0	1	1
Copper	ppm	ASTM D5185m	>150	0	2	1
Tin	ppm	ASTM D5185m	>5	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	8	9	7
Potassium	ppm	ASTM D5185m	>20	13	9	0
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.8	0.5
Nitration	Abs/cm	*ASTM D7624	>20	8.4	9.4	10.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.4	21.7	21.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	4	4	6
Boron	ppm	ASTM D5185m	250	73	4	23
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	54	66	28
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	509	575	266
Calcium	ppm	ASTM D5185m	3000	1660	1644	2224
Phosphorus	ppm	ASTM D5185m	1150	895	1245	997
Zinc	ppm	ASTM D5185m	1350	1048	1315	1199
Sulfur	ppm	ASTM D5185m	4250	3248	4086	2805
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.4	17.9	15.7
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.8	8.1	7.4
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	13.6	14.0


FT-IR (Direct Trend)

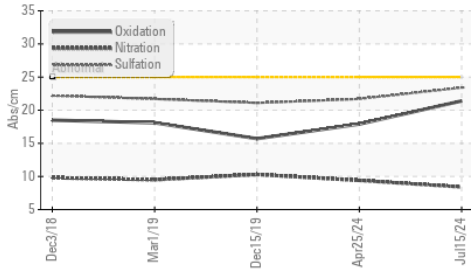


Ferrous Alloys

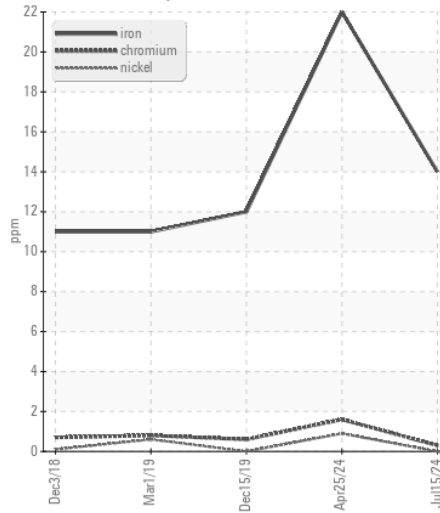


Base Number

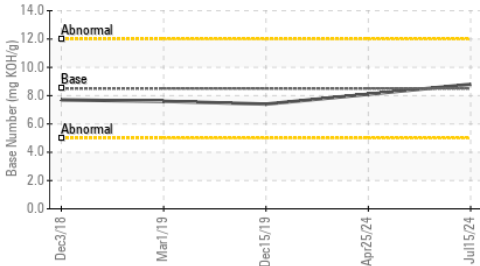


Non-ferrous Metals

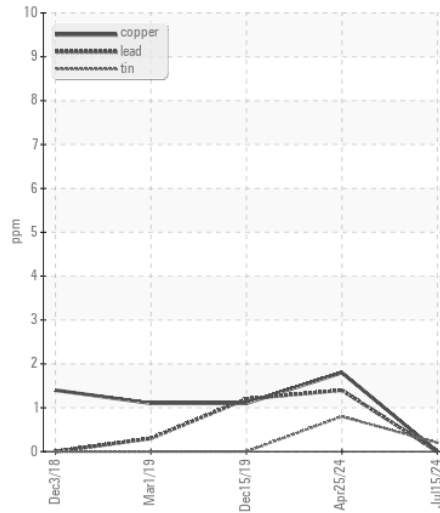


Viscosity @ 100°C

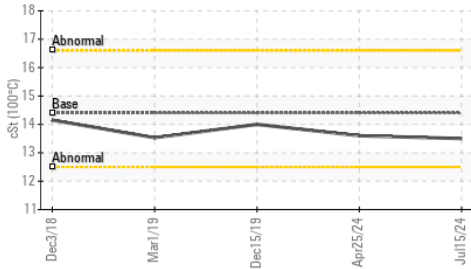

Viscosity @ 100°C

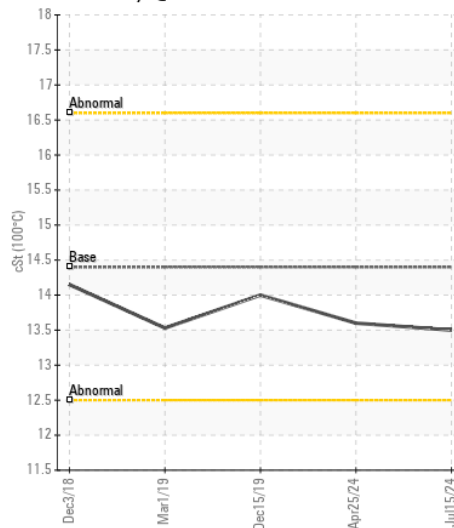

Base Number

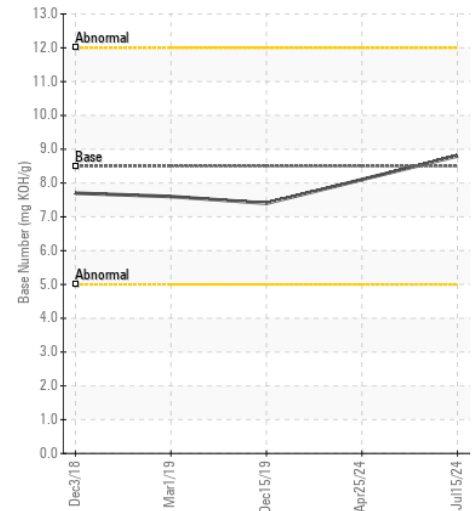

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0945797
Lab Number : 06237275
Unique Number : 11126109
Test Package : FLEET
Received : 15 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 17 Jul 2024 - Wes Davis

FRESHPOINT
 8801 EXCHANGE DRIVE
 ORLANDO, FL
 US 32809
 Contact: CRAIG EVANS
 evans_craig@sbcglobal.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: