



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[729229 PRIMORIS ENER]**

Machine Id  
**VOLVO A40G 352782**

Component  
**Diesel Engine**

Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP449863</b>	VCP432334	VCP397261
Sample Date		Client Info		<b>18 Jun 2024</b>	29 Jan 2024	17 Jan 2023
Machine Age	hrs	Client Info		<b>4543</b>	4045	2952
Oil Age	hrs	Client Info		<b>500</b>	0	500
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>8</b>	12	11
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>10	<b>6</b>	12	6
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>3</b>	4	2
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	1
Copper	ppm	ASTM D5185m	>20	<b>6</b>	16	▲ 26
Tin	ppm	ASTM D5185m	>20	<b>0</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>5</b>	7	6
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	0
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.0</b>	7.9	9.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.8</b>	22.0	22.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	2	2
Boron	ppm	ASTM D5185m	2.5	<b>23</b>	28	20
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m	0.7	<b>41</b>	40	44
Manganese	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	256	<b>497</b>	434	510
Calcium	ppm	ASTM D5185m	2057	<b>1701</b>	1443	1621
Phosphorus	ppm	ASTM D5185m	935	<b>939</b>	853	853
Zinc	ppm	ASTM D5185m	1223	<b>1065</b>	982	1062
Sulfur	ppm	ASTM D5185m	4079	<b>3388</b>	3016	3082
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.3</b>	19.9	20.5
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>8.7</b>	9.4	8.8
Visc @ 100°C	cSt	ASTM D445	15.0	<b>12.5</b>	12.3	12.5

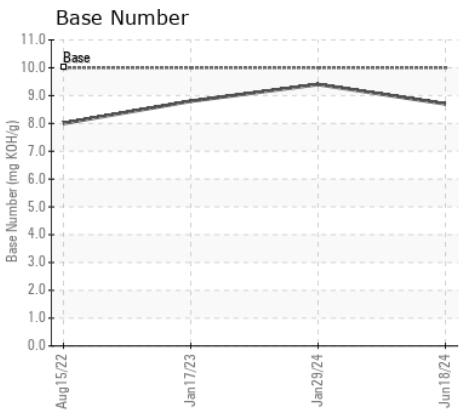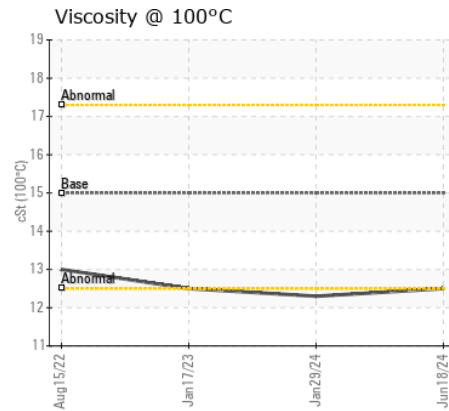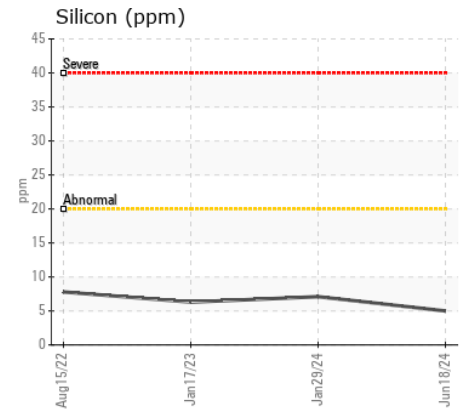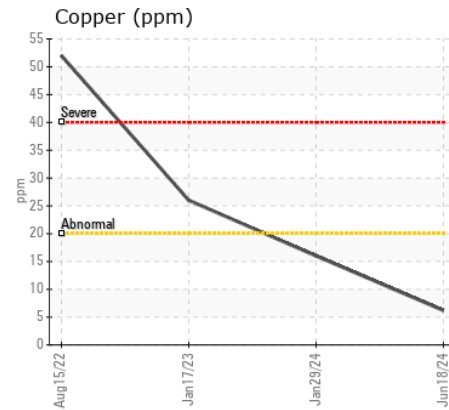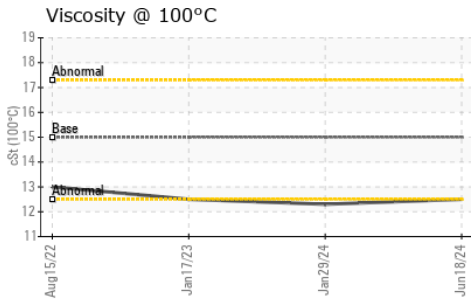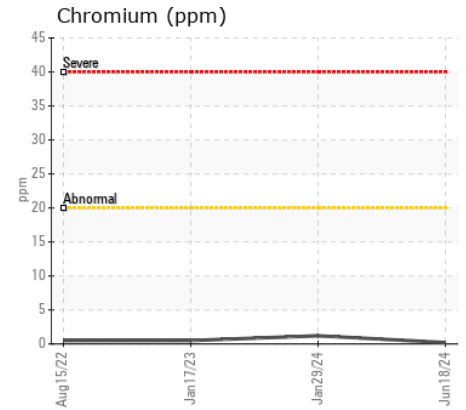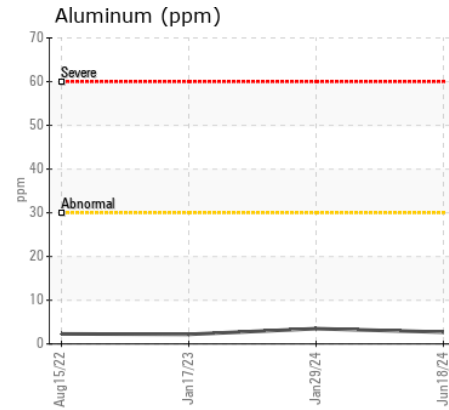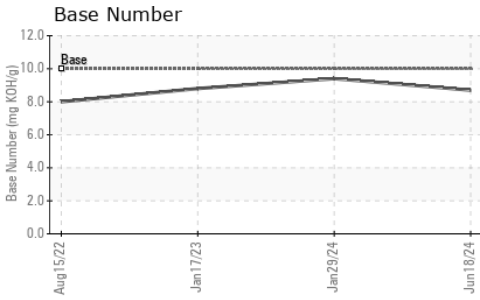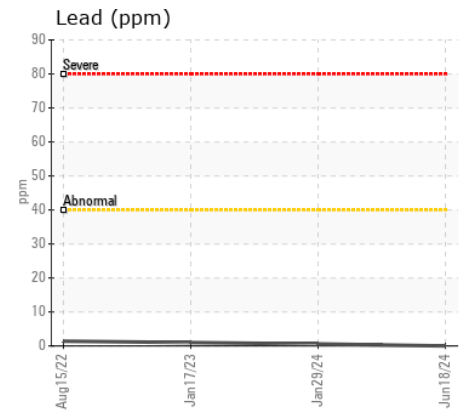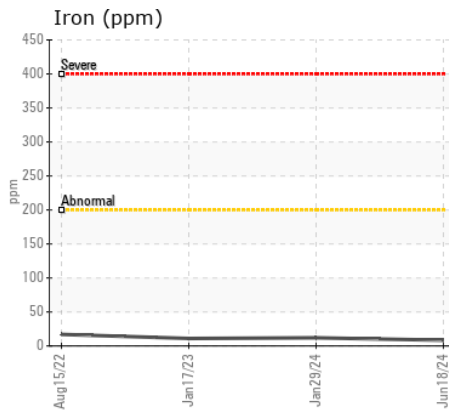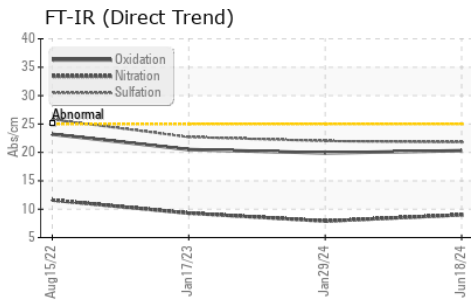

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP449863 **Received** : 16 Jul 2024  
**Lab Number** : 06237498 **Tested** : 17 Jul 2024  
**Unique Number** : 11126332 **Diagnosed** : 17 Jul 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC**  
 8418 PALM RIVER ROAD  
 TAMPA, FL  
 US 33619  
 Contact: JOHN FARDELLA  
 john.fardella@altg.com  
 T: (813)630-0077  
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)