



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 410E 1DW410EBCNF715190
Component
Front Differential
Fluid
JOHN DEERE HY-GARD HYD/TRANS (14 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0221047	JR0214171	JR0201087
Sample Date		Client Info		12 Jul 2024	03 May 2024	05 Feb 2024
Machine Age	hrs	Client Info		5482	5001	4375
Oil Age	hrs	Client Info		4856	626	2654
Filter Age	hrs	Client Info		481	626	702
Oil Changed		Client Info		Not Changed	Not Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		16	15	15
Iron	ppm	ASTM D5185m	>500	61	13	25
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>25	3	<1	2
Lead	ppm	ASTM D5185m	>25	9	8	19
Copper	ppm	ASTM D5185m	>100	15	13	43
Tin	ppm	ASTM D5185m	>10	<1	3	4
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	26	3	3
Potassium	ppm	ASTM D5185m	>20	1	1	1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	3	1
Boron	ppm	ASTM D5185m	6	2	0	<1
Barium	ppm	ASTM D5185m	0	0	0	4
Molybdenum	ppm	ASTM D5185m	0	<1	<1	0
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m	145	92	97	98
Calcium	ppm	ASTM D5185m	3570	3337	3439	3300
Phosphorus	ppm	ASTM D5185m	1290	881	1036	901
Zinc	ppm	ASTM D5185m	1640	1219	1197	1281
Sulfur	ppm	ASTM D5185m		3832	4023	3409
Visc @ 40°C	cSt	ASTM D445	57.0	50.3	51.5	50.1

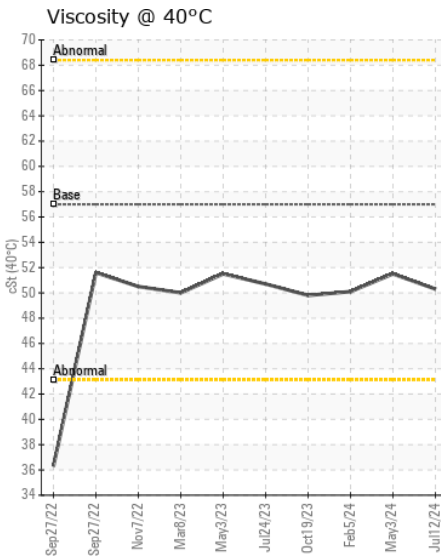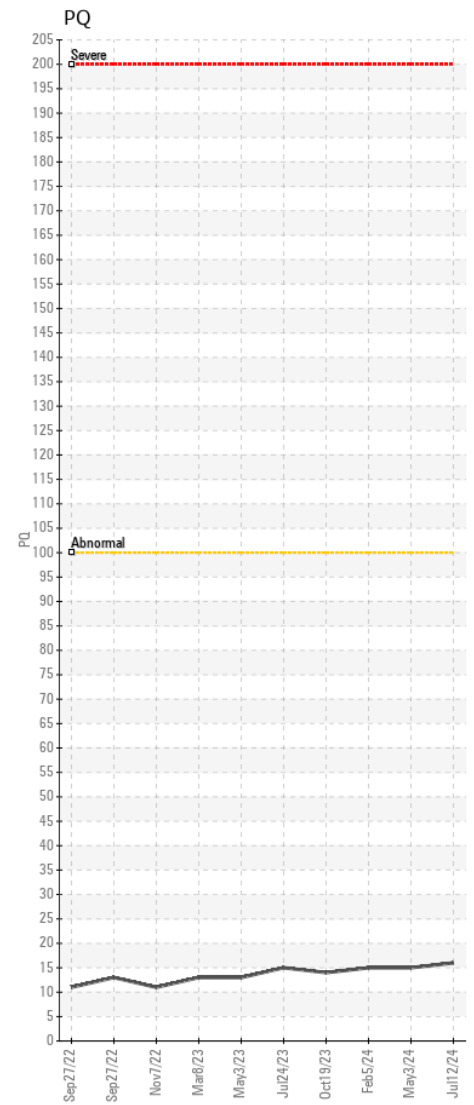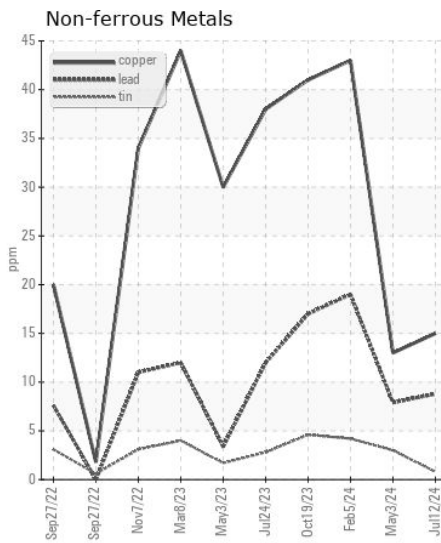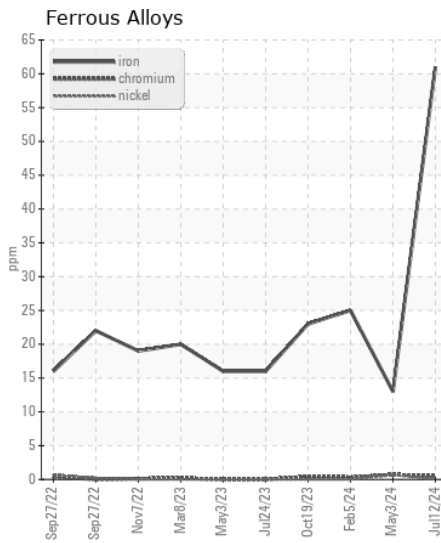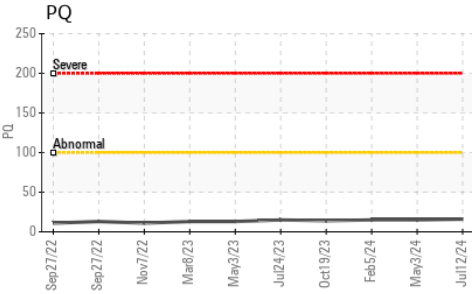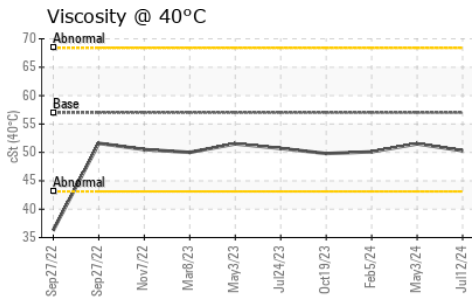

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0221047 **Received** : 16 Jul 2024
Lab Number : 06238042 **Tested** : 17 Jul 2024
Unique Number : 11126876 **Diagnosed** : 17 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - NEW BERN
 3816 MARTIN LUTHER KING BLVD
 NEW BERN, NC
 US 28562
 Contact: NEW BERN SHOP

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

nick.etherdridge@jamesriverequipment.com; canastasio@wearcheckusa.com
 T:
 F: