



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 850L 1T0850LXERF465443**  
 Component  
**Right Outer Final Drive**  
 Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

### WEAR

All component wear rates are normal.








### CONTAMINATION

There is a light concentration of water present in the oil.

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0221102</b>	---	---
Sample Date		Client Info		<b>11 Jul 2024</b>	---	---
Machine Age	hrs	Client Info		<b>579</b>	---	---
Oil Age	hrs	Client Info		<b>579</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changd</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---
PQ		ASTM D8184	>1250	<b>135</b>	---	---
Iron	ppm	ASTM D5185m	>750	<b>104</b>	---	---
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>40	<b>3</b>	---	---
Lead	ppm	ASTM D5185m	>15	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>40	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silicon	ppm	ASTM D5185m	>75	<b>11</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water	%	ASTM D6304	>0.075	<b>▲ 0.263</b>	---	---
ppm Water	ppm	ASTM D6304	>750	<b>▲ 2630</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.075	<b>▲ 0.2%</b>	---	---
Sodium	ppm	ASTM D5185m	>51	<b>0</b>	---	---
Boron	ppm	ASTM D5185m	6	<b>2</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	145	<b>105</b>	---	---
Calcium	ppm	ASTM D5185m	3570	<b>3624</b>	---	---
Phosphorus	ppm	ASTM D5185m	1290	<b>937</b>	---	---
Zinc	ppm	ASTM D5185m	1640	<b>1296</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3582</b>	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>53.9</b>	---	---

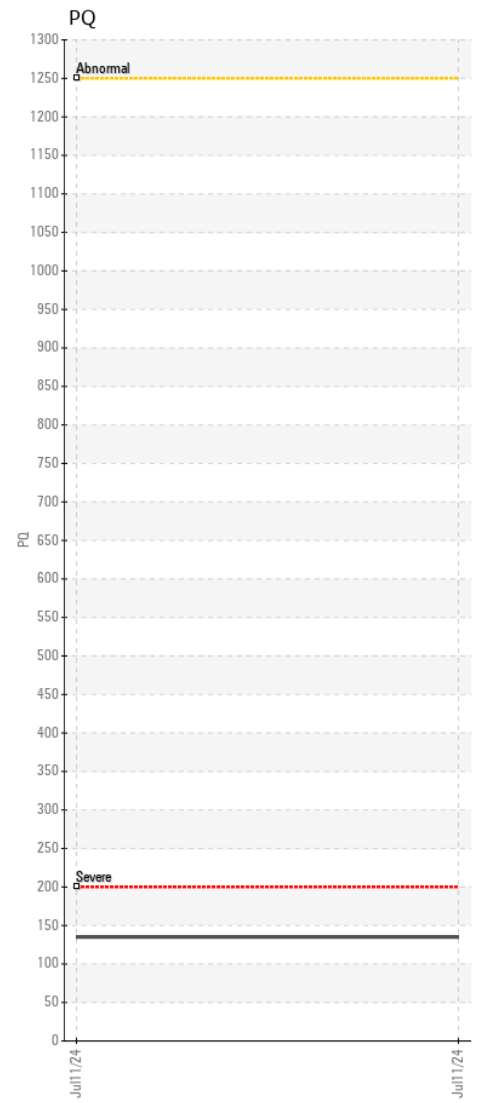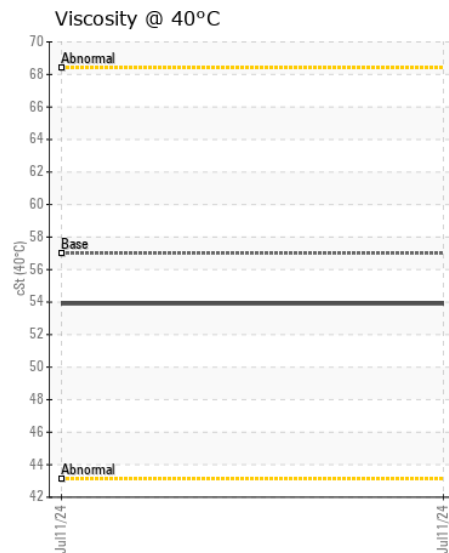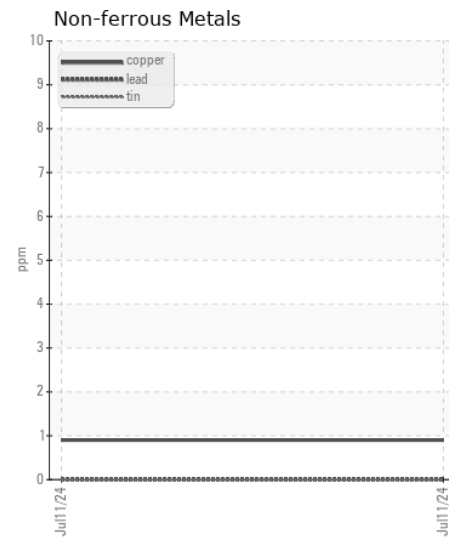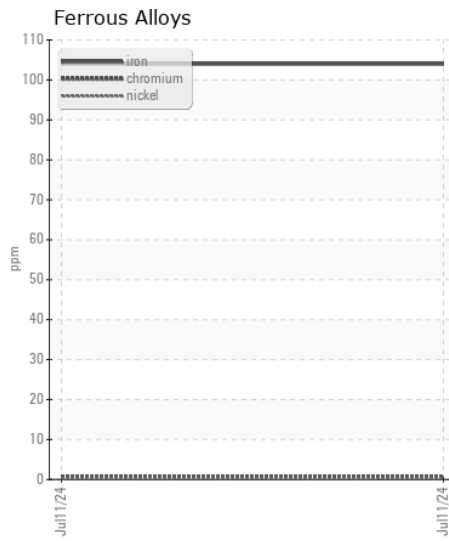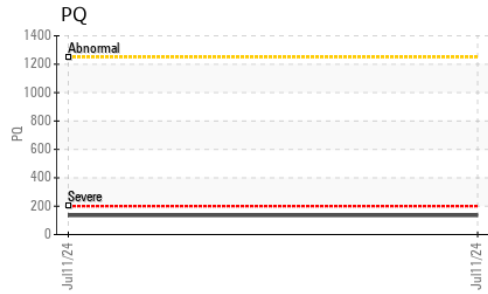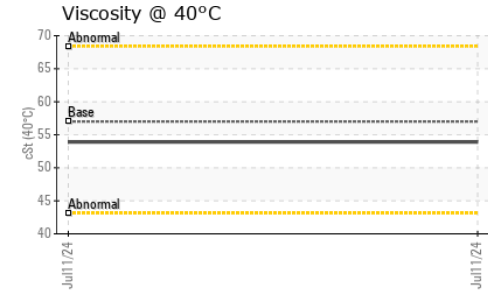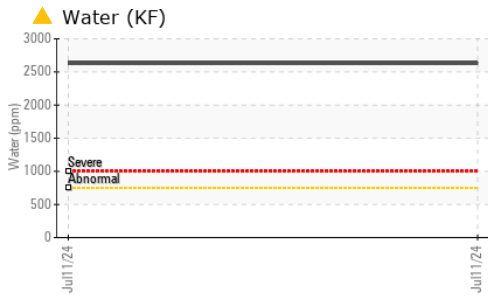

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0221102 **Received** : 16 Jul 2024  
**Lab Number** : 06238047 **Tested** : 17 Jul 2024  
**Unique Number** : 11126881 **Diagnosed** : 18 Jul 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: KF, PQ )

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005

Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)