



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 844P 06735
 Component
Rear Axle
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MT0006144	---	---
Sample Date		Client Info		10 Jul 2024	---	---
Machine Age	hrs	Client Info		2566	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		130	---	---
Iron	ppm	ASTM D5185m	>750	462	---	---
Chromium	ppm	ASTM D5185m	>11	3	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>21	3	---	---
Lead	ppm	ASTM D5185m	>49	6	---	---
Copper	ppm	ASTM D5185m	>101	38	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	9	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	---	---
Boron	ppm	ASTM D5185m	6	13	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	2	---	---
Manganese	ppm	ASTM D5185m		9	---	---
Magnesium	ppm	ASTM D5185m	145	83	---	---
Calcium	ppm	ASTM D5185m	3570	3032	---	---
Phosphorus	ppm	ASTM D5185m	1290	862	---	---
Zinc	ppm	ASTM D5185m	1640	1216	---	---
Sulfur	ppm	ASTM D5185m		3119	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	54.4	---	---

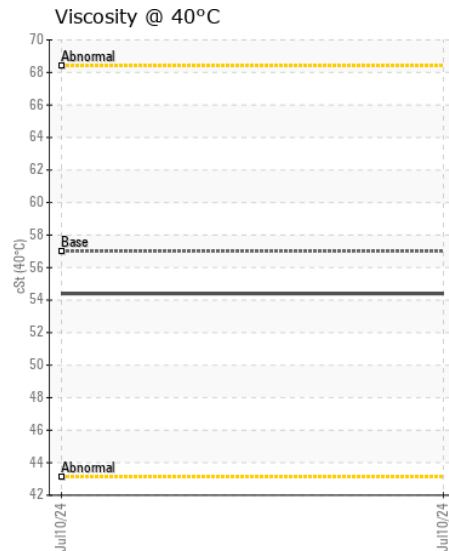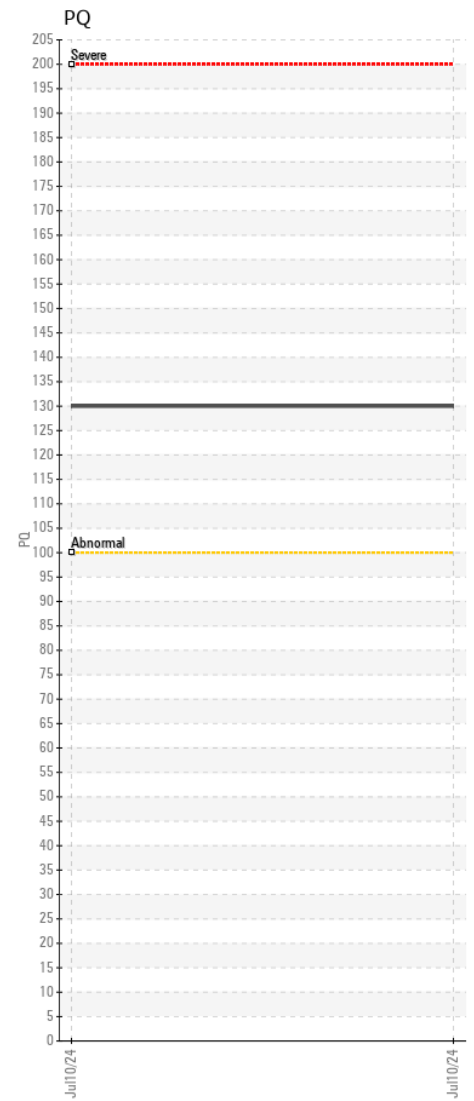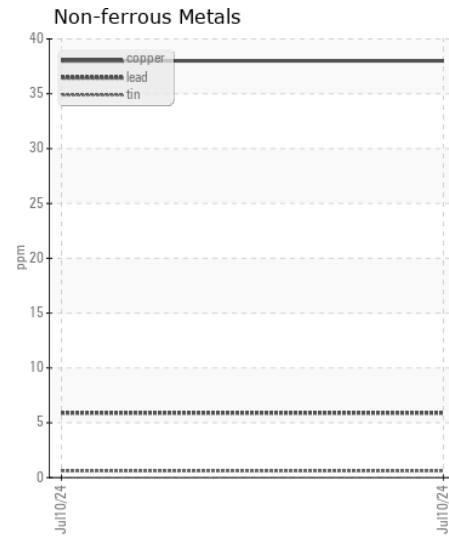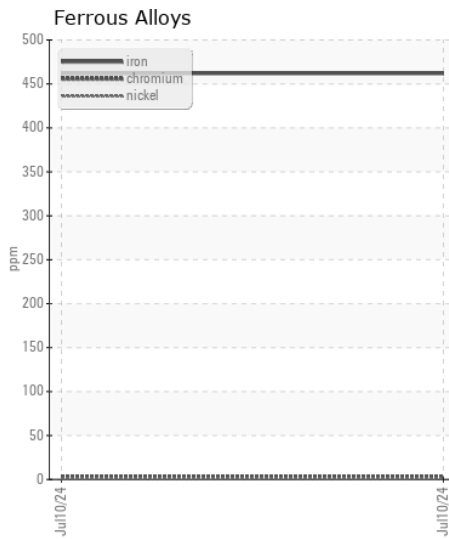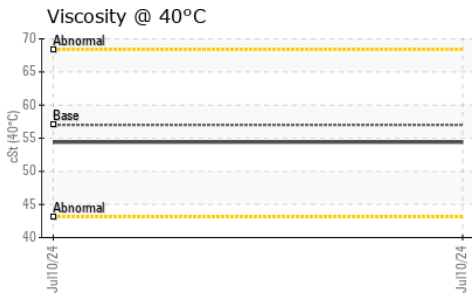

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MT0006144
Lab Number : 06238073
Unique Number : 11126907
Test Package : CONST (Additional Tests: PQ)

Received : 16 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 17 Jul 2024 - Wes Davis

MURPHY TRACTOR - CAMBRIDGE
 60611 HULSE DRIVE
 CAMBRIDGE, OH
 US 43725
 Contact: DUSTIN DAILEY
 DDAILEY@MURPHYTRACTOR.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (740)439-2325