



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Mobile Fleet
 Machine Id
6457 6457
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0937867	WC0939418	WC0918671
Sample Date		Client Info		15 Jul 2024	22 May 2024	27 Mar 2024
Machine Age	hrs	Client Info		4400	4174	3860
Oil Age	hrs	Client Info		234	315	511
Filter Age	hrs	Client Info		234	315	511
Oil Changed		Client Info		Not Changd	Changed	Changed
Filter Changed		Client Info		Not Changd	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>65	3	5	8
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>3	<1	<1	<1
Titanium	ppm	ASTM D5185m	>5	<1	0	<1
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>35	3	5	6
Lead	ppm	ASTM D5185m	>10	<1	<1	0
Copper	ppm	ASTM D5185m	>180	2	4	12
Tin	ppm	ASTM D5185m	>8	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>15	6	5	6
Potassium	ppm	ASTM D5185m	>20	3	6	7
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	5.0	6.4	6.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.8	21.6	22.1
Particles >4µm		ASTM D7647	>20000	2749	1749	4489
Particles >6µm		ASTM D7647	>5000	1498	953	2445
Particles >14µm		ASTM D7647	>640	255	162	416
Particles >21µm		ASTM D7647	>160	86	55	140
Particles >38µm		ASTM D7647	>40	13	8	22
Particles >71µm		ASTM D7647	>10	1	1	2
Oil Cleanliness		ISO 4406 (c)	>21/19/16	19/18/15	18/17/15	19/18/16
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	3	<1
Boron	ppm	ASTM D5185m	250	64	57	54
Barium	ppm	ASTM D5185m	10	<1	0	0
Molybdenum	ppm	ASTM D5185m	100	44	48	48
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	468	527	512
Calcium	ppm	ASTM D5185m	3000	1557	1662	1741
Phosphorus	ppm	ASTM D5185m	1150	723	775	689
Zinc	ppm	ASTM D5185m	1350	873	912	931
Sulfur	ppm	ASTM D5185m	4250	2480	2814	2507
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.7	19.2	20.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	10.0	9.6	9.6
Visc @ 100°C	cSt	ASTM D445	10.9	11.2	11.2	11.3

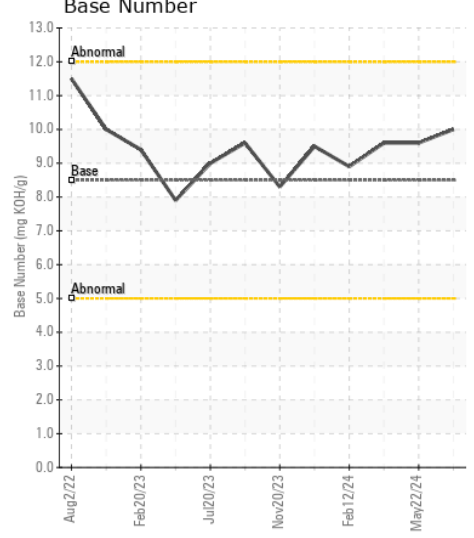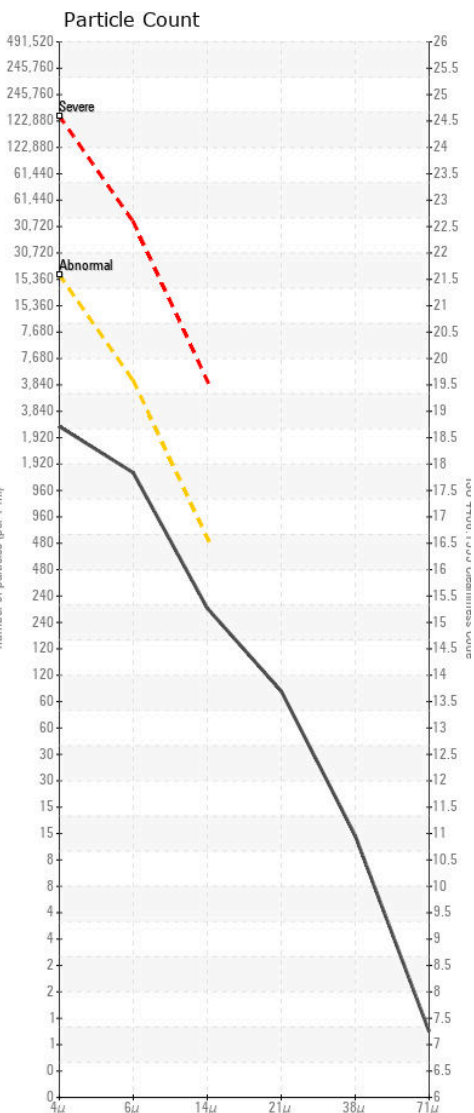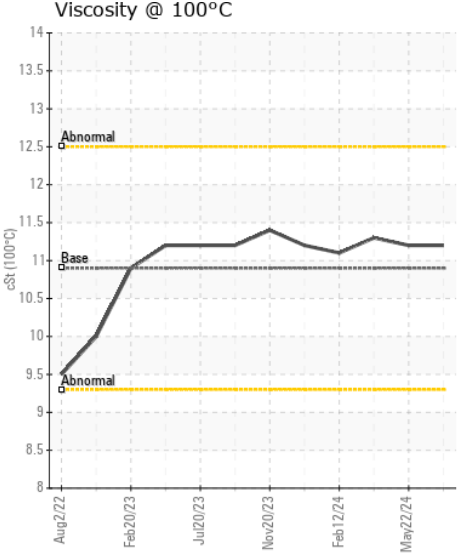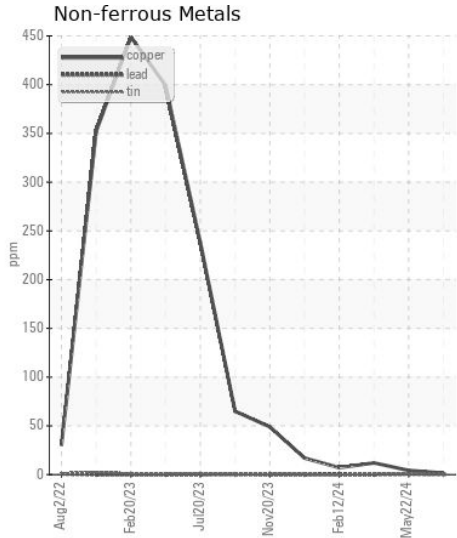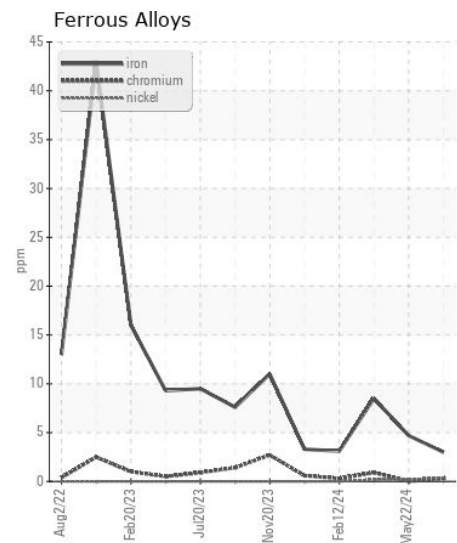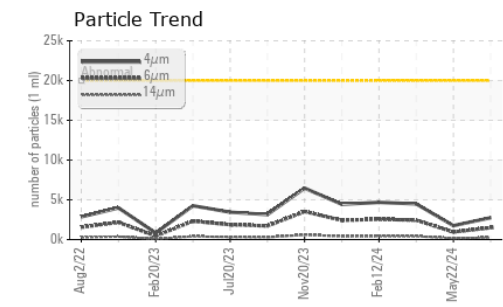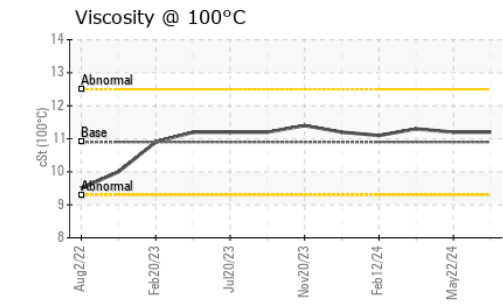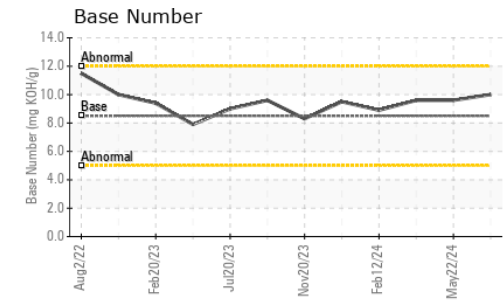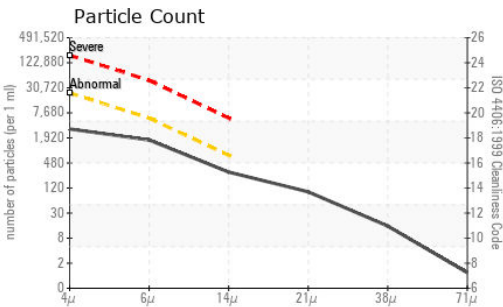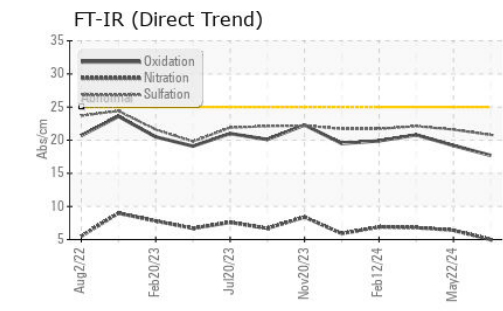

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0937867
Lab Number : 06239015
Unique Number : 11127849
Test Package : CONST (Additional Tests: PrtCount, TBN)

CAROLINA SUNROCK
 PO BOX 25
 BUTNER, NC
 US 27509
 Contact: Leigh Dennis
 rdennis@thesunrockgroup.com
 T: (919)575-4505
 F: (919)575-0162

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)