



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Area
Mobile Fleet
 Machine Id
8104 8104
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER 10W30 (10 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0956011	WC0947769	WC0918971
Sample Date		Client Info		15 Jul 2024	12 Jun 2024	01 May 2024
Machine Age	hrs	Client Info		14591	14403	14161
Oil Age	hrs	Client Info		188	573	331
Filter Age	hrs	Client Info		188	573	331
Oil Changed		Client Info		Not Chngd	Changed	Not Chngd
Filter Changed		Client Info		Not Chngd	Changed	Not Chngd
Sample Status				ATTENTION	ATTENTION	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	4	6	4
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	3	3	3
Lead	ppm	ASTM D5185m	>40	<1	<1	2
Copper	ppm	ASTM D5185m	>330	1	1	1
Tin	ppm	ASTM D5185m	>15	<1	<1	2
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is a moderate amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>25	5	6	5
Potassium	ppm	ASTM D5185m	>20	3	3	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	6.7	7.6	7.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.4	21.7	21.3
Particles >4µm		ASTM D7647	>20000	13328	12301	18034
Particles >6µm		ASTM D7647	>5000	7260	6701	9824
Particles >14µm		ASTM D7647	>640	1236	1140	1672
Particles >21µm		ASTM D7647	>160	416	384	563
Particles >38µm		ASTM D7647	>40	64	59	87
Particles >71µm		ASTM D7647	>10	7	6	9
Oil Cleanliness		ISO 4406 (c)	>21/19/16	21/20/17	21/20/17	21/20/18
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	<1	2
Boron	ppm	ASTM D5185m		40	32	34
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		45	49	42
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		490	494	527
Calcium	ppm	ASTM D5185m		1563	1568	1720
Phosphorus	ppm	ASTM D5185m		752	687	824
Zinc	ppm	ASTM D5185m		901	909	958
Sulfur	ppm	ASTM D5185m		2600	2670	3119
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.9	19.6	19.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	9.4	8.9	9.2
Visc @ 100°C	cSt	ASTM D445	11.9	11.8	12.1	11.5

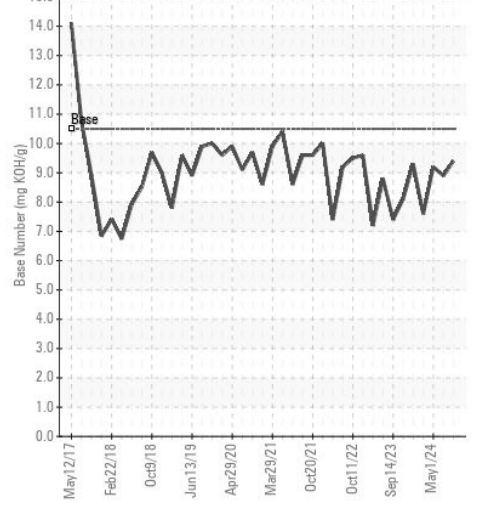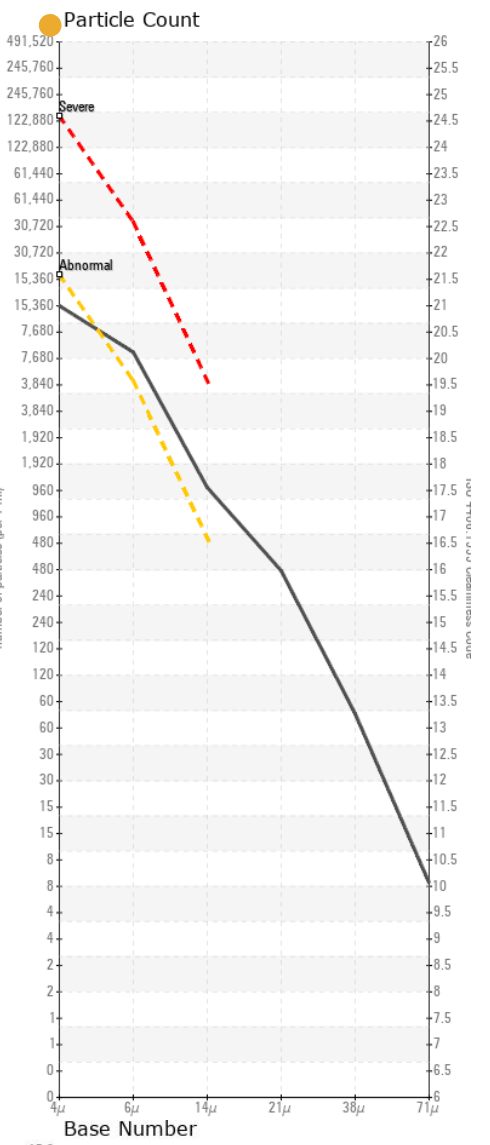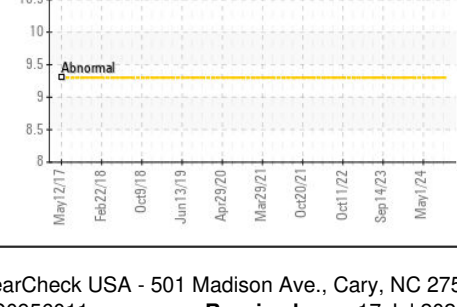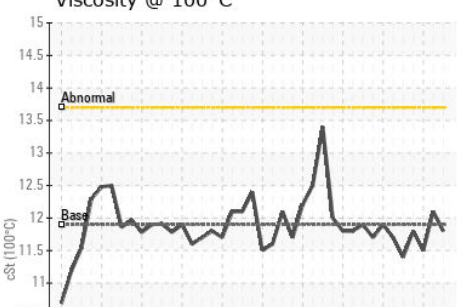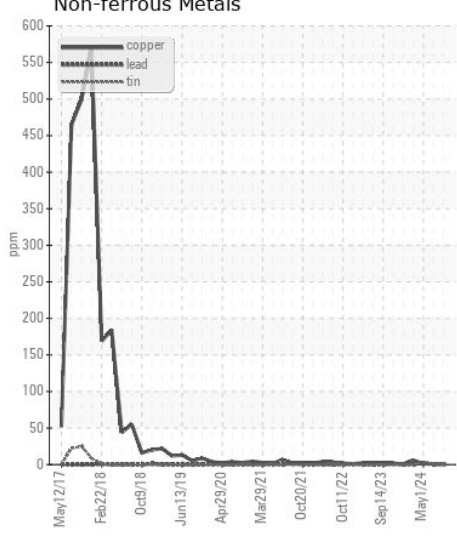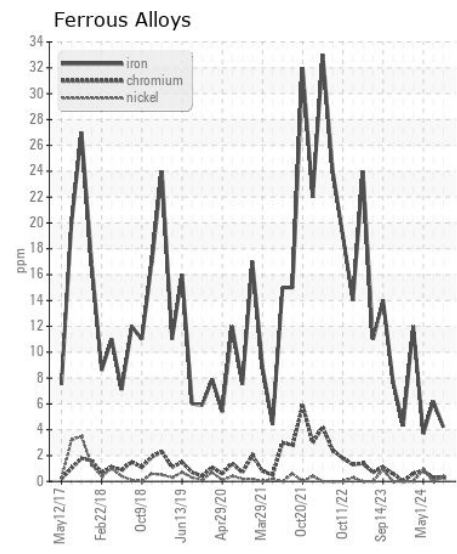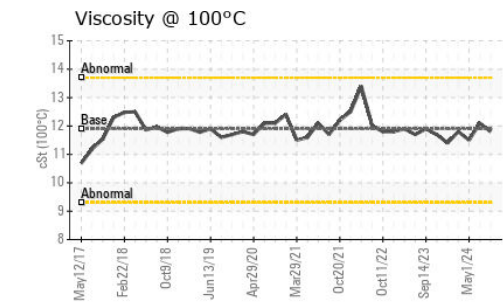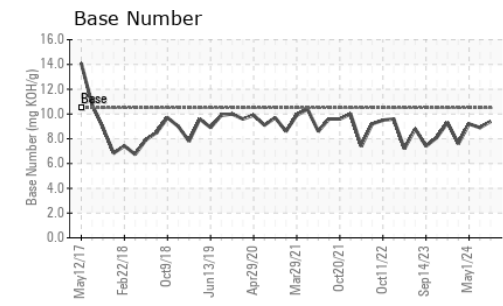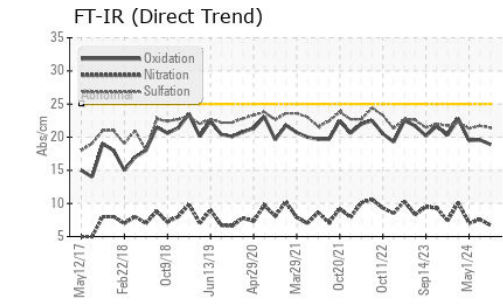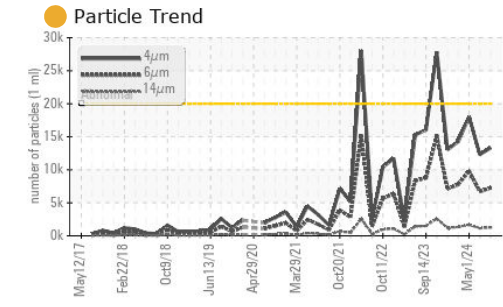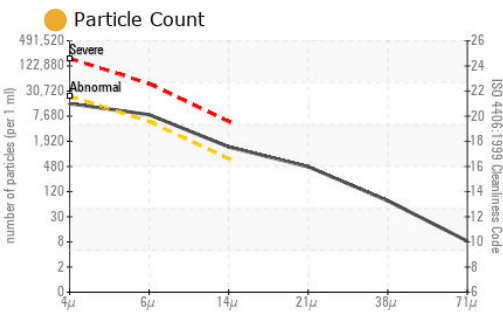

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0956011 **Received** : 17 Jul 2024
Lab Number : 06239016 **Tested** : 18 Jul 2024
Unique Number : 11127850 **Diagnosed** : 18 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: PrtCount, TBN)

CAROLINA SUNROCK
 PO BOX 25
 BUTNER, NC
 US 27509
 Contact: Leigh Dennis
 rdennis@thesunrockgroup.com
 T: (919)575-4505
 F: (919)575-0162

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)