



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 4 - Fairmont [RO# 153165]
Machine Id
JOHN DEERE 624L 1DW624LZTKF694098
Component
Hydraulic System
Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0051539	LEC0038874	LEC0028617
Sample Date		Client Info		10 Jul 2024	09 Feb 2023	09 May 2022
Machine Age	hrs	Client Info		5785	3998	3354
Oil Age	hrs	Client Info		5785	3998	3354
Filter Age	hrs	Client Info		5785	3998	1380
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	21	12	19
Iron	ppm	ASTM D5185m	>71	10	8	6
Chromium	ppm	ASTM D5185m	>11	10	6	5
Nickel	ppm	ASTM D5185m	>6	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>11	<1	0	<1
Lead	ppm	ASTM D5185m	>13	0	<1	<1
Copper	ppm	ASTM D5185m	>21	<1	<1	<1
Tin	ppm	ASTM D5185m	>5	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>24	3	2	2
Potassium	ppm	ASTM D5185m	>20	3	4	2
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	6267	7714	8419
Particles >6µm		ASTM D7647	>5000	131	137	109
Particles >14µm		ASTM D7647	>640	15	12	16
Particles >21µm		ASTM D7647	>160	3	3	5
Particles >38µm		ASTM D7647	>40	0	1	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/19/16	20/14/11	20/14/11	20/14/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	3	<1	2
Boron	ppm	ASTM D5185m	6	0	0	1
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	<1
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	145	3	4	2
Calcium	ppm	ASTM D5185m	3570	82	88	95
Phosphorus	ppm	ASTM D5185m	1290	572	555	570
Zinc	ppm	ASTM D5185m	1640	707	755	766
Sulfur	ppm	ASTM D5185m		1751	1596	1473
Acid Number (AN)	mg KOH/g	ASTM D8045	1.8	0.51	0.43	0.47
Visc @ 40°C	cSt	ASTM D445	57.0	54.4	55.4	56.0

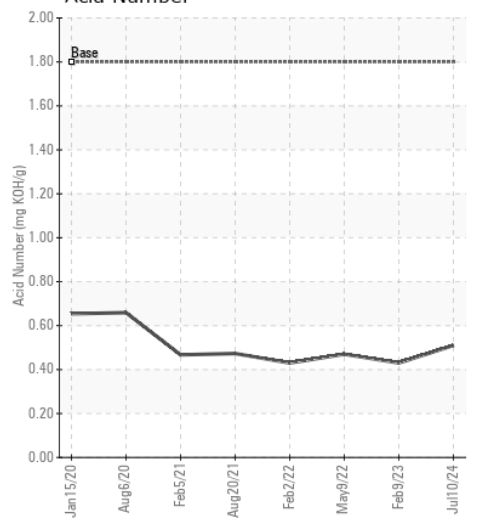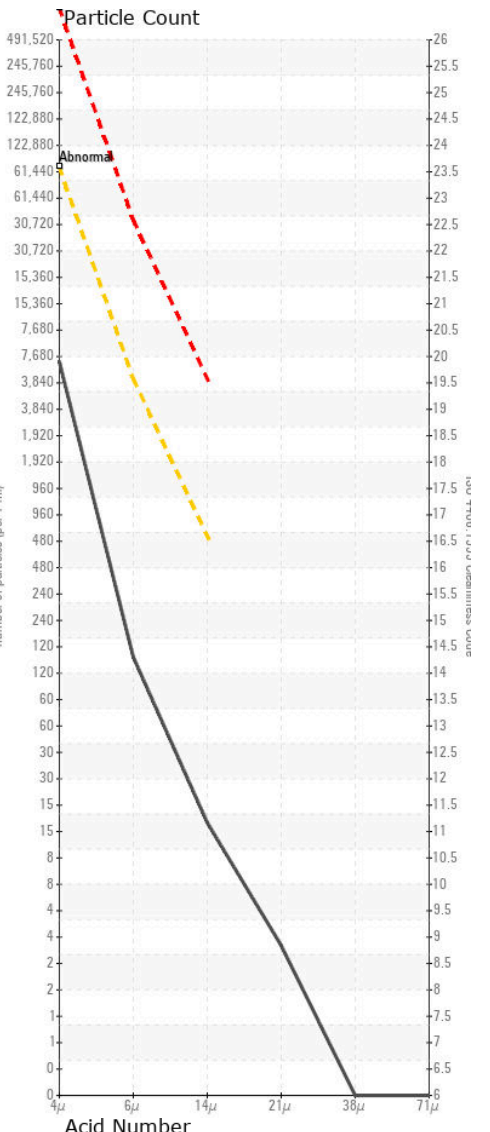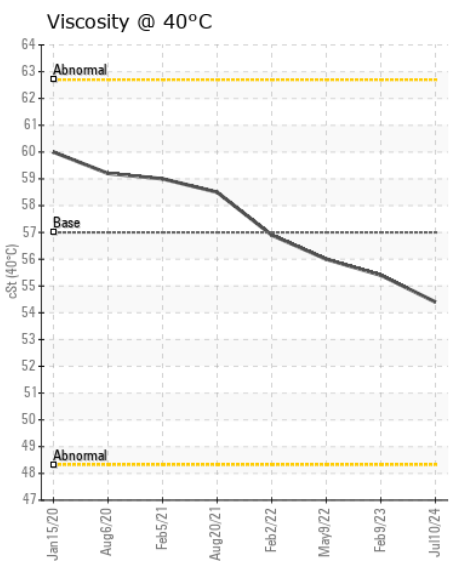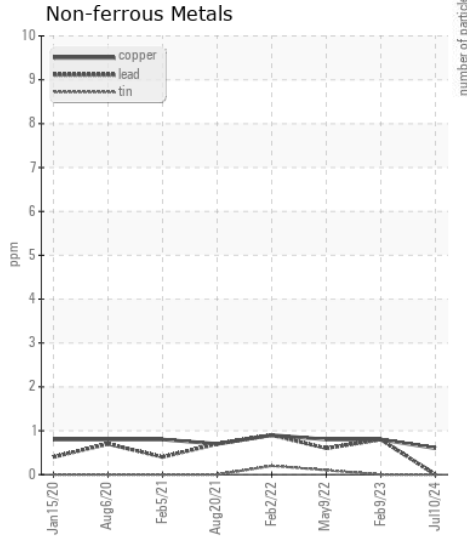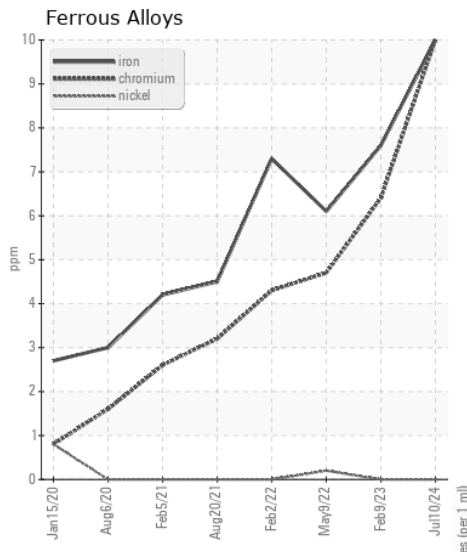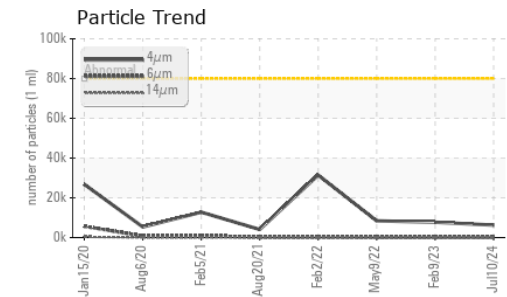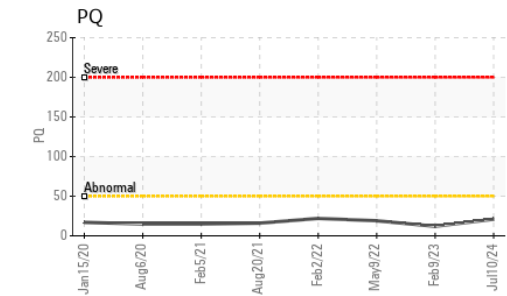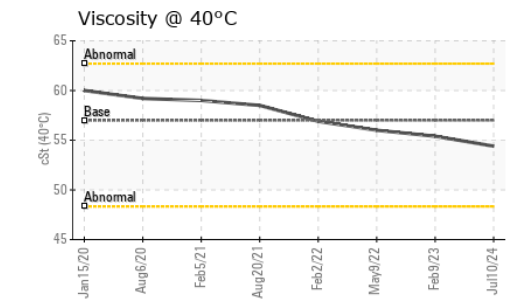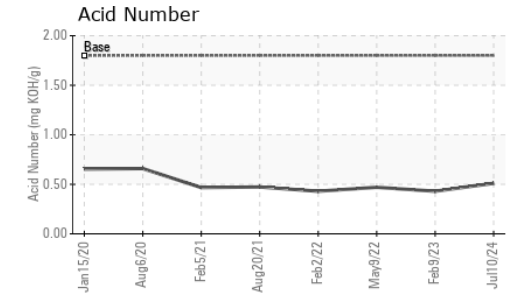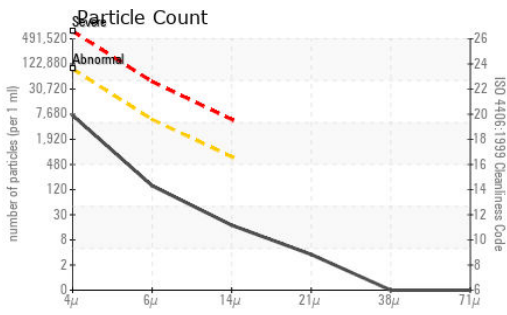

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0051539 **Received** : 17 Jul 2024
Lab Number : 06239076 **Tested** : 18 Jul 2024
Unique Number : 11127910 **Diagnosed** : 19 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (740)373-5570