



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
FLEET
Machine Id

Perdue farms (S/N 603203)

Component
Diesel Engine

Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0123619	PCA0081806	---
Sample Date		Client Info		19 Jun 2024	09 Mar 2023	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	51	76	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	1	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>2	<1	0	---
Aluminum	ppm	ASTM D5185m	>25	4	27	---
Lead	ppm	ASTM D5185m	>40	<1	3	---
Copper	ppm	ASTM D5185m	>330	34	203	---
Tin	ppm	ASTM D5185m	>15	0	5	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	8	55	---
Potassium	ppm	ASTM D5185m	>20	6	63	---
Fuel	%	ASTM D3524	>6.0	<1.0	0.5	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.6	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	13.3	10.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.6	22.9	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	5	---
Boron	ppm	ASTM D5185m		<1	162	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		64	109	---
Manganese	ppm	ASTM D5185m		1	5	---
Magnesium	ppm	ASTM D5185m		954	667	---
Calcium	ppm	ASTM D5185m		1261	1428	---
Phosphorus	ppm	ASTM D5185m		960	610	---
Zinc	ppm	ASTM D5185m		1241	819	---
Sulfur	ppm	ASTM D5185m		2826	2413	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.2	21.9	---
Base Number (BN)	mg KOH/g	ASTM D2896		4.7	5.4	---
Visc @ 100°C	cSt	ASTM D445		11.3	9.5	---


FT-IR (Direct Trend)

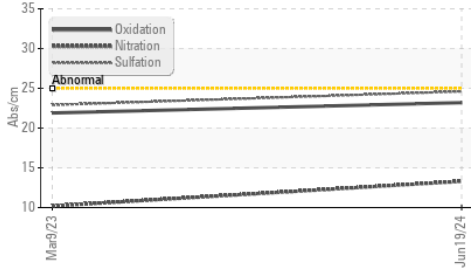


Base Number

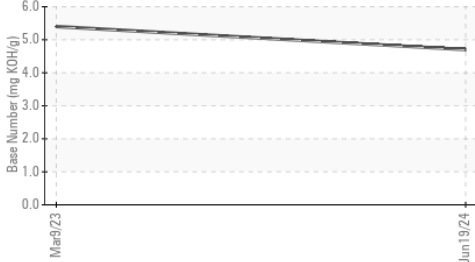


Fuel Dilution

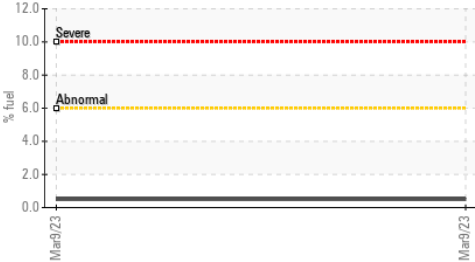


Viscosity @ 100°C

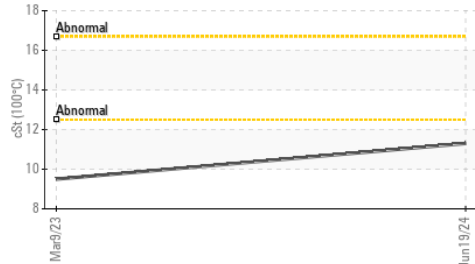


Ferrous Alloys

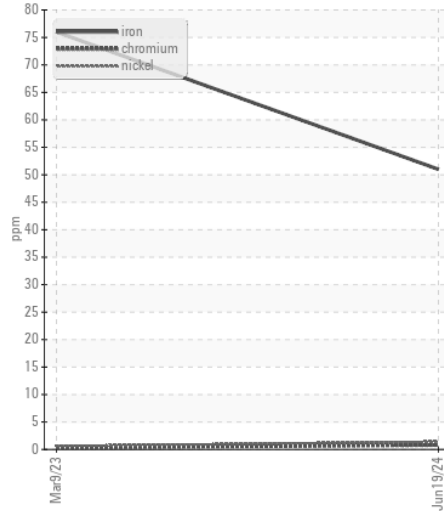


Non-ferrous Metals

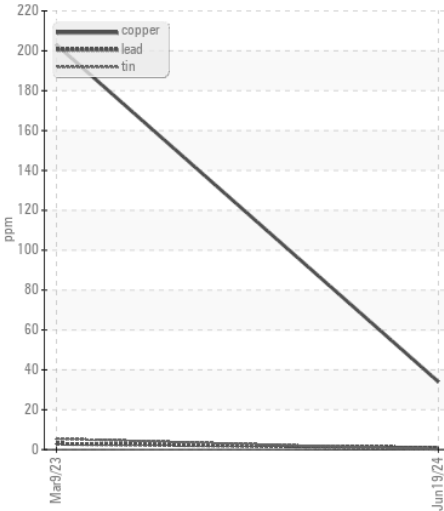

Viscosity @ 100°C

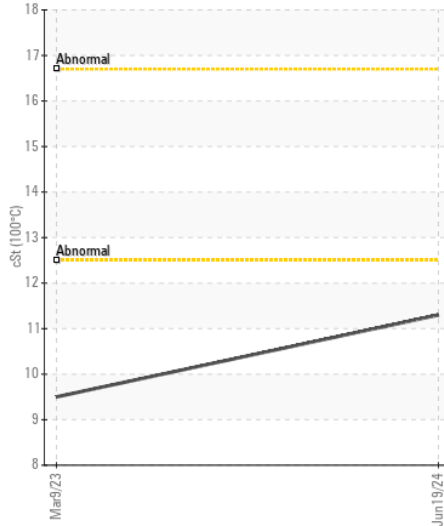

Base Number

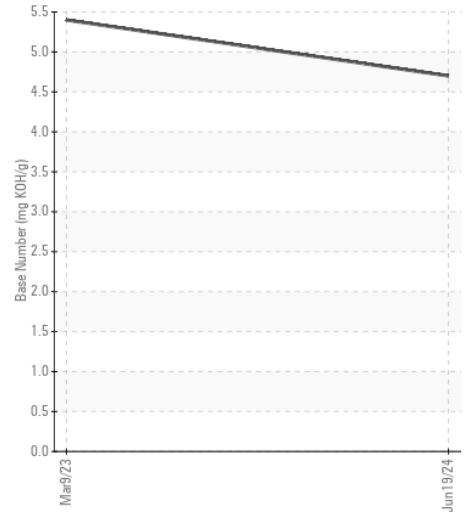

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0123619 **Received** : 18 Jul 2024
Lab Number : 06240123 **Tested** : 19 Jul 2024
Unique Number : 11128957 **Diagnosed** : 19 Jul 2024 - Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution)

PERDUE FARMS - DILLON
 2047 HWY 9 WEST
 DILLON, SC
 US 29536

Contact: KEVIN HOOKS
 kevin.hooks@perdue.com
 T: (843)841-8069
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)