



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JCB 525-60 3326768
 Component
Diesel Engine
 Fluid
JCB 5W40 (9 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JCB005334	---	---
Sample Date		Client Info		16 Jul 2024	---	---
Machine Age	hrs	Client Info		974	---	---
Oil Age	hrs	Client Info		122	---	---
Filter Age	hrs	Client Info		122	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>125	16	---	---
Chromium	ppm	ASTM D5185m	>5	4	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>25	3	---	---
Lead	ppm	ASTM D5185m	>15	<1	---	---
Copper	ppm	ASTM D5185m	>125	4	---	---
Tin	ppm	ASTM D5185m	>4	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	8	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		107	---	---
Barium	ppm	ASTM D5185m		1	---	---
Molybdenum	ppm	ASTM D5185m		8	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		108	---	---
Calcium	ppm	ASTM D5185m		2450	---	---
Phosphorus	ppm	ASTM D5185m		1063	---	---
Zinc	ppm	ASTM D5185m		1290	---	---
Sulfur	ppm	ASTM D5185m		4530	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.0	---	---
Visc @ 40°C	cSt	ASTM D445		89.6	---	---
Visc @ 100°C	cSt	ASTM D445		14.1	---	---
Viscosity Index (VI)	Scale	ASTM D2270		162	---	---

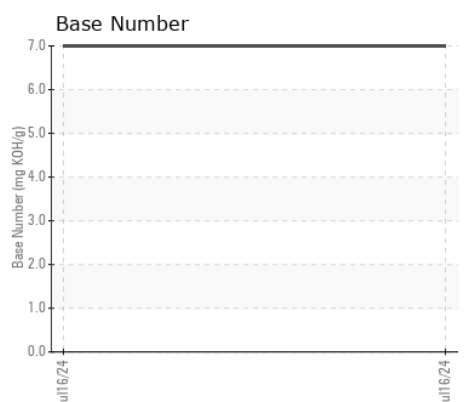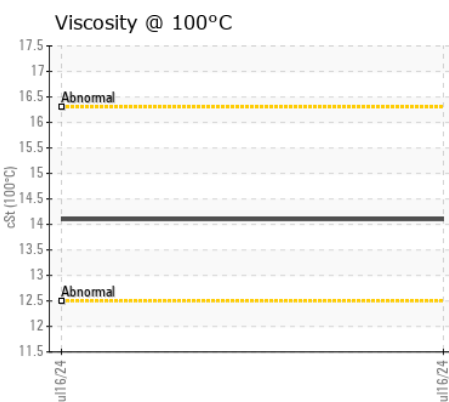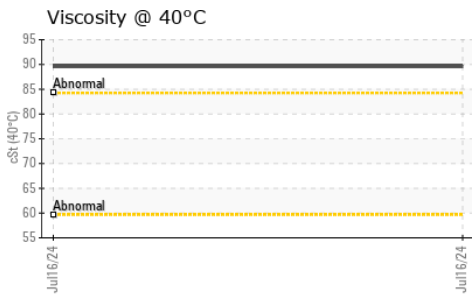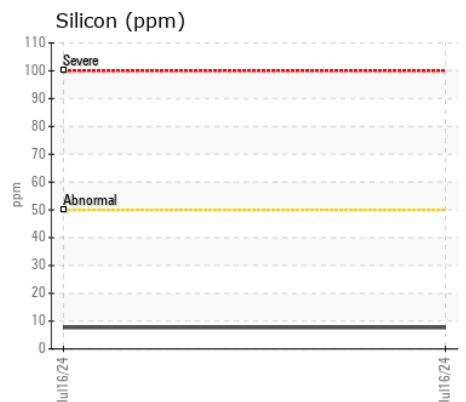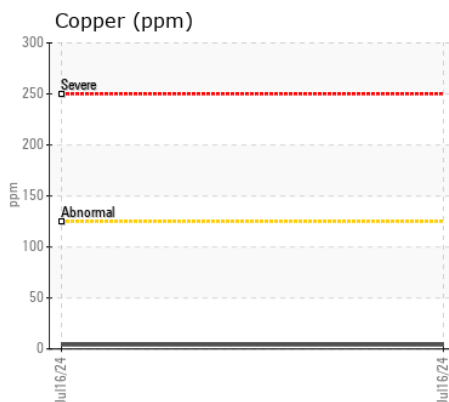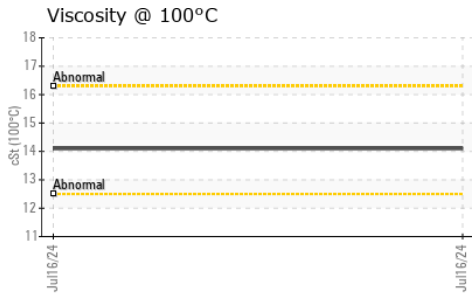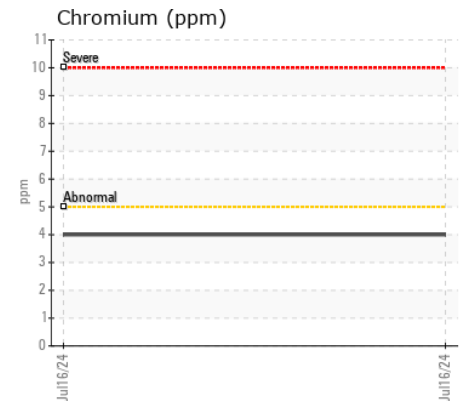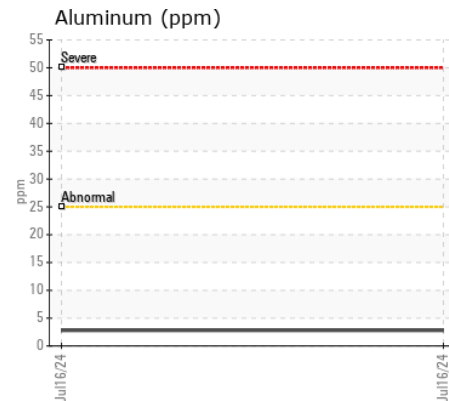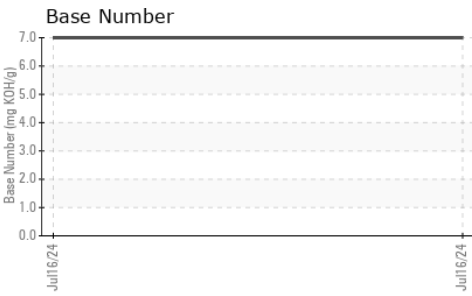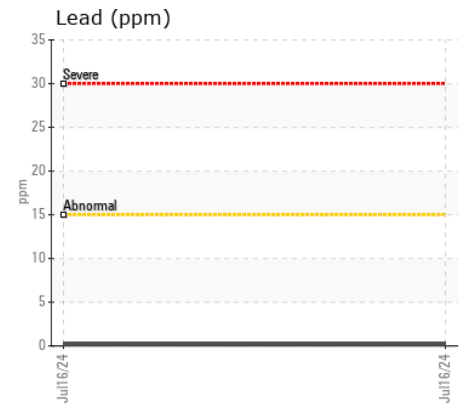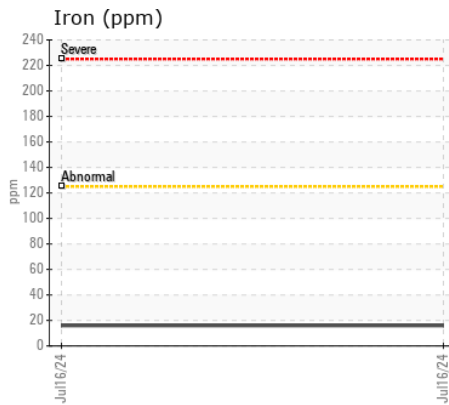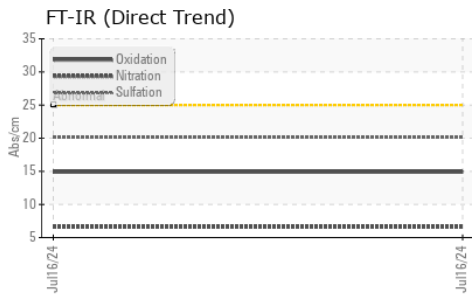

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JCB005334 **Received** : 18 Jul 2024
Lab Number : 06240159 **Tested** : 19 Jul 2024
Unique Number : 11128993 **Diagnosed** : 19 Jul 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, TBN, VI)

PALMER EQUIPMENT
 708 N BYPASS W
 WASHINGTON, GA
 US 30673
 Contact: JAKE SOPER
 jsoper@palmerequipment.org
 T: (706)401-5143
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)