



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 30210

Component
Left Final Drive

Fluid
CHEVRON DELO GEAR ESI OIL 80W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0950525	WC0857114	WC0733798
Sample Date		Client Info		16 Jul 2024	19 Dec 2023	05 Dec 2022
Machine Age	hrs	Client Info		4545	4114	3591
Oil Age	hrs	Client Info		250	2000	0
Filter Age	hrs	Client Info		250	2000	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	SEVERE	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>750	1	▲ 5136	▲ 2831
Chromium	ppm	ASTM D5185m	>9	<1	▲ 47	▲ 25
Nickel	ppm	ASTM D5185m	>10	0	▲ 12	3
Titanium	ppm	ASTM D5185m		0	11	7
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	1	● 166	● 115
Lead	ppm	ASTM D5185m	>15	0	<1	0
Copper	ppm	ASTM D5185m	>40	<1	15	7
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	2	▲ 774	▲ 518
Potassium	ppm	ASTM D5185m	>20	1	36	24
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	17	10
Boron	ppm	ASTM D5185m	15	66	263	110
Barium	ppm	ASTM D5185m	0	0	2	0
Molybdenum	ppm	ASTM D5185m	0	11	8	8
Manganese	ppm	ASTM D5185m		0	33	20
Magnesium	ppm	ASTM D5185m	0	48	35	25
Calcium	ppm	ASTM D5185m	5	135	96	94
Phosphorus	ppm	ASTM D5185m	600	2144	2090	2286
Zinc	ppm	ASTM D5185m	0	123	178	116
Sulfur	ppm	ASTM D5185m	22000	14971	18534	25820
Visc @ 40°C	cSt	ASTM D445	140	111	150	170

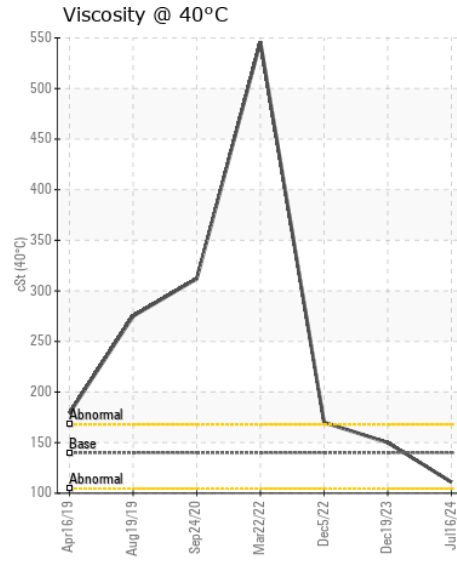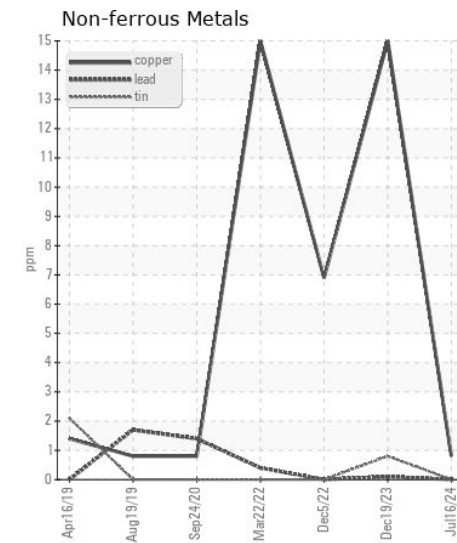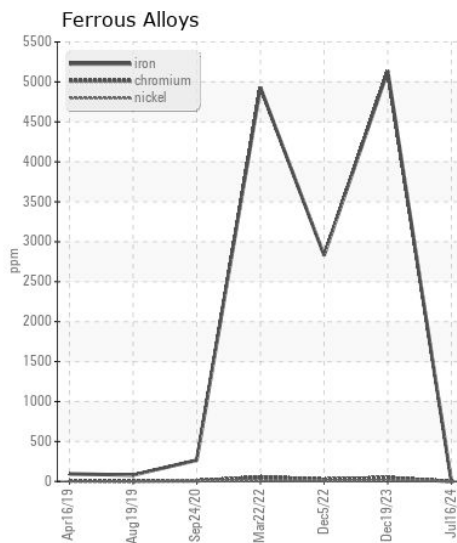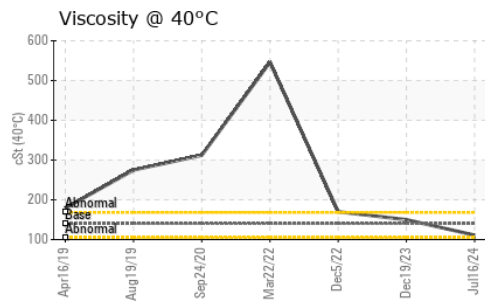

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0950525 **Received** : 18 Jul 2024
Lab Number : 06240727 **Tested** : 19 Jul 2024
Unique Number : 11129561 **Diagnosed** : 20 Jul 2024 - Don Baldrige
Test Package : CONST

SULLIVAN EASTERN INC
 2860 C SLATER RD
 MORRISVILLE, NC
 US 27560
 Contact: SCOTT SULLIVAN
 ssullivan@sullivan-eastern.com
 T: (919)484-8993
 F: (919)484-2136

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)