



USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Identité de la machine

5050

Composant

Différentiel Avant

Fluide

NOT GIVEN (--- GAL)

RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is SAE 75W80 Tractor TDH Fluid. Please confirm the oil type and grade, and specify the brand of the oil on your next sample. Please specify the component make and model with your next sample. Please provide more complete information on your next sample.

USURE

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

ÉTAT DU FLUIDE












The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0082333	PC0071473	PC0066070
Date d'échant.		Client Info		12 Nov 2023	15 Feb 2023	08 Nov 2022
Âge d la Machine	hrs	Client Info		2460	1587	1000
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL

Fer	ppm	ASTM D5185(m)	>500	80	60	51
Chrome	ppm	ASTM D5185(m)	>10	<1	0	0
Nickel	ppm	ASTM D5185(m)	>10	0	0	<1
Titane	ppm	ASTM D5185(m)		0	<1	<1
Argent	ppm	ASTM D5185(m)		<1	0	<1
Aluminium	ppm	ASTM D5185(m)	>25	<1	1	3
Plomb	ppm	ASTM D5185(m)	>25	30	20	16
Cuivre	ppm	ASTM D5185(m)	>100	380	300	238
Étain	ppm	ASTM D5185(m)	>10	1	1	1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	NONE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE

Silicium	ppm	ASTM D5185(m)	>75	5	5	11
Potassium	ppm	ASTM D5185(m)	>20	2	3	3
Limon	scalar	Visual*	NONE	NONE	NONE	NONE
Débris	scalar	Visual*	NONE	NONE	NONE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	VLITE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185(m)		10	10	10
Bore	ppm	ASTM D5185(m)		5	3	4
Baryum	ppm	ASTM D5185(m)		2	1	1
Molybdène	ppm	ASTM D5185(m)		1	<1	1
Manganèse	ppm	ASTM D5185(m)		1	1	1
Magnésium	ppm	ASTM D5185(m)		94	99	99
Calcium	ppm	ASTM D5185(m)		3447	3672	3564
Phosphore	ppm	ASTM D5185(m)		1027	1134	1116
Zinc	ppm	ASTM D5185(m)		1196	1223	1185
Soufre	ppm	ASTM D5185(m)		3550	3243	3377
Visc 40°C	cSt	ASTM D7279(m)		50.2	51.1	52.4
Visc 100°C	cSt	ASTM D7279(m)		7.8	7.8	8.1
Indice de viscosité (VI)	Scale	ASTM D2270*		122	119	124

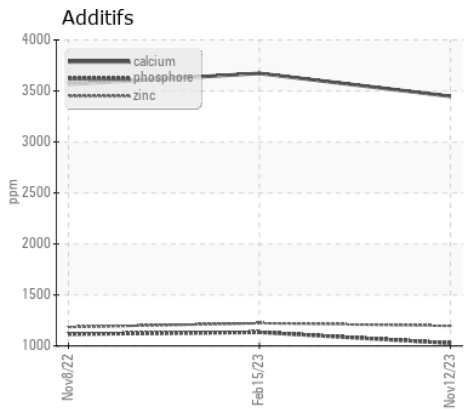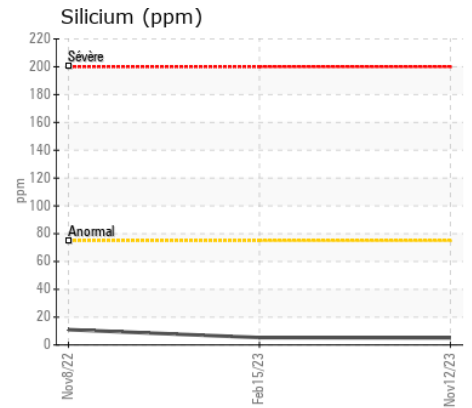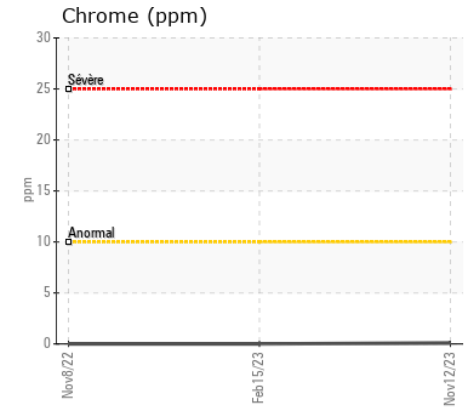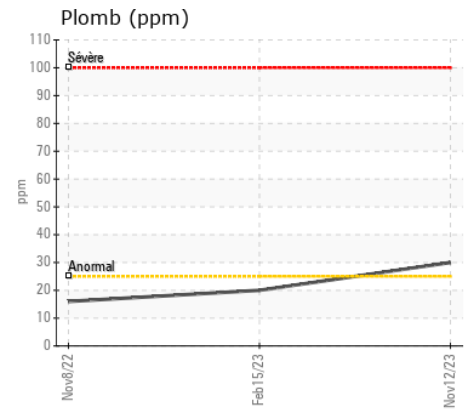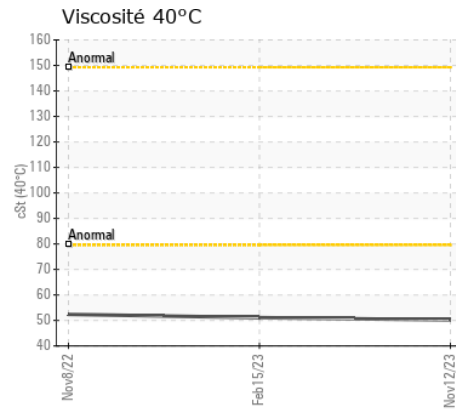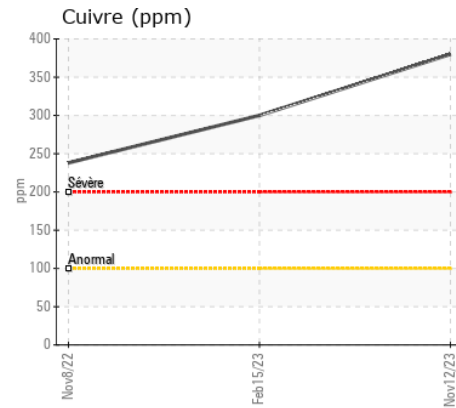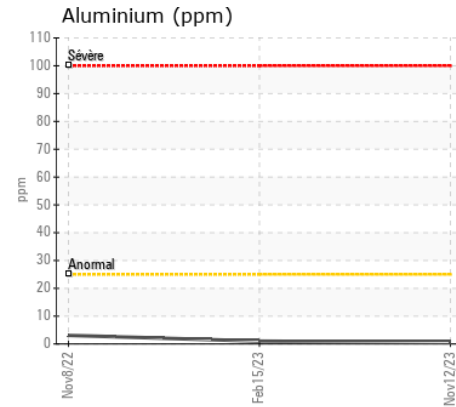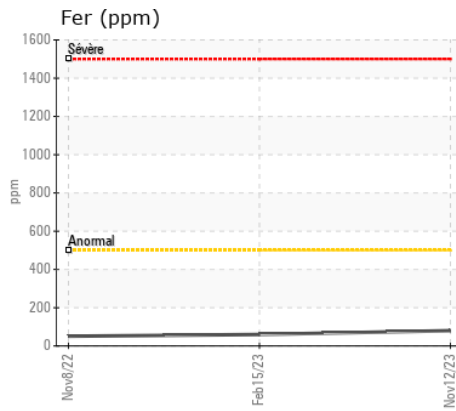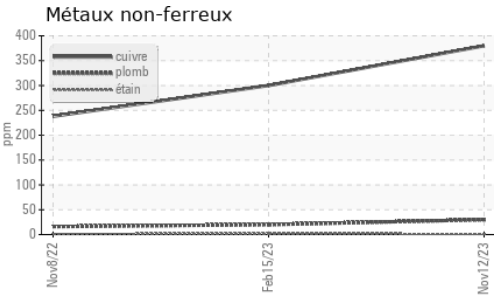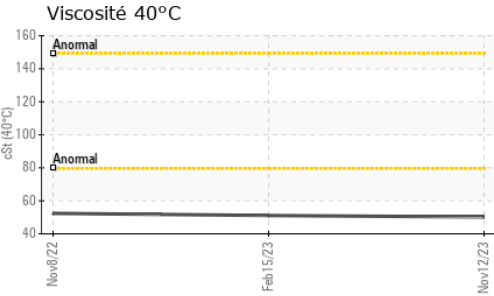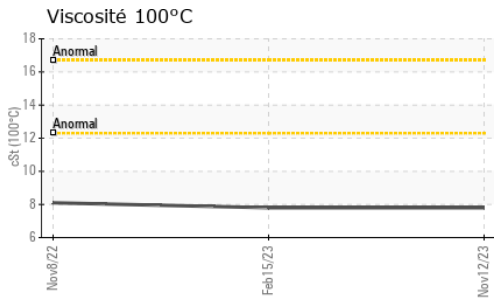

ISO 17025:2017
Accredited
Laboratory

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUVILLE INC.
N° d'échantillon : PC0082333 **Reçu** : 13 Nov 2023
N° de laboratoire : 02595845 **Diagnostiqué** : 14 Nov 2023
Numéro unique : 5680925 **Diagnostiqueur** : Kevin Marson
Analyse : MOB 1 (Additional Tests: KV100, VI)

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

270 RUE BRUNET
MONT ST-HILAIRE, QC
CA J3H 0M6
Contact: Martin Trudel
mtrudel@michaudville.com

T:
F: