



# RAPPORT D'ANALYSE D'HUILE

USURE	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
ÉTAT DU FLUIDE	<b>NORMAL</b>

Identité de la machine

**3305**

Composant

**Moteur diesel**

Fluid

**PETRO CANADA DURON SHP 10W30 (--- LTR)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		<b>WC0877572</b>	WC0857903	---
Date d'échant.		Client Info		<b>23 Nov 2023</b>	10 Oct 2023	---
Âge d la Machine	mls	Client Info		<b>22758</b>	21572	---
Âge de l'huile	mls	Client Info		<b>22758</b>	21572	---
Âge du filtre	mls	Client Info		<b>22758</b>	21572	---
Huile changée		Client Info		<b>Changed</b>	Changed	---
Filtre changé		Client Info		<b>Changed</b>	Changed	---
Statut de l'échant.				<b>NORMAL</b>	NORMAL	---

## USURE

Metal levels are typical for a new component breaking in.

Fer	ppm	ASTM D5185(m)	>90	<b>25</b>	39	---
Chrome	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	---
Titane	ppm	ASTM D5185(m)	>2	<b>0</b>	0	---
Argent	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	---
Aluminium	ppm	ASTM D5185(m)	>20	<b>9</b>	8	---
Plomb	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	---
Cuivre	ppm	ASTM D5185(m)	>330	<b>2</b>	14	---
Étain	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---

## CONTAMINATION










Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicium	ppm	ASTM D5185(m)	>25	<b>5</b>	19	---
Potassium	ppm	ASTM D5185(m)	>20	<b>13</b>	8	---
Essence		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	---
L'eau		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
% de suie	%	ASTM D7844*	>6	<b>0.2</b>	0.2	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.0</b>	10.6	---
Sulfatation	Abs/.1mm	ASTM D7415*	>30	<b>19.7</b>	21.6	---
Eau émulsifiée	scalar	Visual*	>0.2	<b>NEG</b>	NEG	---

## ÉTAT DU FLUIDE

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>1</b>	6	---
Bore	ppm	ASTM D5185(m)	2	<b>7</b>	26	---
Baryum	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	5	---
Molybdène	ppm	ASTM D5185(m)	50	<b>58</b>	50	---
Manganèse	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	3	---
Magnésium	ppm	ASTM D5185(m)	950	<b>909</b>	845	---
Calcium	ppm	ASTM D5185(m)	1050	<b>1276</b>	1200	---
Phosphore	ppm	ASTM D5185(m)	995	<b>983</b>	759	---
Zinc	ppm	ASTM D5185(m)	1180	<b>1156</b>	899	---
Soufre	ppm	ASTM D5185(m)	2600	<b>2796</b>	1924	---
Oxydation	Abs/.1mm	ASTM D7414*	>25	<b>16.5</b>	20.8	---
Visc 100°C	cSt	ASTM D7279(m)	12.00	<b>11.1</b>	11.6	---

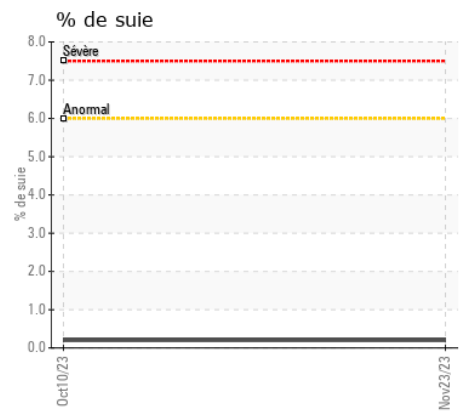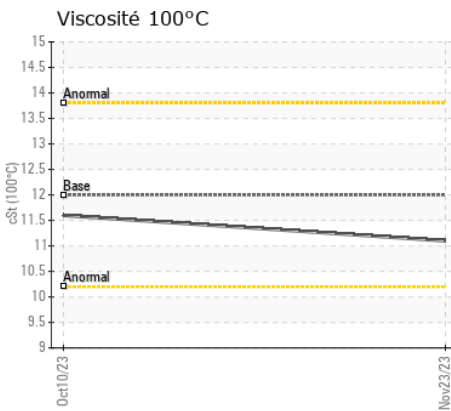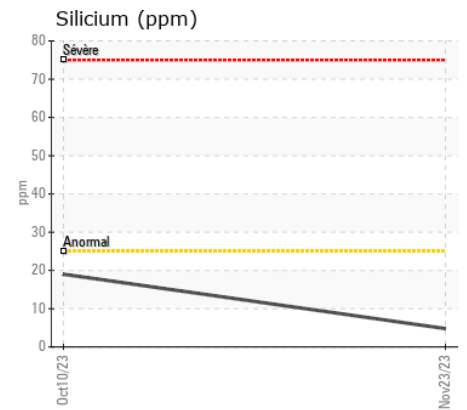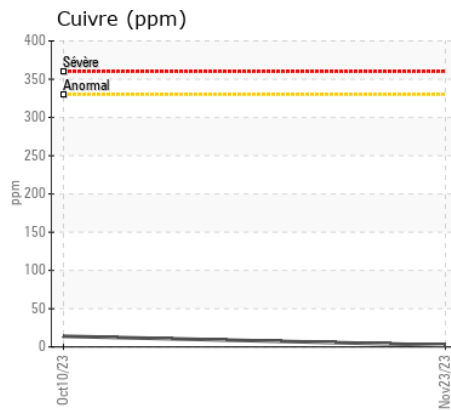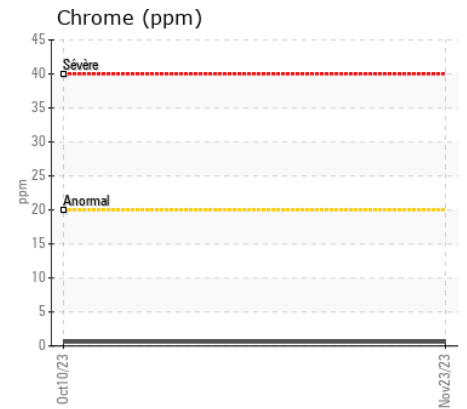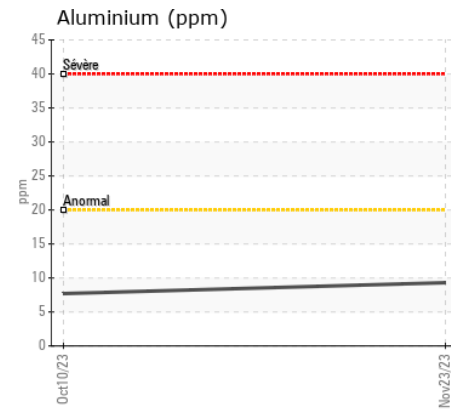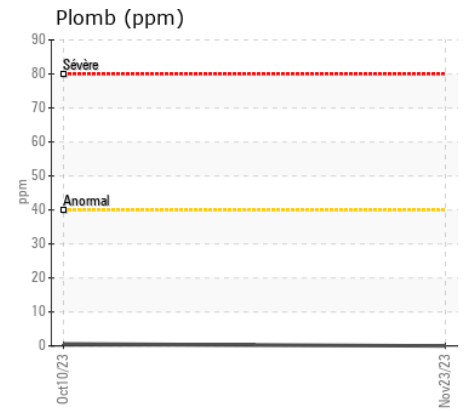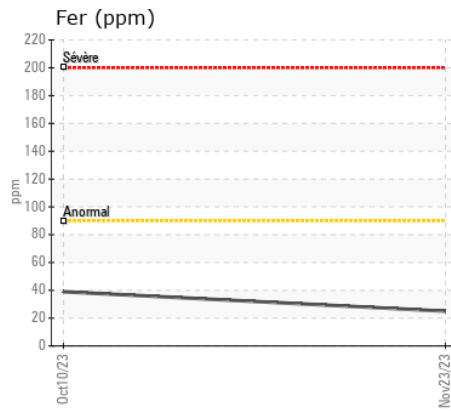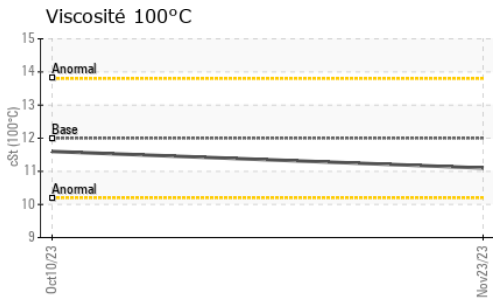

ISO 17025:2017  
Accredited  
Laboratory

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**N° d'échantillon** : WC0877572  
**N° de laboratoire** : 02610225  
**Numéro unique** : 5711311  
**Analyse** : MOB 1

**Reçu** : 22 Jan 2024  
**Diagnostiqué** : 23 Jan 2024  
**Diagnostiqueur** : Wes Davis

**MANITOU LIN TRANSPORT**  
 1890 DES SOURCES BOULEVARD  
 POINTE CLAIRE, QC  
 CA H9R 5B1  
 Contact: Eric Marcelin  
 emarcelin@manitoulintransport.com  
 T: (514)694-5111  
 F: (514)694-9739

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.