



USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Identité de la machine

6701

Composant

Système hydraulique

Fluid

{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

USURE

All component wear rates are normal.











CONTAMINATION

There is no indication of any contamination in the component(unconfirmed).

ÉTAT DU FLUIDE

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0084351	PC0078359	PC0066550
Date d'échant.		Client Info		12 Mar 2024	13 Sep 2023	24 Apr 2023
Âge d la Machine	hrs	Client Info		4182	4078	3955
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL
Fer	ppm	ASTM D5185(m)	>20	5	4	3
Chrome	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	0
Titane	ppm	ASTM D5185(m)		0	0	0
Argent	ppm	ASTM D5185(m)		0	0	0
Aluminium	ppm	ASTM D5185(m)	>10	<1	<1	0
Plomb	ppm	ASTM D5185(m)	>10	<1	<1	<1
Cuivre	ppm	ASTM D5185(m)	>75	1	1	<1
Étain	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	NONE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE
Silicium	ppm	ASTM D5185(m)	>20	<1	1	<1
Potassium	ppm	ASTM D5185(m)	>20	1	<1	<1
L'eau		WC Method	>0.1	NEG	NEG	NEG
Limon	scalar	Visual*	NONE	NONE	VLITE	NONE
Débris	scalar	Visual*	NONE	NONE	VLITE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	NONE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Bore	ppm	ASTM D5185(m)		<1	0	<1
Baryum	ppm	ASTM D5185(m)		0	0	0
Molybdène	ppm	ASTM D5185(m)		<1	1	<1
Manganèse	ppm	ASTM D5185(m)		0	0	0
Magnésium	ppm	ASTM D5185(m)		19	20	6
Calcium	ppm	ASTM D5185(m)		236	247	181
Phosphore	ppm	ASTM D5185(m)		482	528	511
Zinc	ppm	ASTM D5185(m)		571	581	561
Soufre	ppm	ASTM D5185(m)		1214	1180	1153
Visc 40°C	cSt	ASTM D7279(m)		57.5	57.0	57.3
Visc 100°C	cSt	ASTM D7279(m)		8.4	8.3	8.1
Indice de viscosité (VI)	Scale	ASTM D2270*		117	116	109

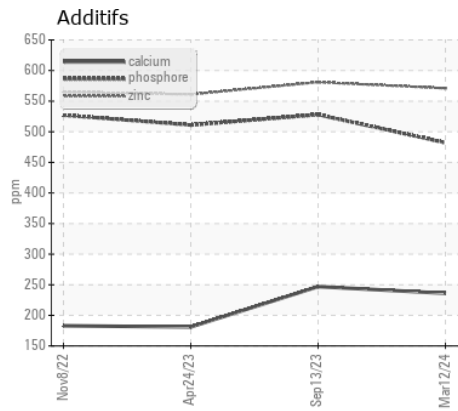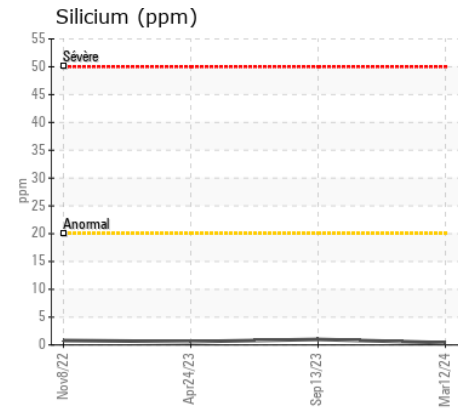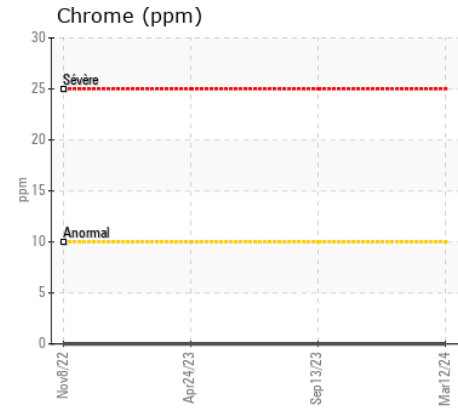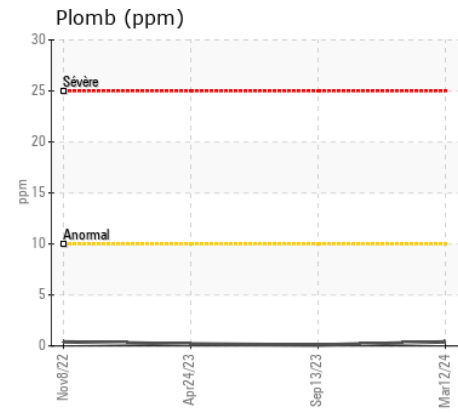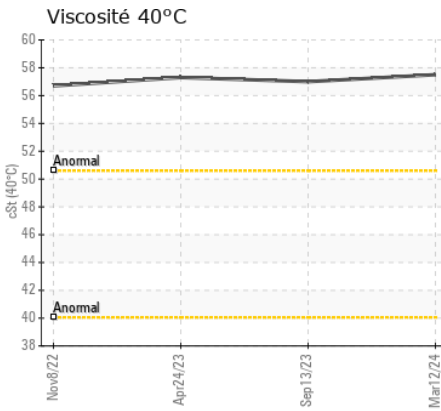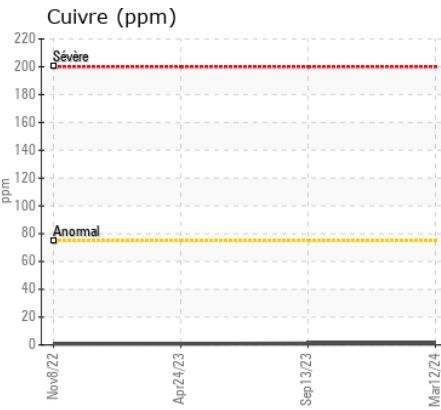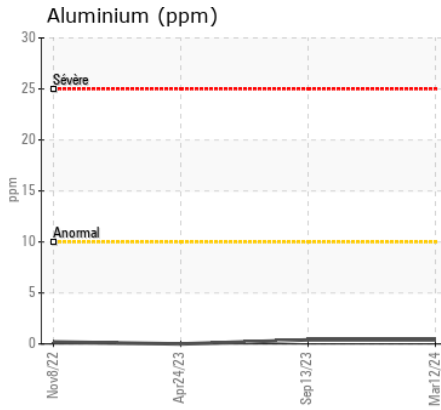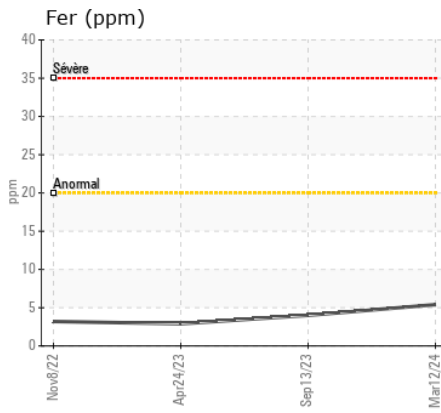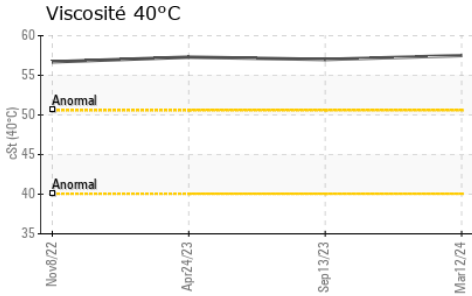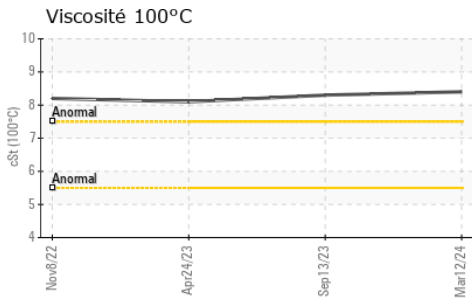

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
N° d'échantillon : PC0084351
N° de laboratoire : 02621797
Numéro unique : 5746916
Analyse : MOB 1 (Additional Tests: KV100, VI)

LES ENTREPRISES MICHAUDVILLE INC.
 270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

T:
F: