



USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Identité de la machine

1226

Composant

Moteur diesel

Fluid

DIESEL ENGINE OIL SAE 5W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0088510	PC0082609	PC0077372
Date d'échant.		Client Info		20 Mar 2024	14 Nov 2023	28 Aug 2023
Âge d la Machine	hrs	Client Info		5016	4550	3997
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL

USURE

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>100	10	13	13
Chrome	ppm	ASTM D5185(m)	>20	0	0	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	<1
Titane	ppm	ASTM D5185(m)		0	0	0
Argent	ppm	ASTM D5185(m)	>3	0	<1	<1
Aluminium	ppm	ASTM D5185(m)	>20	9	11	10
Plomb	ppm	ASTM D5185(m)	>40	0	0	0
Cuivre	ppm	ASTM D5185(m)	>330	<1	1	1
Étain	ppm	ASTM D5185(m)	>15	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicium	ppm	ASTM D5185(m)	>25	10	10	11
Potassium	ppm	ASTM D5185(m)	>20	13	17	16
Essence		WC Method	>5	<1.0	<1.0	<1.0
L'eau		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
% de suie	%	ASTM D7844*	>3	0.2	0.3	0.3
Nitration	Abs/cm	ASTM D7624*	>20	6.8	7.7	7.3
Sulfatation	Abs/.1mm	ASTM D7415*	>30	19.3	19.7	22.0
Eau émulsifiée	scalar	Visual*	>0.2	NEG	NEG	NEG

ÉTAT DU FLUIDE

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>44	1	<1	2
Bore	ppm	ASTM D5185(m)	250	0	1	<1
Baryum	ppm	ASTM D5185(m)	10	0	0	0
Molybdène	ppm	ASTM D5185(m)	100	57	60	56
Manganèse	ppm	ASTM D5185(m)		0	0	<1
Magnésium	ppm	ASTM D5185(m)	450	938	982	931
Calcium	ppm	ASTM D5185(m)	3000	1150	1088	1180
Phosphore	ppm	ASTM D5185(m)	1150	992	1010	1062
Zinc	ppm	ASTM D5185(m)	1350	1191	1200	1216
Soufre	ppm	ASTM D5185(m)	4250	2542	2488	2627
Oxydation	Abs/.1mm	ASTM D7414*	>25	14.8	15.4	15.8
Visc 40°C	cSt	ASTM D7279(m)	91	94.9	94.9	94.1
Visc 100°C	cSt	ASTM D7279(m)	14.4	14.0	14.0	14.1
Indice de viscosité (VI)	Scale	ASTM D2270*	164	150	150	153

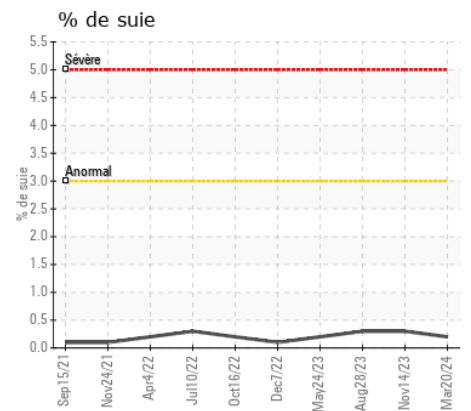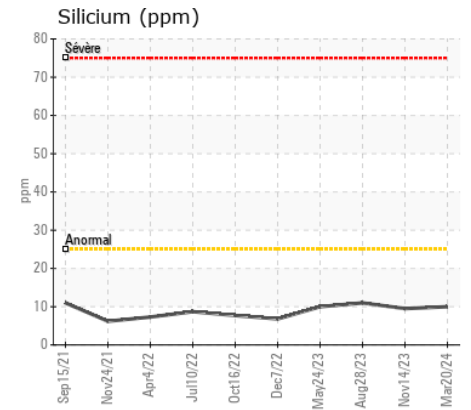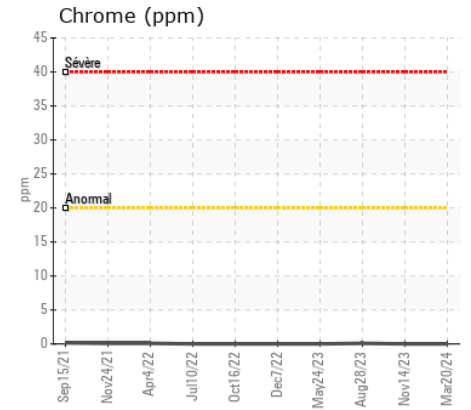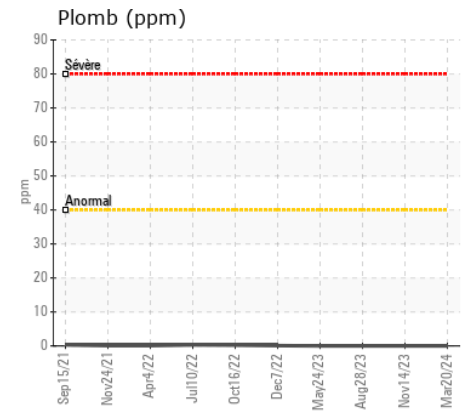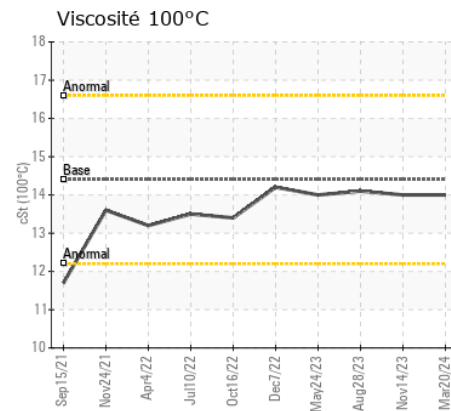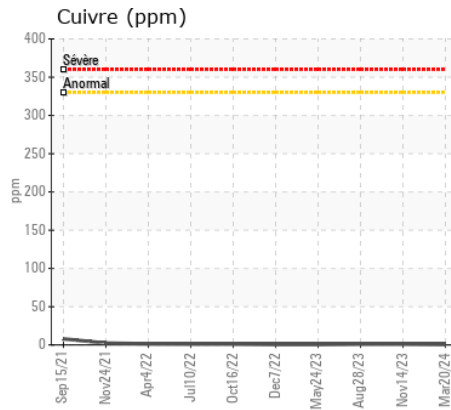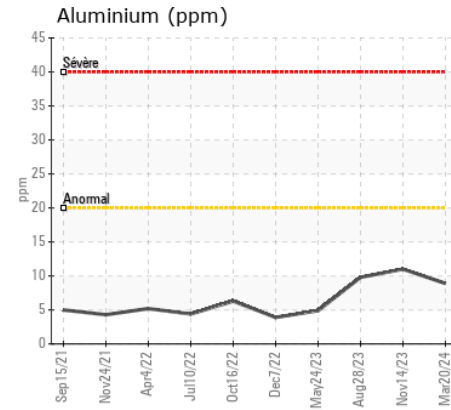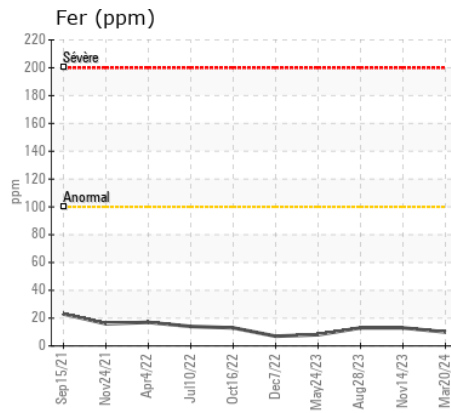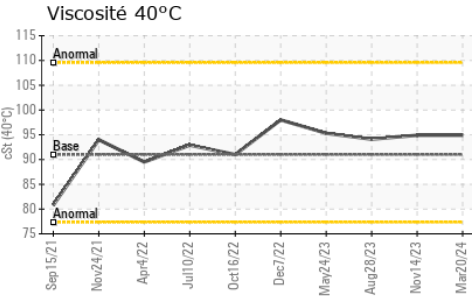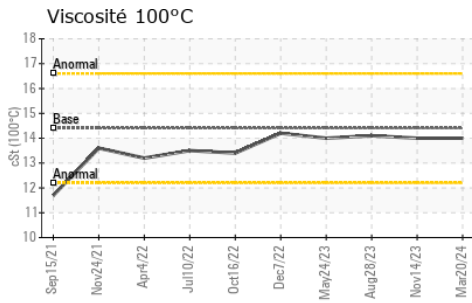

ISO 17025:2017
Accredited
Laboratory

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

N° d'échantillon : PC0088510

N° de laboratoire : 02623643

Numéro unique : 5748762

Analyse : MOB 1 (Additional Tests: KV40, VI)

Reçu : 21 Mar 2024

Tested : 21 Mar 2024

Diagnostiqué : 21 Mar 2024 - Wes Davis

LES ENTREPRISES MICHAUVILLE INC.

270 RUE BRUNET

MONT ST-HILAIRE, QC

CA J3H 0M6

Contact: Martin Trudel

mtrudel@michaudville.com

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

T:

F: