




ABATTOIR CANARD - process tamis rotatif



Customer: PTRHTF60085	System Information	Sample Information
Palmid'Or 230 Rte De La Tramblyronne Trambly, 71520 FR Attn: Florent Nauroy Tel: E-Mail: florent.nauroy@ldc.fr	System Volume: 700 ltr Bulk Operating Temp: 284F / 140C Heating Source: Blanket: Fluid: PETRO CANADA PURITY FG HEAT TRANSFER FLUID Make:	Lab No: 02640938 Analyst: Bill Quesnel CLS,OMA II,MLA-III,LLA-I Sample Date: 05/21/24 Received Date: 06/10/24 Completed: 06/24/24 Bill Quesnel CLS,OMA II,MLA-III,LLA-I

Recommendation: Le fluide peut encore servir. Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Comments:




Sample Date	Received Date	Fluid Age	Sample Location	Flash Point (COC)	Water (KF)	Viscosity (40°C)	Acid Number	Solids	GCD 10%	GCD 50%	GCD 90%	GCD % < 335°C
	mm/dd/yy			°F/°C	ppm	cSt	mg/KOH/g	%wt	°F/°C	°F/°C	°F/°C	%
05/21/24	06/10/24	5.0m		468 / 242	18	36.4	1.02	0.040	730 / 388	824 / 440	915 / 491	2.05
Baseline Data				459 / 237		37.12	0.90		721 / 383	807 / 431	892 / 478	1.5

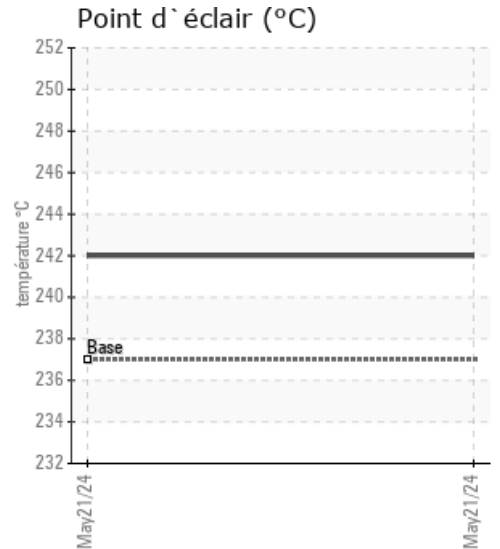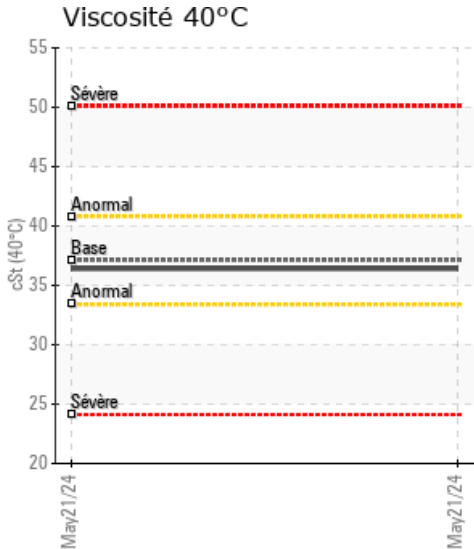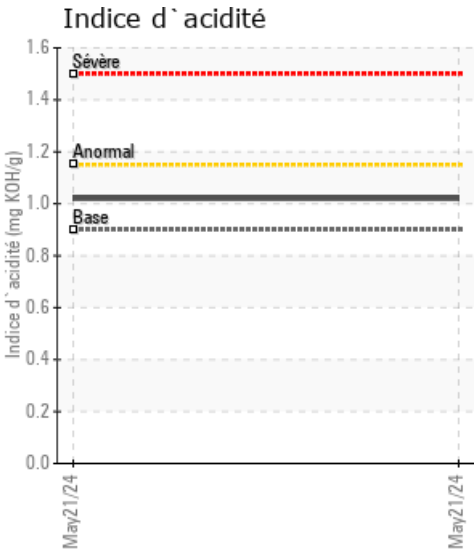

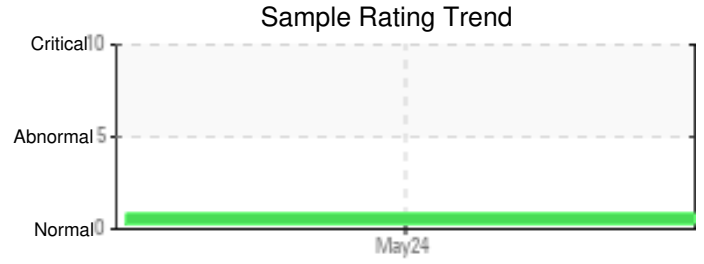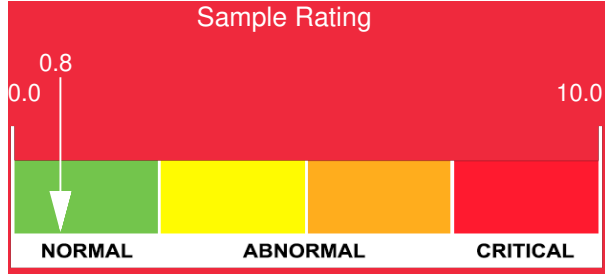

Sample Date	Iron	Chromium	Nickel	Aluminum	Copper	Lead	Tin	Cadmium	Silver	Vanadium	Silicon	Sodium	Potassium	Titanium	Molybdenum	Antimony	Manganese	Lithium	Boron	Magnesium	Calcium	Barium	Phosphorus	Zinc	
05/21/24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	60	0	
Baseline Data			0	0						0			0	0				0	0					230	

Elemental analysis results (above) in parts per million (ppm). [10,000 ppm = 1.0%]

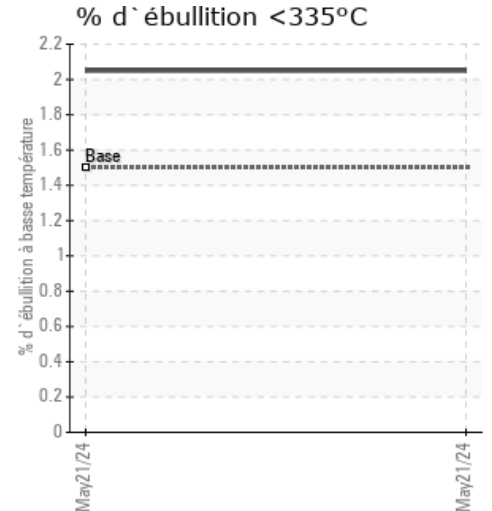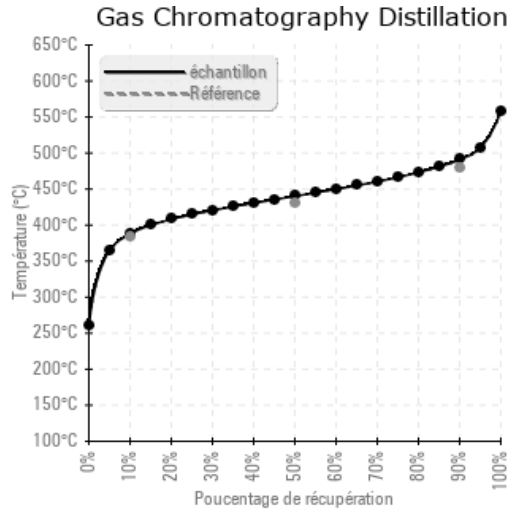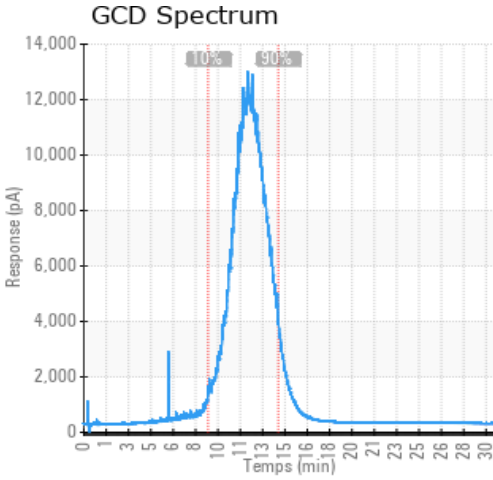

Historical Comments

Petro-Canada makes no representation or warranty of any kind, either express or implied, as to the accuracy or completeness of the analysis and assumes no responsibility and shall have no liability whatsoever with respect to such analysis, or a party's use of it. Petro-Canada is a division of HollyFrontier Corporation.