

LIEBHERR

CONSTRUCTION EQUIPMENT



LIEBHERR LH30M 1253-123497 - Rear Right Wheel Hub

Sample No: LH0272909

Oil Type: GEAR OIL SAE 80W90



SPARTAN RECYCLING
3071 HOWARD ST
SPARTANBURG, SC
US 29303
Contact: SERVICE MANAGER



SAMPLE INFORMATION

Sample Number	LH0272909	LH0212314	---	---
Sample Date	11 Jan 2024	30 Dec 2021	---	---
Machine Hours	4554	981	---	---
Oil Hours	0	0	---	---
Oil Changed	Changed	Changed	---	---
Sample Status	NORMAL	NORMAL	---	---



OIL CONDITION

Visc @ 40°C	cSt	● 119	● 113	---	---
-------------	-----	-------	-------	-----	-----

T:
F:



CONTAMINATION

Water	%	NEG	NEG	---	---
Silicon	ppm	● <1	● 3	---	---
Sodium	ppm	● 0	● 2	---	---
Potassium	ppm	● <1	● 0	---	---

Diagnosis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.



WEAR METALS

Iron	ppm	● 8	● 10	---	---
Copper	ppm	● <1	● 2	---	---
Lead	ppm	● 0	● 0	---	---
Tin	ppm	0	<1	---	---
Aluminum	ppm	● 2	● 0	---	---
Chromium	ppm	● <1	● <1	---	---
Molybdenum	ppm	● 0	● <1	---	---
Nickel	ppm	● 0	● 0	---	---
Titanium	ppm	0	0	---	---
Silver	ppm	0	<1	---	---
Manganese	ppm	● 0	● <1	---	---
Vanadium	ppm	0	0	---	---



ADDITIVES


Calcium	ppm	● 53	● 274	---	---
Magnesium	ppm	● <1	● 1	---	---
Zinc	ppm	● 0	● 149	---	---
Phosphorus	ppm	● 347	● 464	---	---
Barium	ppm	● 3	● 0	---	---
Boron	ppm	● 3	● 78	---	---

Depot: SPASPALH
Unique No: 10834557
Signed: Don Baldrige
Report Date: 19 Jan 2024




GRAPHS

Ferrous Alloys

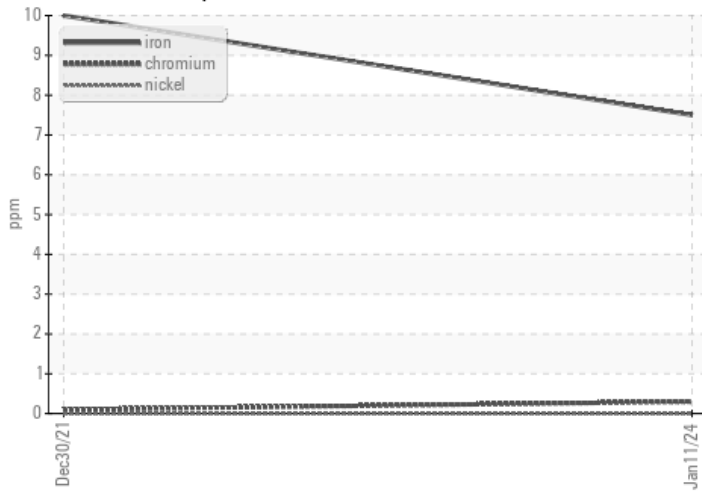

Non-ferrous Metals

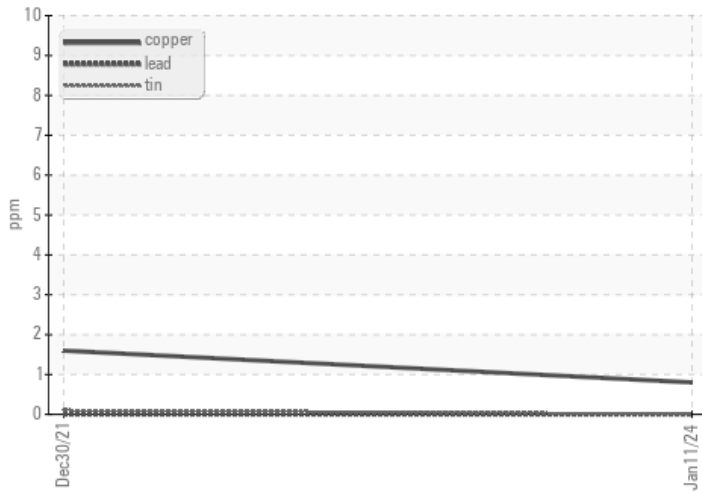

Viscosity @ 40°C

