

LIEBHERR

CONSTRUCTION EQUIPMENT



LIEBHERR LTM1120-4.1 081556 - Right Hub

Sample No: LH0259083

Oil Type: LIEBHERR GEAR HYPOID 90 EP



SAMPLE INFORMATION

Sample Number	LH0259083	LH0259089	---	---
Sample Date	22 Jan 2024	21 Jan 2024	---	---
Machine Hours	0	0	---	---
Oil Hours	0	0	---	---
Oil Changed	Changed	Changed	---	---
Sample Status	NORMAL	NORMAL	---	---

LIEBHERR USA CO - MOBILE AND CRAWLER CRANES
 4100 CHESTNUT AVENUE
 NEWPORT NEWS, VA
 US 23607
 Contact: TERENCE VANDERLENDE
 TERENCE.VANDERLENDE@LIEBHERR.COM
 T:
 F:



OIL CONDITION

Visc @ 40°C	cSt	128	126	---	---
-------------	-----	-----	-----	-----	-----



CONTAMINATION

Water	%	NEG	NEG	---	---
Silicon	ppm	3	4	---	---
Sodium	ppm	7	7	---	---
Potassium	ppm	0	0	---	---

Diagnosis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.



WEAR METALS

Iron	ppm	72	115	---	---
Copper	ppm	9	21	---	---
Lead	ppm	0	0	---	---
Tin	ppm	<1	<1	---	---
Aluminum	ppm	<1	1	---	---
Chromium	ppm	<1	<1	---	---
Molybdenum	ppm	<1	<1	---	---
Nickel	ppm	0	0	---	---
Titanium	ppm	<1	0	---	---
Silver	ppm	0	0	---	---
Manganese	ppm	2	4	---	---
Vanadium	ppm	0	0	---	---



ADDITIVES


Calcium	ppm	97	110	---	---
Magnesium	ppm	602	615	---	---
Zinc	ppm	64	79	---	---
Phosphorus	ppm	1195	1215	---	---
Barium	ppm	0	0	---	---
Boron	ppm	318	364	---	---

Depot: LIENEW
 Unique No: 10846808
 Signed: Sean Felton
 Report Date: 26 Jan 2024




GRAPHS

Ferrous Alloys

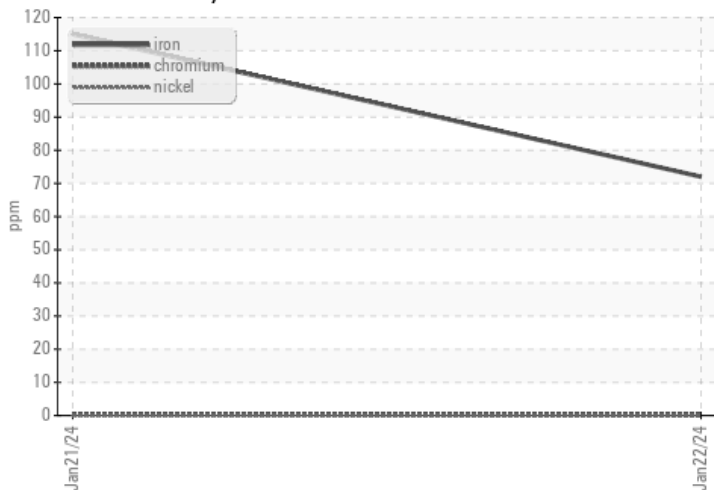

Non-ferrous Metals

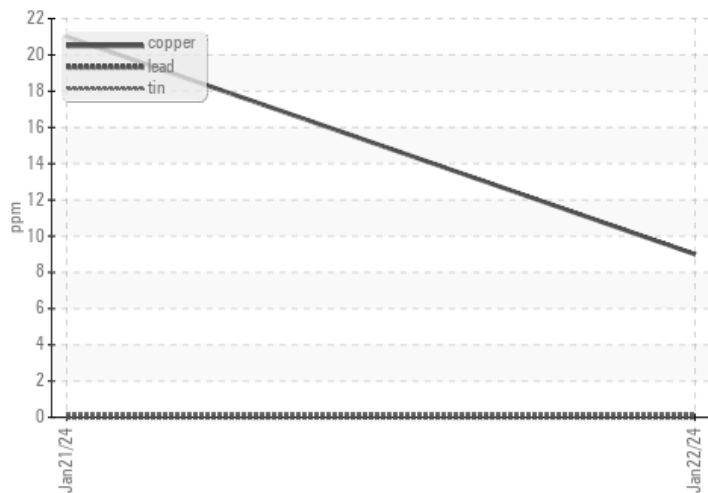

Viscosity @ 40°C

