




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
901145
 Component
Natural Gas Engine
 Fluid
PETRO CANADA DURON GEO LD 15W40 (--- LTR)

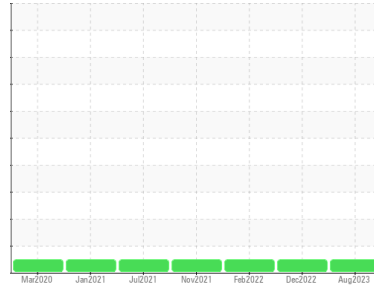

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0088941	GFL0061090	GFL0041386
Sample Date	Client Info		02 Aug 2023	06 Dec 2022	02 Feb 2022
Machine Age	hrs	Client Info	0	1464	0
Oil Age	hrs	Client Info	0	1011	0
Oil Changed	Client Info		N/A	Changed	N/A
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>45	15	13	10
Chromium	ppm	ASTM D5185(m)	>4	1	1	1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>5	0	<1	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	3	3	2
Lead	ppm	ASTM D5185(m)	>45	10	2	<1
Copper	ppm	ASTM D5185(m)	>175	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>4	<1	<1	<1
Antimony	ppm	ASTM D5185(m)		0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	50	7	6	10
Barium	ppm	ASTM D5185(m)	5	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	55	53	53
Manganese	ppm	ASTM D5185(m)	0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	560	612	567	587
Calcium	ppm	ASTM D5185(m)	1510	1698	1718	1524
Phosphorus	ppm	ASTM D5185(m)	780	792	750	709
Zinc	ppm	ASTM D5185(m)	870	960	915	973
Sulfur	ppm	ASTM D5185(m)	2040	2007	1940	2066
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	4	6	4
Sodium	ppm	ASTM D5185(m)		11	9	10
Potassium	ppm	ASTM D5185(m)	>20	2	0	1

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	12.8	12.8	12.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	26.4	26.1	22.6

FLUID DEGRADATION


	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	22.5	21.8	19.3

VISUAL

	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG











OIL ANALYSIS REPORT

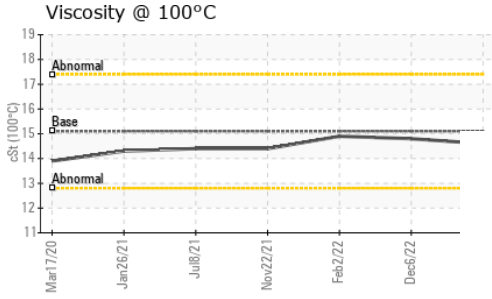

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	14.6	14.8	14.9

GRAPHS

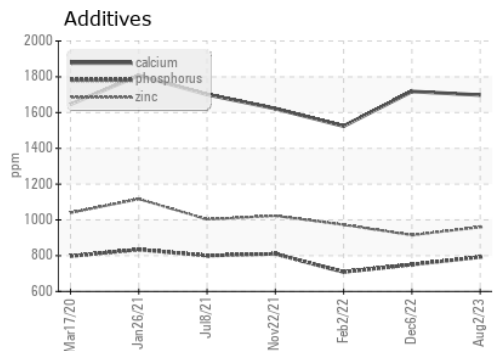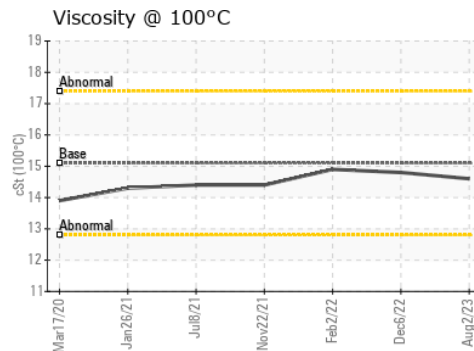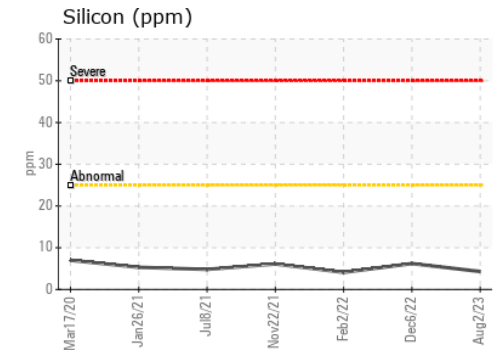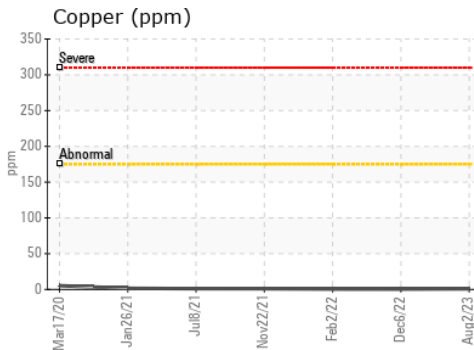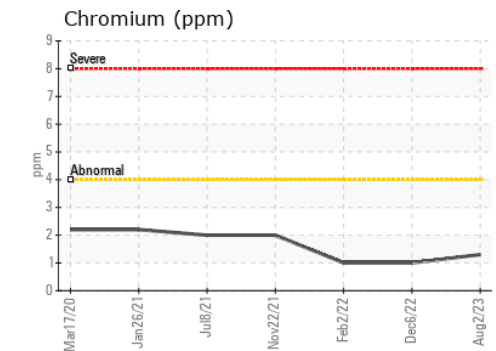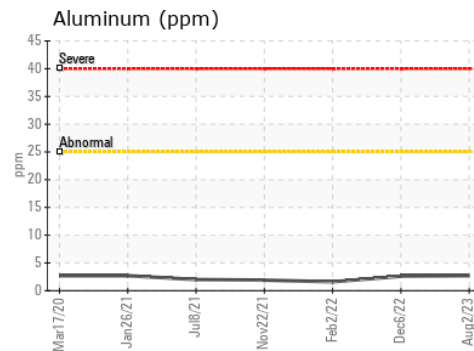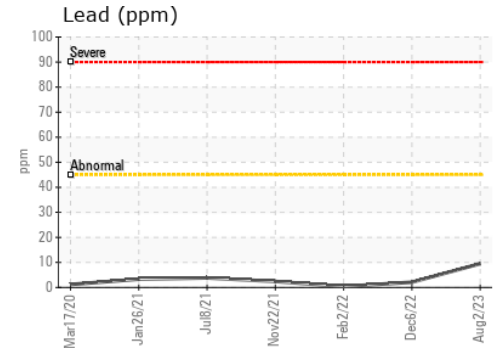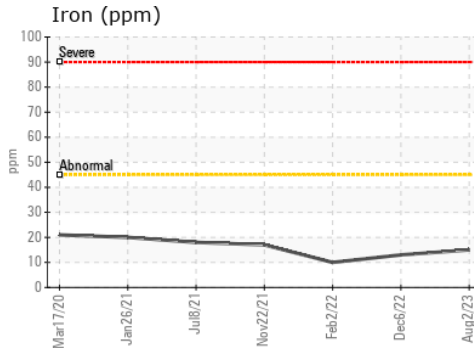

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
 Sample No. : GFL0088941 Received : 03 Aug 2023
 Lab Number : **02574005** Diagnosed : 03 Aug 2023
 Unique Number : 5619056 Diagnostician : Wes Davis
 Test Package : MOB 1

GFL Environmental - 216
 15 Bermondsey Road
 Toronto, ON
 CA M4B 0A6
 Contact: Tom Hatzioannidis
 thatzioannidis@gflenv.com
 T: (416)678-9340
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.