




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

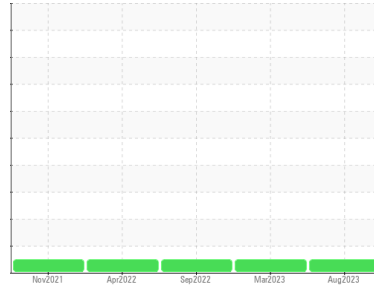

Machine Id  
**731105**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0085855</b>	GFL0071073	GFL0044237
Sample Date	Client Info		<b>16 Aug 2023</b>	02 Mar 2023	26 Sep 2022
Machine Age	hrs	Client Info	<b>5626</b>	4479	3333
Oil Age	hrs	Client Info	<b>1200</b>	1200	1000
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >50	<b>18</b>	13	12
Chromium	ppm	ASTM D5185(m) >4	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m) >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >9	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m) >30	<b>8</b>	<1	<1
Copper	ppm	ASTM D5185(m) >35	<b>2</b>	1	2
Tin	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 50	<b>7</b>	9	9
Barium	ppm	ASTM D5185(m) 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 50	<b>62</b>	57	53
Manganese	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m) 560	<b>683</b>	598	561
Calcium	ppm	ASTM D5185(m) 1510	<b>1743</b>	1809	1675
Phosphorus	ppm	ASTM D5185(m) 780	<b>852</b>	775	747
Zinc	ppm	ASTM D5185(m) 870	<b>1026</b>	1001	946
Sulfur	ppm	ASTM D5185(m) 2040	<b>2171</b>	2106	2062
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >+100	<b>4</b>	4	4
Sodium	ppm	ASTM D5185(m)	<b>12</b>	9	8
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	<b>&gt;20</b>	7.4	11.8
Sulfation	Abs/.1mm	ASTM D7415*	<b>&gt;30</b>	20.0	24.1

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	<b>&gt;25</b>	21.7	12.4
				19.8	

## VISUAL

	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	<b>&gt;0.1</b>	<b>NEG</b>	NEG
Free Water	scalar	Visual*	<b>NEG</b>	NEG	NEG











# OIL ANALYSIS REPORT

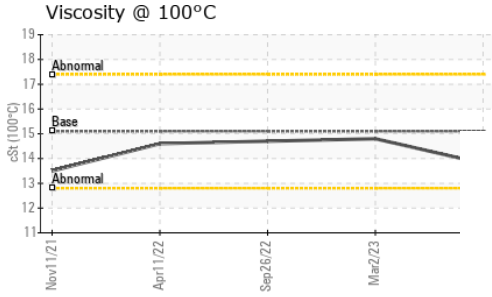

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	<b>13.8</b>	14.8	14.7

## GRAPHS

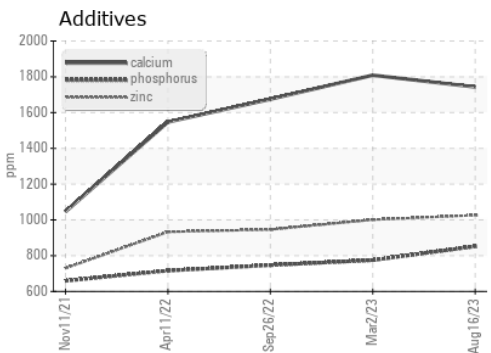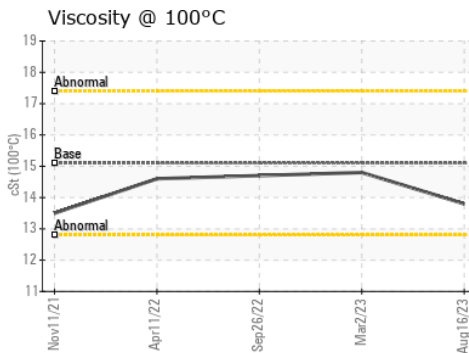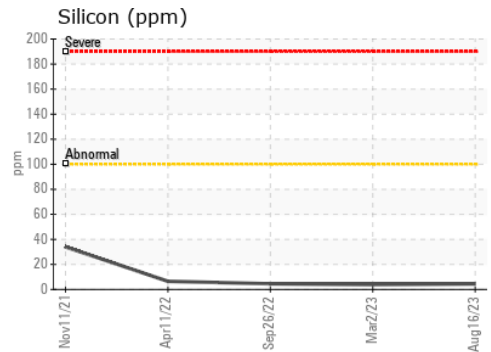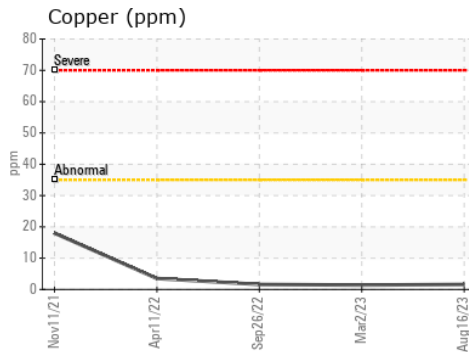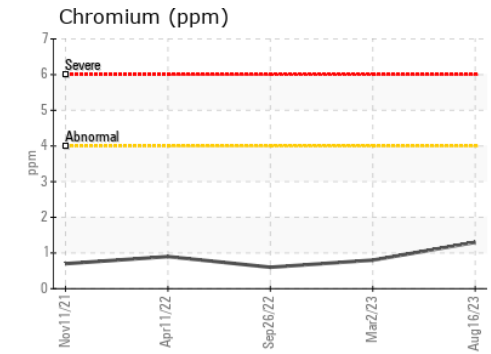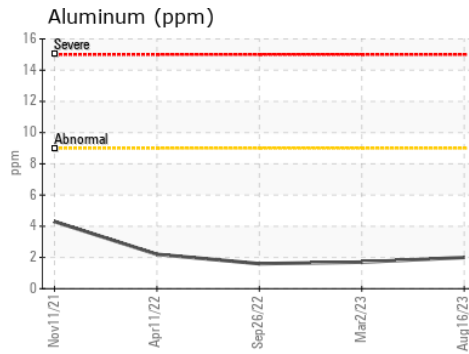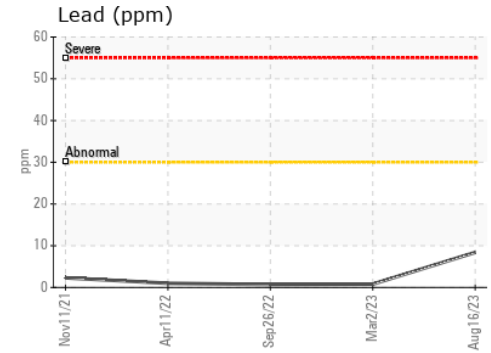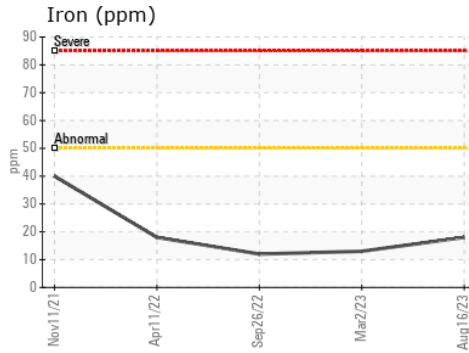

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 209 - Hamilton**  
**Sample No.** : GFL0085855 **Received** : 21 Aug 2023  
**Lab Number** : 02577043 **Diagnosed** : 21 Aug 2023  
**Unique Number** : 5630103 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

560 Seaman Street  
 Stoney Creek, ON  
 CA L8E 3X7  
 Contact: Fred Carleton  
 fred.carleton@gflenv.com  
 T: (289)925-6693  
 F: (905)664-9008