




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

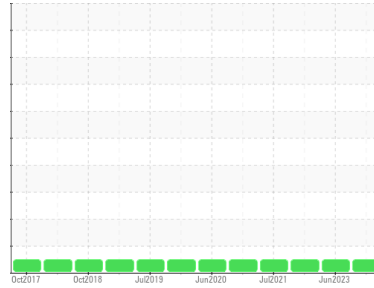

Machine Id  
**701028**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (25 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0091059</b>	GFL0081981	GFL0077202
Sample Date	Client Info		<b>23 Aug 2023</b>	01 Jun 2023	20 Apr 2023
Machine Age	hrs	Client Info	<b>83763</b>	10360	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>80	<b>22</b>	13	29
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>30	<b>11</b>	2	5
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>150	<b>1</b>	<1	1
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>5</b>	8	19
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>59</b>	58	54
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>945</b>	885	712
Calcium	ppm	ASTM D5185(m)	1070	<b>1029</b>	1119	1415
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1012</b>	1065	1007
Zinc	ppm	ASTM D5185(m)	1270	<b>1199</b>	1150	1171
Sulfur	ppm	ASTM D5185(m)	2060	<b>2422</b>	2566	2540
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	<b>4</b>	3	5
Sodium	ppm	ASTM D5185(m)		<b>8</b>	6	9
Potassium	ppm	ASTM D5185(m)	>20	<b>22</b>	2	4

## INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.3</b>	0.2	0.5
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.1</b>	8.2	11.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>21.7</b>	20.0	24.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>17.3</b>	16.1	22.2











# OIL ANALYSIS REPORT

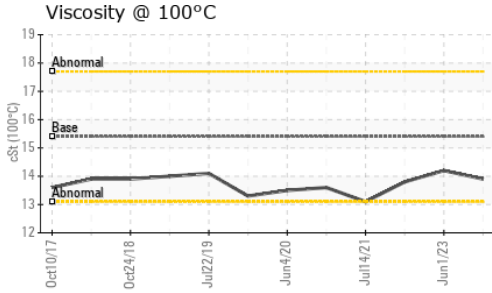

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>13.9</b>	14.2	13.8

## GRAPHS

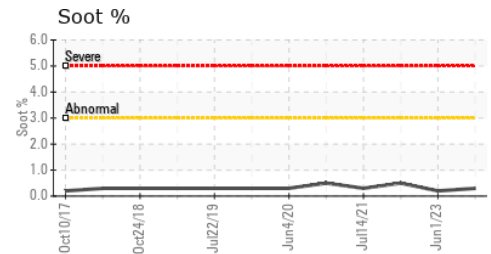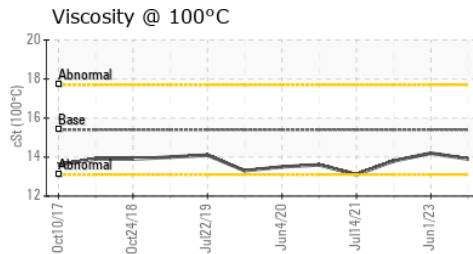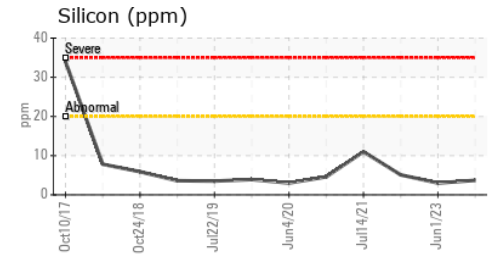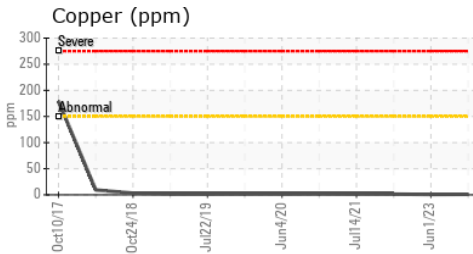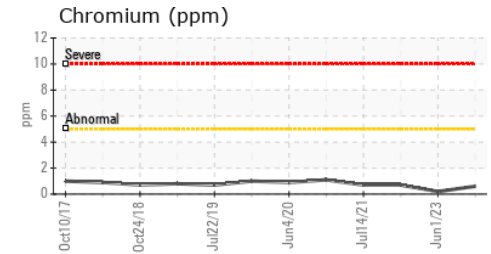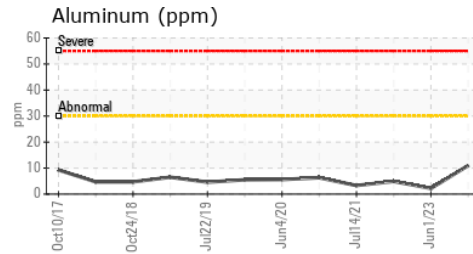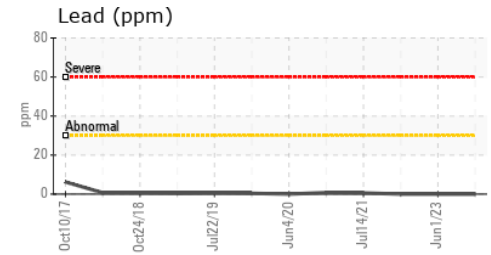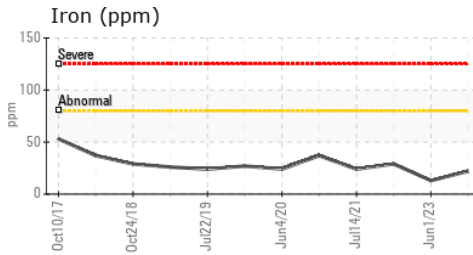

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0091059 **Received** : 06 Sep 2023  
**Lab Number** : **02580574** **Diagnosed** : 06 Sep 2023  
**Unique Number** : 5633634 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**GFL Environmental - 217 - Aurora**  
 14131 BAYVIEW AVE, AURORA YARD  
 AURORA, ON  
 CA L4G 0K6  
 Contact: Mike Havens  
 MHavens@gflenv.com  
 T:  
 F: (905)713-2445

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.