




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

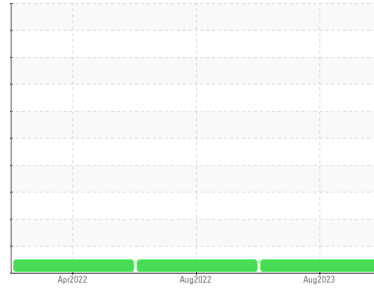

Machine Id  
**512011**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0029316</b>	GFL0020102	GFL0029333
Sample Date	Client Info		<b>08 Aug 2023</b>	24 Aug 2022	13 Apr 2022
Machine Age	kms	Client Info	<b>5403</b>	83473	40559
Oil Age	kms	Client Info	<b>606</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>80	<b>9</b>	9	13
Chromium	ppm	ASTM D5185(m)	>5	<b>1</b>	1	2
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	1
Aluminum	ppm	ASTM D5185(m)	>30	<b>4</b>	8	20
Lead	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	<1	3
Copper	ppm	ASTM D5185(m)	>150	<b>12</b>	34	110
Tin	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	2	3
Antimony	ppm	ASTM D5185(m)		<b>0</b>	1	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>2</b>	2	6
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>60</b>	61	55
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>996</b>	989	1008
Calcium	ppm	ASTM D5185(m)	1070	<b>1060</b>	1110	1108
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1030</b>	1012	988
Zinc	ppm	ASTM D5185(m)	1270	<b>1198</b>	1203	1196
Sulfur	ppm	ASTM D5185(m)	2060	<b>2279</b>	2142	2019
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	<b>4</b>	3	3
Sodium	ppm	ASTM D5185(m)		<b>2</b>	2	2
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	13	34

## INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.3</b>	0.1	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.5</b>	7.8	7.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.4</b>	20.4	21.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.6</b>	16.6	16.0











# OIL ANALYSIS REPORT

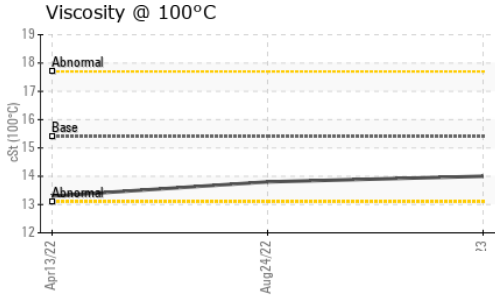

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.0	13.8

## GRAPHS

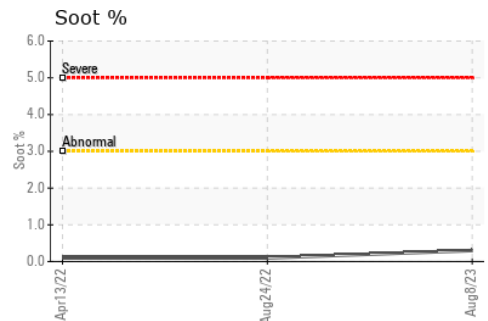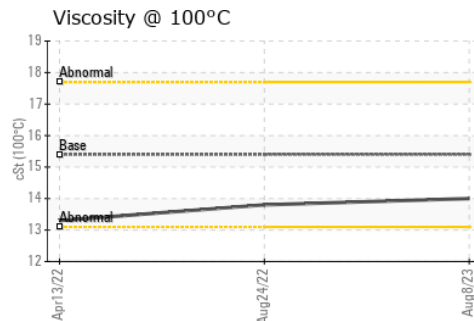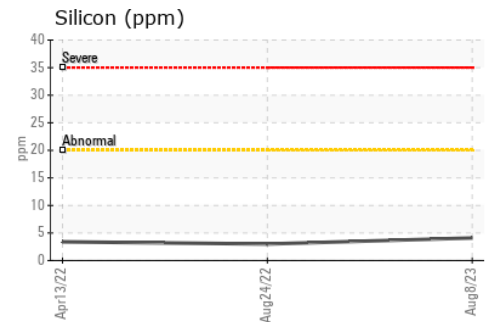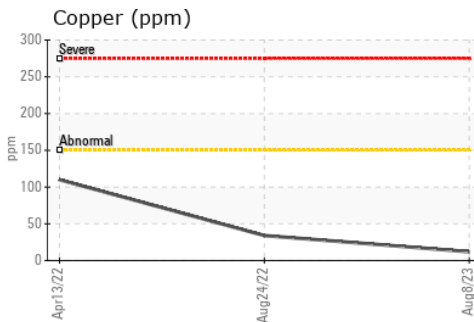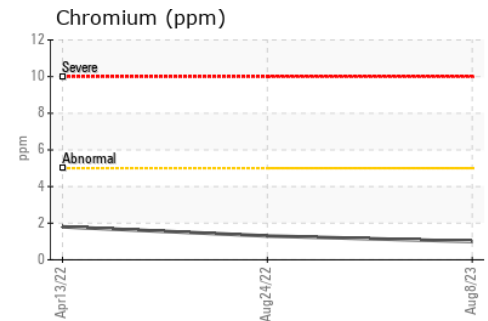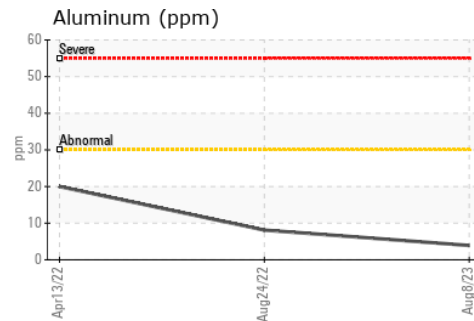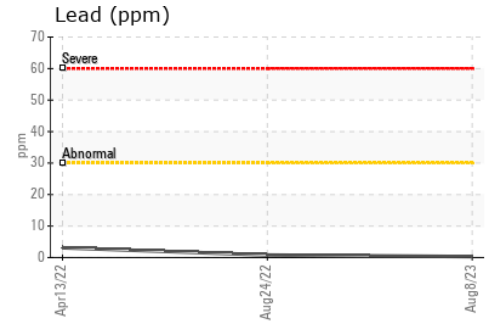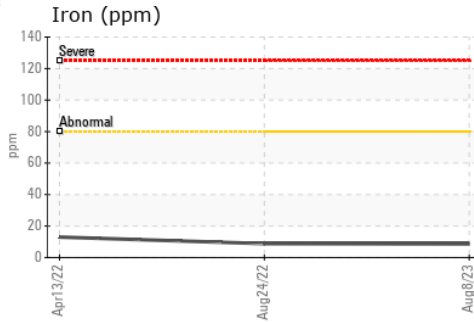

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 571 - Cranbrook Hauling TS LF  
**Sample No.** : GFL0029316 **Received** : 18 Sep 2023 1425 Industrial Road 2  
**Lab Number** : 02583132 **Diagnosed** : 18 Sep 2023 Cranbrook, BC  
**Unique Number** : 5644197 **Diagnostician** : Wes Davis CA V1C 5X5  
**Test Package** : MOB 1 **Contact:** Michael Miles

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

mmiles@gflenv.com  
 T: (250)417-3607  
 F: (250)417-3617