


Area
Aft Machinery Space [450204421]
Machine Id
Thruster Aft Center - Steering System (S/N Sample Tag CL-06001-S2)
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX MV 36 (200 LTR)

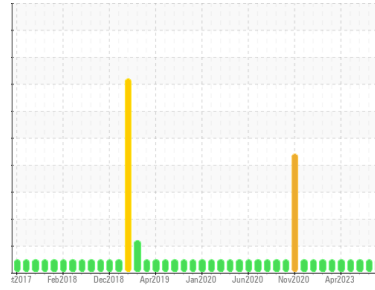

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC	PC	PC
Sample Date	Client Info	14 Sep 2023	14 Aug 2023	19 Jul 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	0	0	8
Iron	ppm	ASTM D5185(m) >20	<1	1
Chromium	ppm	ASTM D5185(m) >10	0	0
Nickel	ppm	ASTM D5185(m) >10	<1	<1
Titanium	ppm	ASTM D5185(m)	0	0
Silver	ppm	ASTM D5185(m)	<1	0
Aluminum	ppm	ASTM D5185(m) >10	0	0
Lead	ppm	ASTM D5185(m) >20	<1	<1
Copper	ppm	ASTM D5185(m) >20	2	2
Tin	ppm	ASTM D5185(m) >10	0	0
Antimony	ppm	ASTM D5185(m)	0	0
Vanadium	ppm	ASTM D5185(m)	0	0
Beryllium	ppm	ASTM D5185(m)	0	0
Cadmium	ppm	ASTM D5185(m)	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<1	<1
Barium	ppm	ASTM D5185(m) 0	0	0
Molybdenum	ppm	ASTM D5185(m) 0	0	0
Manganese	ppm	ASTM D5185(m) 1	0	0
Magnesium	ppm	ASTM D5185(m) 0	<1	<1
Calcium	ppm	ASTM D5185(m) 135	69	74
Phosphorus	ppm	ASTM D5185(m) 236	312	357
Zinc	ppm	ASTM D5185(m) 317	391	421
Sulfur	ppm	ASTM D5185(m) 561	751	777
Lithium	ppm	ASTM D5185(m)	<1	<1






CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	0	<1
Sodium	ppm	ASTM D5185(m)	<1	0
Potassium	ppm	ASTM D5185(m) >20	0	<1

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	95	302	306
Particles >6µm	ASTM D7647 >5000	32	94	99
Particles >14µm	ASTM D7647 >640	4	8	12
Particles >21µm	ASTM D7647 >160	1	2	3
Particles >38µm	ASTM D7647 >40	0	0	0
Particles >71µm	ASTM D7647 >10	0	0	0
Oil Cleanliness	ISO 4406 (c) >--/19/16	14/12/9	15/14/10	15/14/11

OIL ANALYSIS REPORT

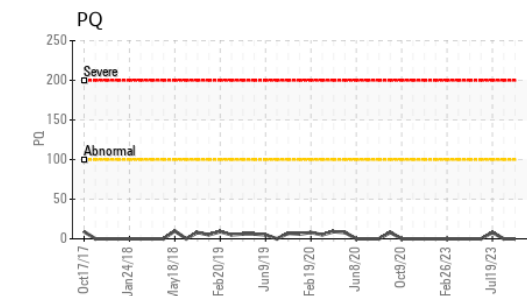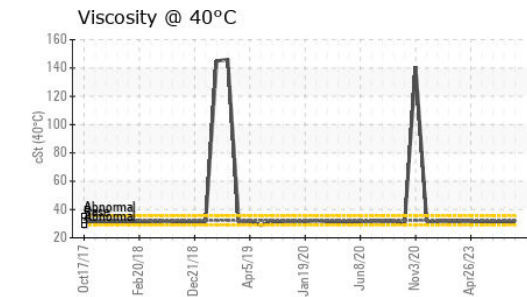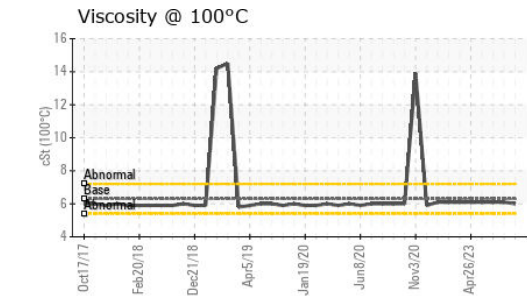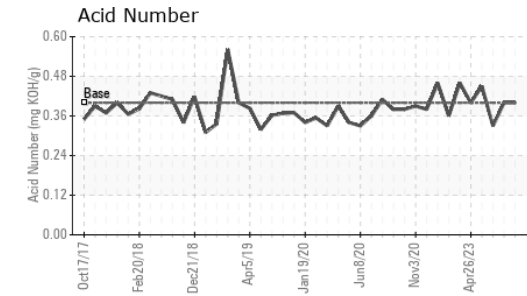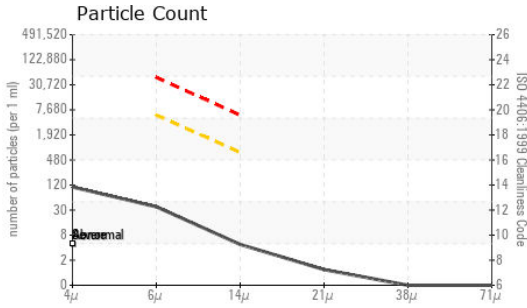


FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D974*	0.40	0.40	0.33
VISUAL				
method	limit/base	current	history1	history2
White Metal	scalar Visual*	NONE	NONE	NONE
Yellow Metal	scalar Visual*	NONE	NONE	NONE
Precipitate	scalar Visual*	NONE	NONE	NONE
Silt	scalar Visual*	NONE	NONE	NONE
Debris	scalar Visual*	NONE	NONE	NONE
Sand/Dirt	scalar Visual*	NONE	NONE	NONE
Appearance	scalar Visual*	NORML	NORML	NORML
Odor	scalar Visual*	NORML	NORML	NORML
Emulsified Water	scalar Visual*	>0.05	NEG	NEG
Free Water	scalar Visual*		NEG	NEG

FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D7279(m)	32.25	31.5	31.5
Visc @ 100°C	cSt ASTM D7279(m)	6.3	6.1	6.1
Viscosity Index (VI)	Scale ASTM D2270*	148	144	144

SAMPLE IMAGES

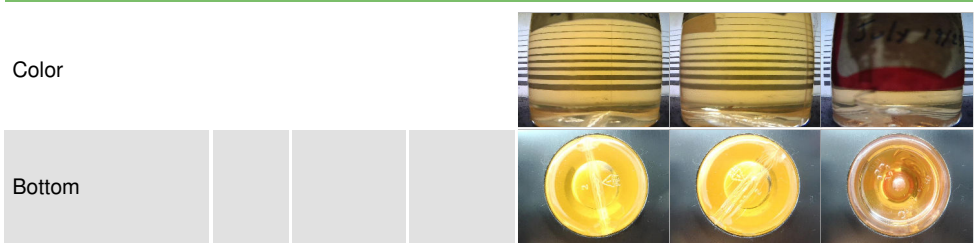

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC
Lab Number : 02584916
Unique Number : 5645981
Test Package : MAR 2 (Additional Tests: KV100, PQ, VI)

Received : 25 Sep 2023
Diagnosed : 26 Sep 2023
Diagnostician : Bill Quesnel

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Suncor - Terra Nova Projects
 Scotia Centre, 235 Water Strret
 St. John's, NL
 CA A1C 1B6
 Contact: Josh Hynes
 joshynes@suncor.com
 T: (709)778-3575
 F: (709)724-2835