




OIL ANALYSIS REPORT

Sample Rating Trend

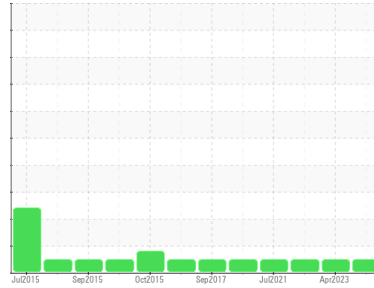

NORMAL



Machine Id
9947
Component
Front Diesel Engine
Fluid
PETRO CANADA DURON XL SYN BLEND 15W40 (43 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0091563	GFL0077569	GFL0052652
Sample Date	Client Info		05 Oct 2023	24 Apr 2023	10 May 2022
Machine Age	kms	Client Info	96991	22358	21477
Oil Age	kms	Client Info	0	311	227
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	17	11	4
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	0	0	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	<1	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	1	<1	1
Lead	ppm	ASTM D5185(m)	>40	21	1	1
Copper	ppm	ASTM D5185(m)	>330	8	<1	<1
Tin	ppm	ASTM D5185(m)	>15	2	0	<1
Antimony	ppm	ASTM D5185(m)		0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	1	3	4	3
Barium	ppm	ASTM D5185(m)	1	<1	0	0
Molybdenum	ppm	ASTM D5185(m)	60	56	55	57
Manganese	ppm	ASTM D5185(m)	1	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	888	892	982
Calcium	ppm	ASTM D5185(m)	1070	1021	1049	1009
Phosphorus	ppm	ASTM D5185(m)	1150	948	1015	1044
Zinc	ppm	ASTM D5185(m)	1270	1118	1104	1191
Sulfur	ppm	ASTM D5185(m)	2060	2450	2494	2616
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	6	3	4
Sodium	ppm	ASTM D5185(m)		12	1	1
Potassium	ppm	ASTM D5185(m)	>20	0	<1	1

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	1.5	1.1	0.5
Nitration	Abs/cm	ASTM D7624*	>20	6.5	7.0	5.9
Sulfation	Abs.1mm	ASTM D7415*	>30	21.2	20.1	20.7



OIL ANALYSIS REPORT







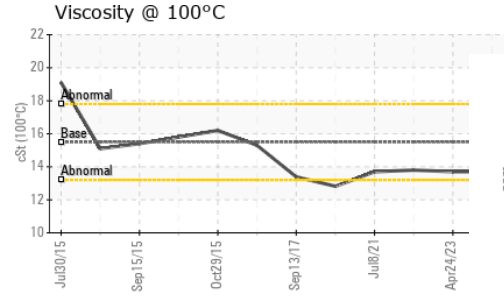
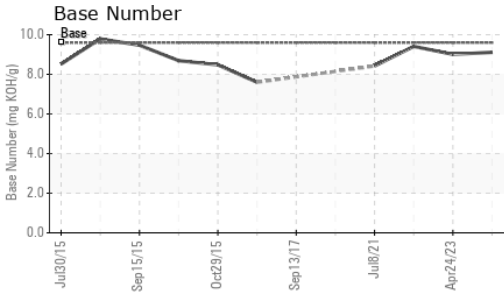


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	14.3	14.0	13.5
Base Number (BN)	mg KOH/g	ASTM D2896*	9.6	9.11	9.01	9.41

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.5	13.7	13.7	13.8

GRAPHS

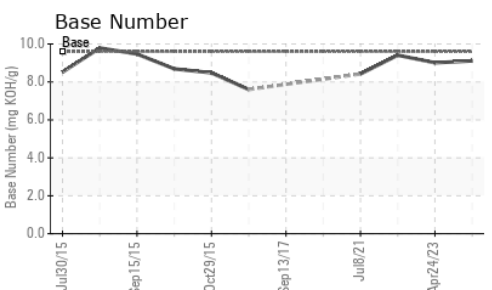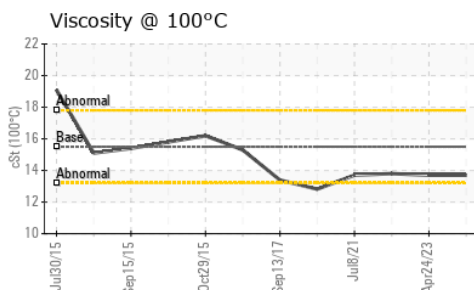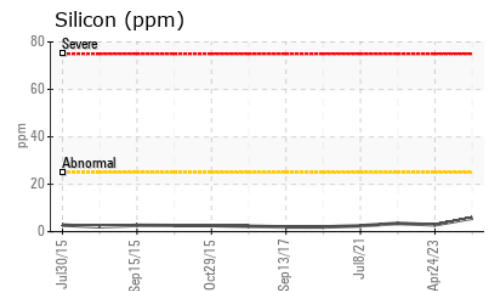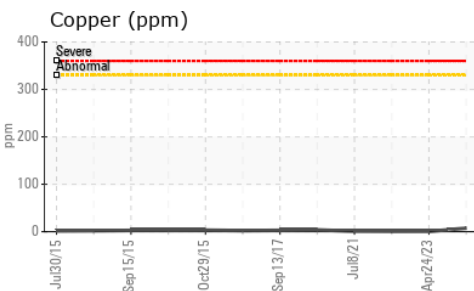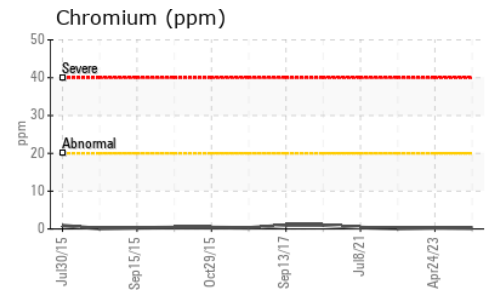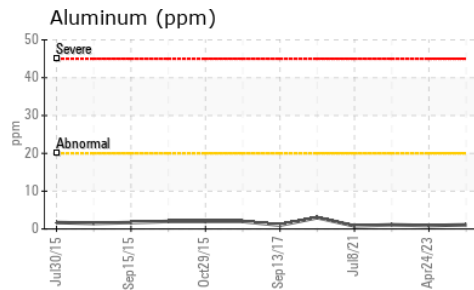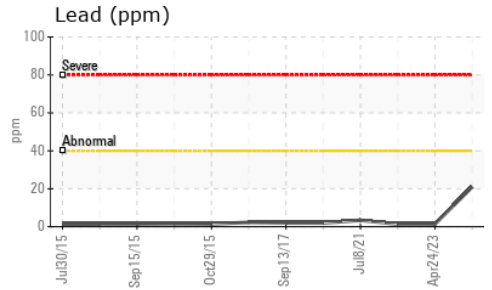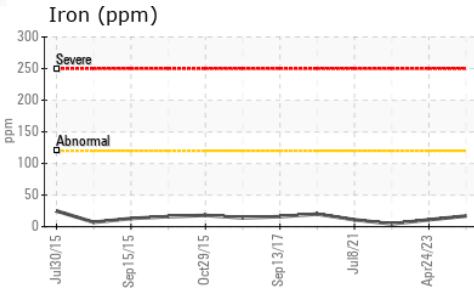

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 550 - Rocky View County
Sample No. : GFL0091563 **Received** : 11 Oct 2023 220 Carmek Blvd
Lab Number : **02588203** **Diagnosed** : 16 Oct 2023 Rocky View County, AB
Unique Number : 5657269 **Diagnostician** : Wes Davis CA T1X 1X1
Test Package : MOB 2 Contact: GFL Calgary calgarymaintenance@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
 F: (403)369-6163