


Area  
**SHARP BUS LINES**  
Machine Id  
**INTERNATIONAL 1371**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA 15W40 (--- GAL)**

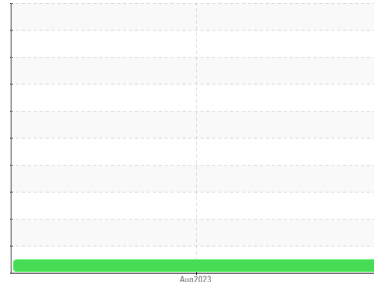

## DIAGNOSIS

**Recommendation**  
Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is no indication of any contamination in the oil.

**Fluid Condition**  
The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PC0081411</b>	---	---
Sample Date	Client Info		<b>09 Aug 2023</b>	---	---
Machine Age	kms	Client Info	<b>199639</b>	---	---
Oil Age	kms	Client Info	<b>1932</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	<b>28</b>	---	---
Chromium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m) >3	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m) >20	<b>5</b>	---	---
Lead	ppm	ASTM D5185(m) >40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m) >330	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m) >15	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>1</b>	---	---
Barium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	<b>57</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<b>902</b>	---	---
Calcium	ppm	ASTM D5185(m)	<b>968</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	<b>962</b>	---	---
Zinc	ppm	ASTM D5185(m)	<b>1117</b>	---	---
Sulfur	ppm	ASTM D5185(m)	<b>2455</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>6</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	---	---


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>1.4</b>	---	---
Nitration	Abs/cm	ASTM D7624* >20	<b>8.4</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>22.0</b>	---	---


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	<b>16.4</b>	---	---

# OIL ANALYSIS REPORT








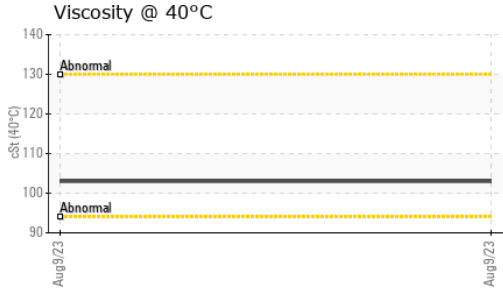


VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

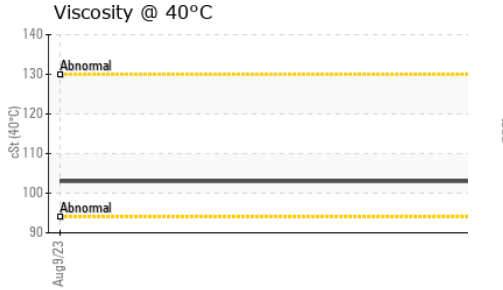

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		<b>103</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		<b>14.2</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		<b>140</b>	---	---

## GRAPHS

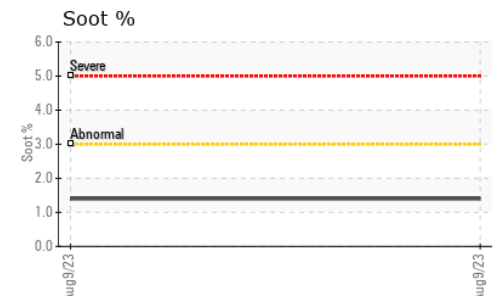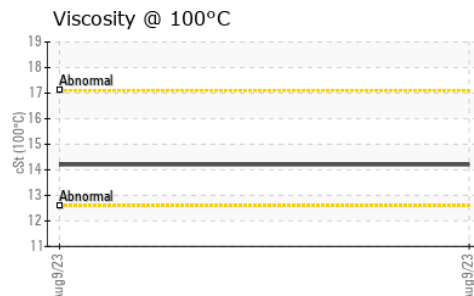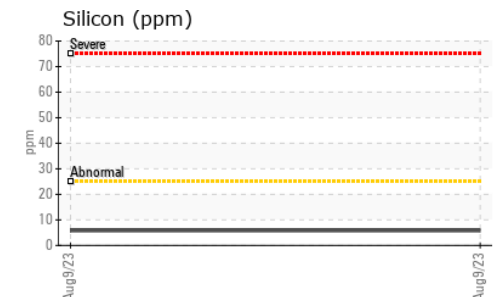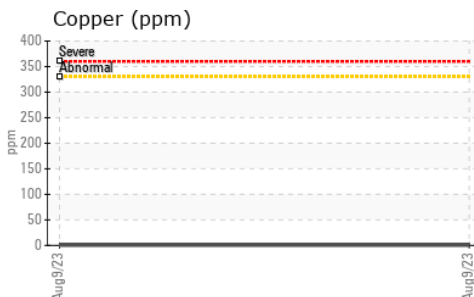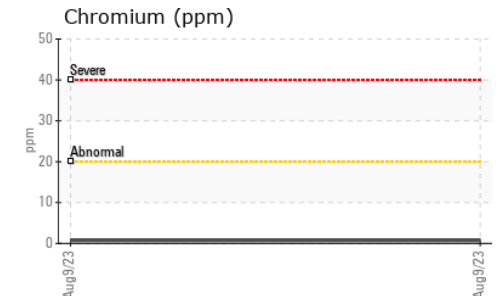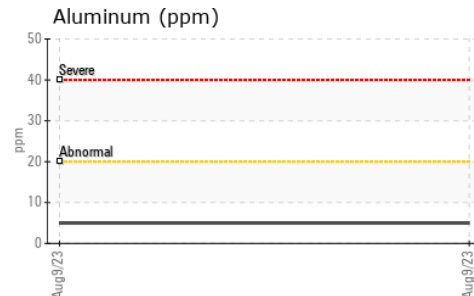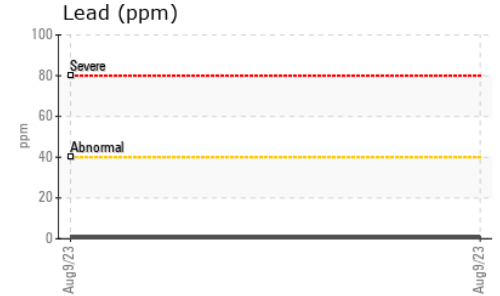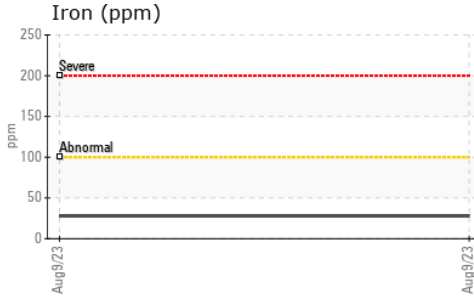

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0081411 **Received** : 18 Oct 2023  
**Lab Number** : 02589879 **Diagnosed** : 18 Oct 2023  
**Unique Number** : 5658945 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

**ICSB - Brantford**  
 567 Oak Park Rd.  
 Brantford, ON  
 CA N3T 5L8  
 Contact: Doug Hall  
 Djhall@sharpbus.com  
 T: (519)751-3434  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.