



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
801143

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0096754	---	---
Sample Date	Client Info	22 Nov 2023	---	---
Machine Age	kms Client Info	163651	---	---
Oil Age	kms Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		NORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >50	12	---	---
Chromium	ppm ASTM D5185(m) >4	<1	---	---
Nickel	ppm ASTM D5185(m) >2	<1	---	---
Titanium	ppm ASTM D5185(m)	0	---	---
Silver	ppm ASTM D5185(m) >3	<1	---	---
Aluminum	ppm ASTM D5185(m) >9	1	---	---
Lead	ppm ASTM D5185(m) >30	<1	---	---
Copper	ppm ASTM D5185(m) >35	1	---	---
Tin	ppm ASTM D5185(m) >4	<1	---	---
Antimony	ppm ASTM D5185(m)	0	---	---
Vanadium	ppm ASTM D5185(m)	0	---	---
Beryllium	ppm ASTM D5185(m)	0	---	---
Cadmium	ppm ASTM D5185(m)	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 50	7	---	---
Barium	ppm ASTM D5185(m) 5	<1	---	---
Molybdenum	ppm ASTM D5185(m) 50	48	---	---
Manganese	ppm ASTM D5185(m) 0	<1	---	---
Magnesium	ppm ASTM D5185(m) 560	481	---	---
Calcium	ppm ASTM D5185(m) 1510	1498	---	---
Phosphorus	ppm ASTM D5185(m) 780	590	---	---
Zinc	ppm ASTM D5185(m) 870	847	---	---
Sulfur	ppm ASTM D5185(m) 2040	1935	---	---
Lithium	ppm ASTM D5185(m)	<1	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >+100	5	---	---
Sodium	ppm ASTM D5185(m)	20	---	---
Potassium	ppm ASTM D5185(m) >20	18	---	---
Glycol	% ASTM D7922*	0.0	---	---

INFRA-RED


method	limit/base	current	history1	history2
Soot %	% ASTM D7844*	0	---	---
Nitration	Abs/cm ASTM D7624*	11.7	---	---
Sulfation	Abs/.1mm ASTM D7415*	23.2	---	---

FLUID DEGRADATION


method	limit/base	current	history1	history2
Oxidation	Abs/.1mm ASTM D7414*	19.2	---	---











OIL ANALYSIS REPORT

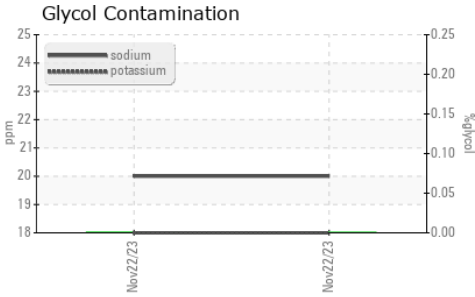

PARAMETER	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

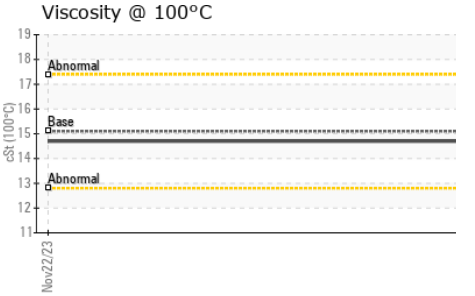

PARAMETER	method	limit/base	current	history1	history2
FLUID PROPERTIES					
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	14.7	---

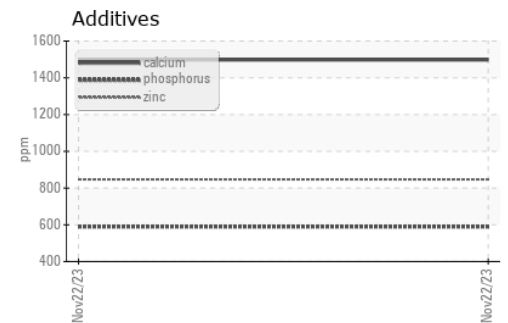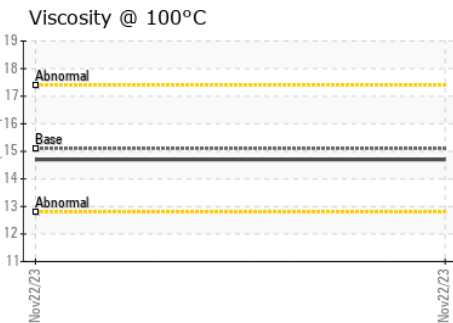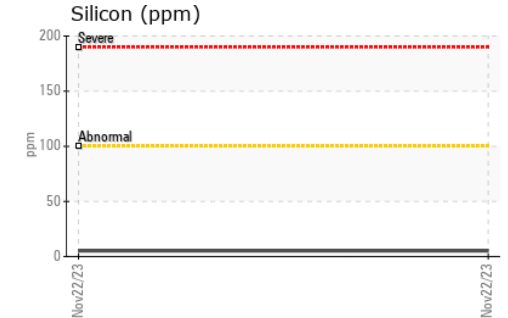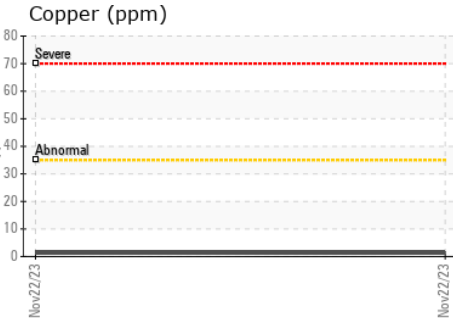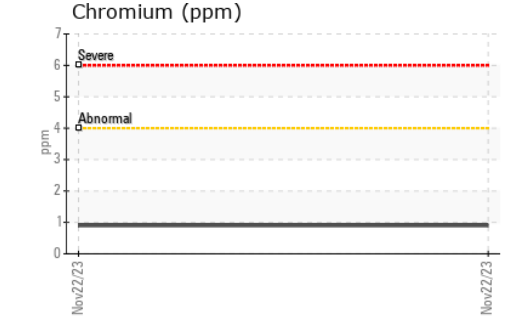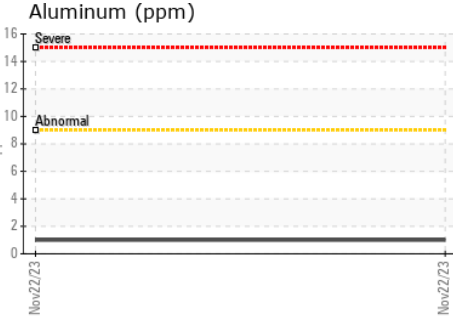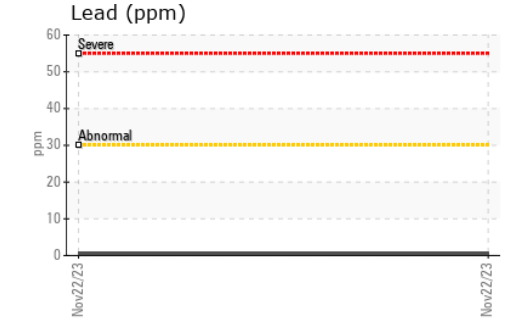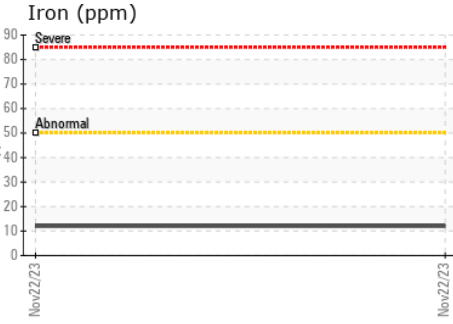

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 574 - Vancouver Fleet
Sample No. : GFL0096754 **Received** : 04 Dec 2023
Lab Number : 02600458 **Diagnosed** : 04 Dec 2023
Unique Number : 5685538 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

70 Golden Drive,
 Coquitlam, BC
 CA V3K 6B5
 Contact: Gary Ewasiuk
 gewasiuk@gflenv.com
 T:
 F: