


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

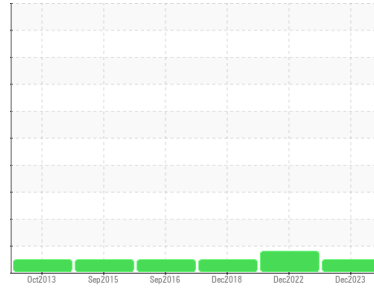

Machine Id
SPARTAN 25042 P314
Component
Front Diesel Engine
Fluid
CASTROL HYPURON 15W40 (27 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0083787	PC0067601	AP109950
Sample Date	Client Info			10 Dec 2023	01 Dec 2022	21 Dec 2018
Machine Age	kms	Client Info		0	180465	115009
Oil Age	kms	Client Info		0	0	11268
Oil Changed	Client Info			N/A	Changed	Changed
Sample Status				NORMAL	MARGINAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	▲ 2.6	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>75	20	52	46
Chromium	ppm	ASTM D5185(m)	>5	<1	1	1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	0
Titanium	ppm	ASTM D5185(m)	>2	0	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>15	2	2	3
Lead	ppm	ASTM D5185(m)	>25	2	7	3
Copper	ppm	ASTM D5185(m)	>100	2	11	6
Tin	ppm	ASTM D5185(m)	>4	0	<1	0
Antimony	ppm	ASTM D5185(m)		0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		2	23	29
Barium	ppm	ASTM D5185(m)		<1	0	0
Molybdenum	ppm	ASTM D5185(m)		61	55	43
Manganese	ppm	ASTM D5185(m)		0	1	<1
Magnesium	ppm	ASTM D5185(m)		963	941	688
Calcium	ppm	ASTM D5185(m)		1032	942	1534
Phosphorus	ppm	ASTM D5185(m)		932	971	1040
Zinc	ppm	ASTM D5185(m)		1145	1098	1287
Sulfur	ppm	ASTM D5185(m)		2450	2483	2909
Lithium	ppm	ASTM D5185(m)		<1	<1	0

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	5	20	13
Sodium	ppm	ASTM D5185(m)		3	15	8
Potassium	ppm	ASTM D5185(m)	>20	2	4	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	0.6	0.9	1.5
Nitration	Abs/cm	ASTM D7624*	>20	11.1	12.9	15.6
Sulfation	Abs./1mm	ASTM D7415*	>30	26.4	31.4	33.1

OIL ANALYSIS REPORT







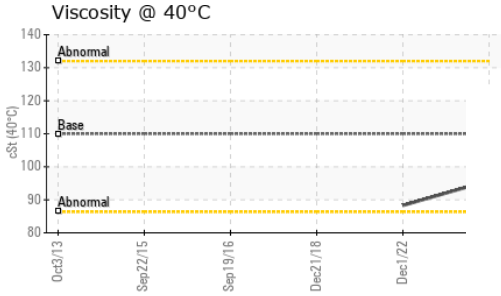
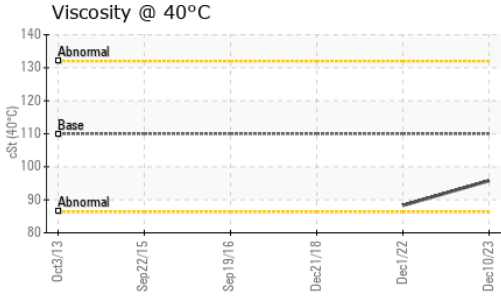


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	27.7	32.1	32.6

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	110	95.8	88.3	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	13.3	12.7	16.1
Viscosity Index (VI)	Scale	ASTM D2270*	140	138	141	---

GRAPHS

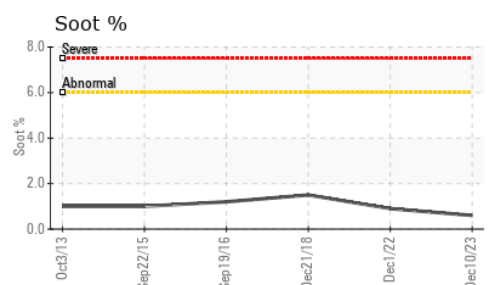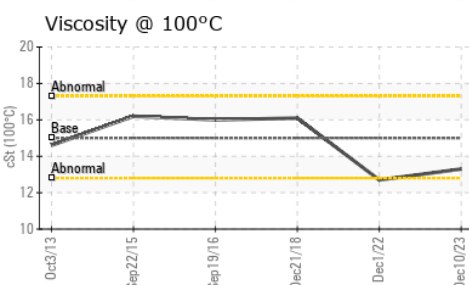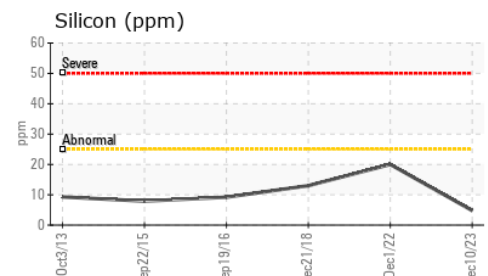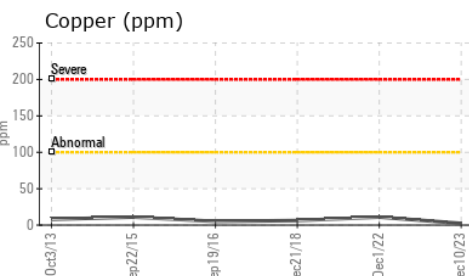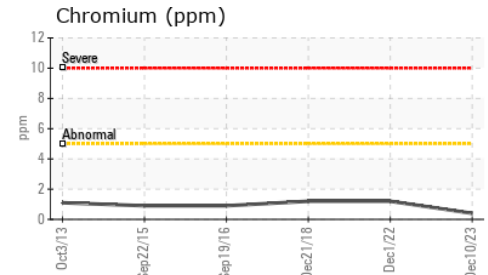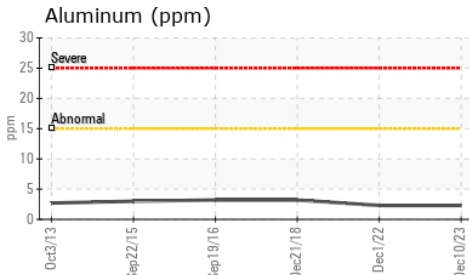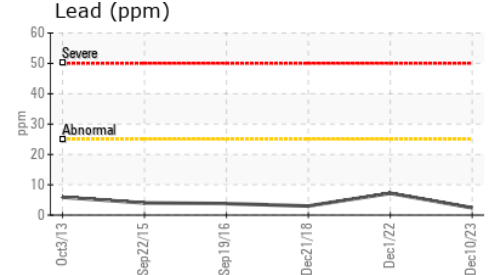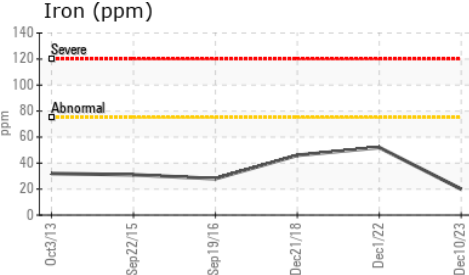

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0083787 **Received** : 15 Dec 2023
Lab Number : **02603426** **Diagnosed** : 18 Dec 2023
Unique Number : 5696511 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: KV40, VI)

TORONTO FIRE SERVICES
 40 TORYORK DRIVE
 TORONTO, ON
 CA M9L 1X6
 Contact: Antonio Rodrigues
 antonio.rodrigues@toronto.ca
 T:
 F: (416)338-9207

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.