




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

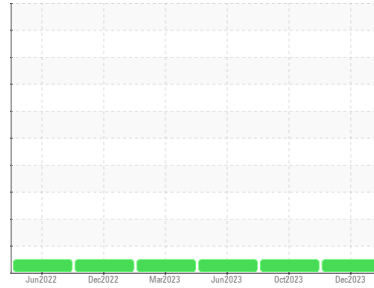

Machine Id
423048

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0099514	GFL0068057	GFL0068044
Sample Date	Client Info		13 Dec 2023	12 Oct 2023	09 Jun 2023
Machine Age	hrs	Client Info	20136	19877	19285
Oil Age	hrs	Client Info	259	592	400
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >110	15	31	21
Chromium	ppm	ASTM D5185(m) >4	<1	<1	<1
Nickel	ppm	ASTM D5185(m) >2	<1	0	0
Titanium	ppm	ASTM D5185(m)	0	0	<1
Silver	ppm	ASTM D5185(m) >2	0	<1	0
Aluminum	ppm	ASTM D5185(m) >25	5	7	6
Lead	ppm	ASTM D5185(m) >45	<1	<1	0
Copper	ppm	ASTM D5185(m) >85	1	2	1
Tin	ppm	ASTM D5185(m) >4	0	0	<1
Antimony	ppm	ASTM D5185(m)	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	4	3	4
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	59	62	59
Manganese	ppm	ASTM D5185(m) 0	0	0	<1
Magnesium	ppm	ASTM D5185(m) 1010	976	990	969
Calcium	ppm	ASTM D5185(m) 1070	1041	1062	1118
Phosphorus	ppm	ASTM D5185(m) 1150	1019	1014	1095
Zinc	ppm	ASTM D5185(m) 1270	1182	1204	1239
Sulfur	ppm	ASTM D5185(m) 2060	2725	2479	2694
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >30	5	6	5
Sodium	ppm	ASTM D5185(m)	2	2	1
Potassium	ppm	ASTM D5185(m) >20	2	<1	<1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	0.1	0.3	0.1
Nitration	Abs/cm	ASTM D7624* >20	8.4	11.4	8.0
Sulfation	Abs/.1mm	ASTM D7415* >30	19.3	23.0	19.1



OIL ANALYSIS REPORT








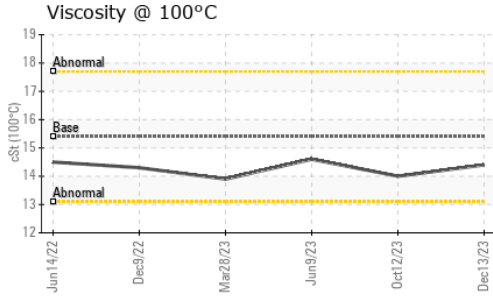


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	16.6	21.6	15.9

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.4	14.0	14.6

GRAPHS

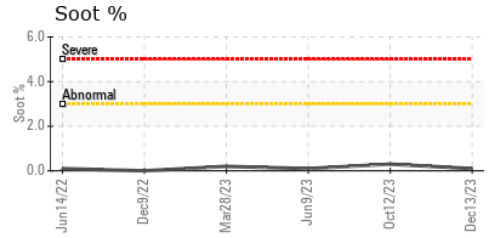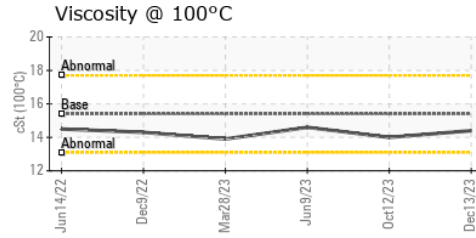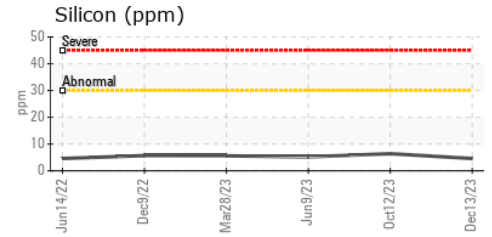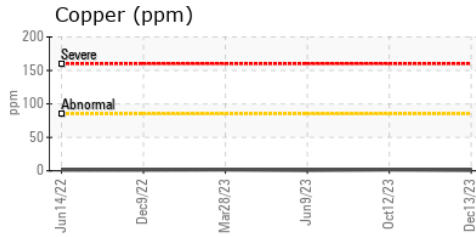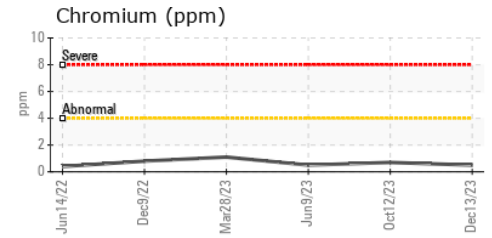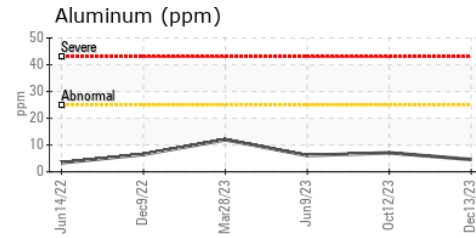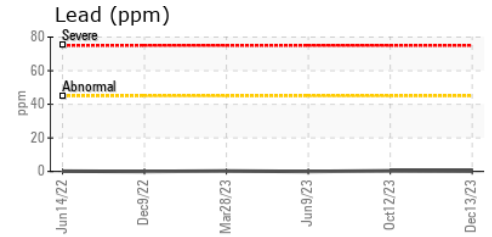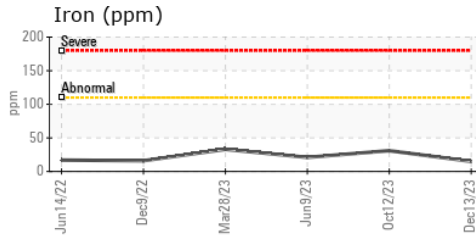

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0099514 **Received** : 02 Jan 2024
Lab Number : **02605725** **Diagnosed** : 02 Jan 2024
Unique Number : 5698810 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

GFL Environmental - 522
 175 MacAlpine Crescent
 Fort McMurray, AB
 CA T9H 4A5
 Contact: Brad Poole
 bradley.poole@gflenv.com
 T:
 F: