


GREASE ANALYSIS

Sample Rating Trend



NORMAL

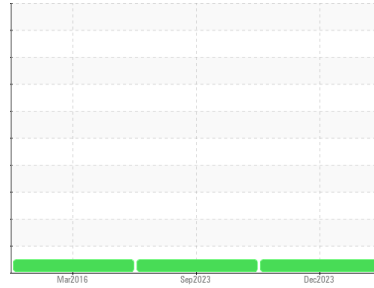

Area
[450240064]
Machine Id
NC-05603 TORQUE TUBE BEARING
Component
3 Grease
Fluid
PETRO CANADA GREASE OG-1 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Grease Condition

The condition of the grease is acceptable for the time in service.

Contaminants

There is no indication of any contamination in the grease.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC	PC	PC
Sample Date	Client Info	20 Dec 2023	18 Sep 2023	07 Mar 2016
Machine Age	hrs Client Info	0	0	0
Grease Age	hrs Client Info	0	0	0
Grease Serviced	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184* >200	0	0	---
Iron	ppm ASTM D5185(m) >250	3	15	<1
Chromium	ppm ASTM D5185(m) >10	0	0	0
Nickel	ppm ASTM D5185(m) >5	<1	<1	0
Cadmium	ppm ASTM D5185(m)	0	0	0
Titanium	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Lead	ppm ASTM D5185(m) >25	0	0	0
Copper	ppm ASTM D5185(m) >75	<1	<1	0
Tin	ppm ASTM D5185(m) >5	0	0	0
Silver	ppm ASTM D5185(m) >5	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	141	181	2
Magnesium	ppm ASTM D5185(m)	7	14	<1
Manganese	ppm ASTM D5185(m)	0	<1	0
Molybdenum	ppm ASTM D5185(m)	0	0	<1
Phosphorus	ppm ASTM D5185(m)	<1	4	9
Zinc	ppm ASTM D5185(m)	57	19	4
Antimony	ppm ASTM D5185(m)	0	0	<1

THICKENER/SOAP

method	limit/base	current	history1	history2
Aluminum	ppm ASTM D5185(m)	2	2	0
Barium	ppm ASTM D5185(m)	0	<1	0
Calcium	ppm ASTM D5185(m)	3701	4547	12
Sodium	ppm ASTM D5185(m)	10	6	<1
Lithium	ppm ASTM D5185(m)	<1	<1	34
Sulfur	ppm ASTM D5185(m)	681	834	500


CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >150	3	4	<1
Potassium	ppm ASTM D5185(m)	3	1	1

GREASE CONDITION






method	limit/base	current	history1	history2
Grease Color	Visual* Tan	Cream	Cream	---
Texture	In-house* Buttery	Buttery	Buttery	---
NLGI Consistency	NLGI Scale SKF Method* 1	2	1	---

GREASE ANALYSIS

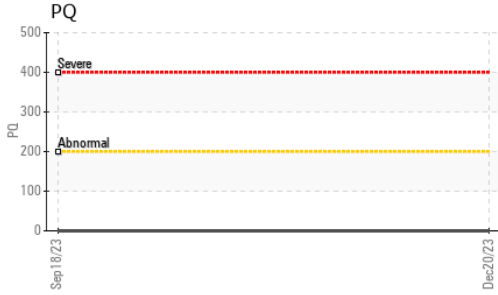

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					
PrtFilter					no image

GRAPHS

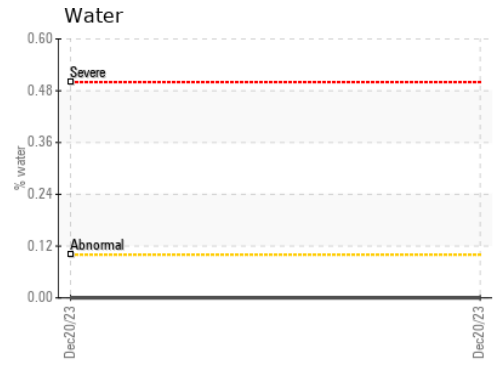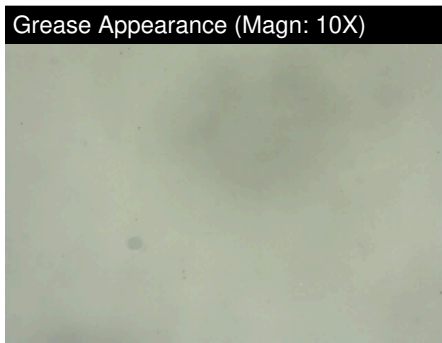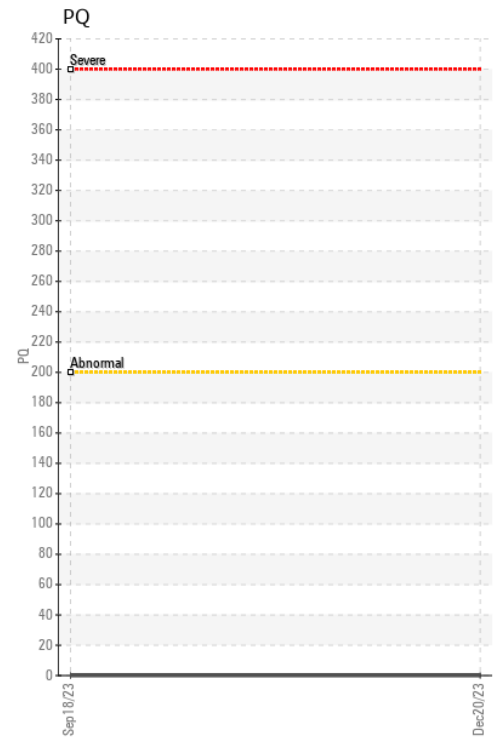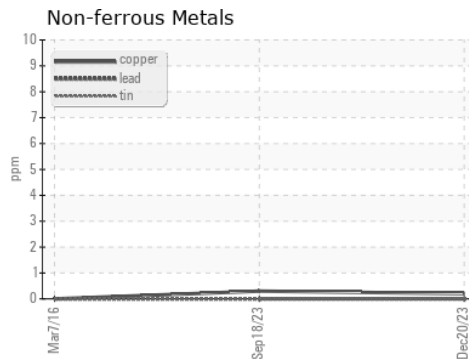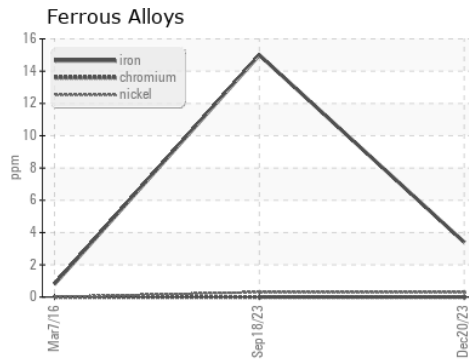

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC **Received** : 17 Jan 2024
Lab Number : 02609583 **Diagnosed** : 19 Jan 2024
Unique Number : 5710669 **Diagnostician** : Bill Quesnel
Test Package : GRS 1 (Additional Tests: BottomAnalysis, KV40, Spat, TAN Auto)

Suncor - Terra Nova Projects
 Scotia Centre, 235 Water Street
 St. John's, NL
 CA A1C 1B6
 Contact: Josh Hynes
 joshynes@suncor.com
 T: (709)778-3575
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.