



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
833070
Component
Natural Gas Engine
Fluid
{not provided} (24 LTR)



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Metal levels are typical for a components first oil change.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0094403	---	---
Sample Date	Client Info		24 Jan 2024	---	---
Machine Age	hrs	Client Info	1263	---	---
Oil Age	hrs	Client Info	1263	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m) >50	58	---	---
Chromium	ppm	ASTM D5185(m) >4	1	---	---
Nickel	ppm	ASTM D5185(m) >2	2	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m) >3	<1	---	---
Aluminum	ppm	ASTM D5185(m) >9	6	---	---
Lead	ppm	ASTM D5185(m) >30	2	---	---
Copper	ppm	ASTM D5185(m) >35	18	---	---
Tin	ppm	ASTM D5185(m) >4	2	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	6	---	---
Barium	ppm	ASTM D5185(m)	3	---	---
Molybdenum	ppm	ASTM D5185(m)	99	---	---
Manganese	ppm	ASTM D5185(m)	14	---	---
Magnesium	ppm	ASTM D5185(m)	698	---	---
Calcium	ppm	ASTM D5185(m)	1426	---	---
Phosphorus	ppm	ASTM D5185(m)	734	---	---
Zinc	ppm	ASTM D5185(m)	858	---	---
Sulfur	ppm	ASTM D5185(m)	2239	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >+100	30	---	---
Sodium	ppm	ASTM D5185(m)	5	---	---
Potassium	ppm	ASTM D5185(m) >20	2	---	---

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0	---	---
Nitration	Abs/cm	ASTM D7624* >20	11.7	---	---
Sulfation	Abs/.1mm	ASTM D7415* >30	25.2	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	21.6	---	---










OIL ANALYSIS REPORT

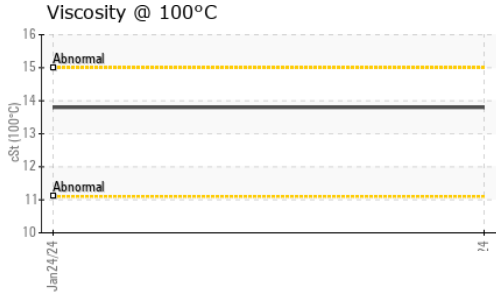

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	13.8	---	---

GRAPHS

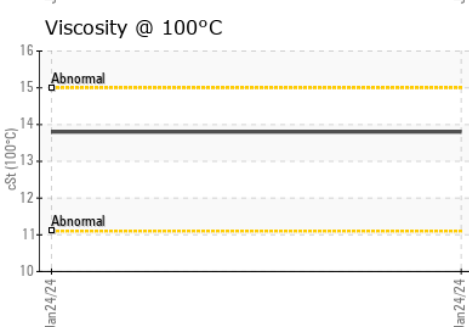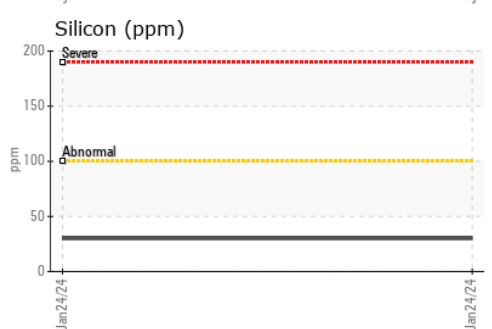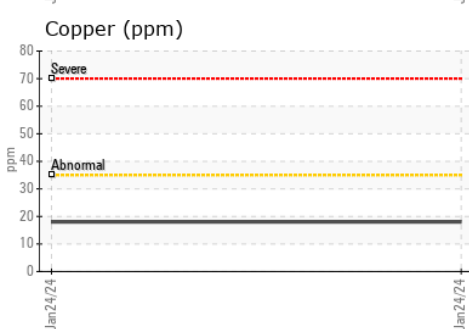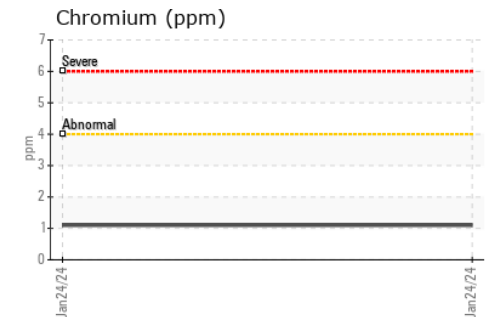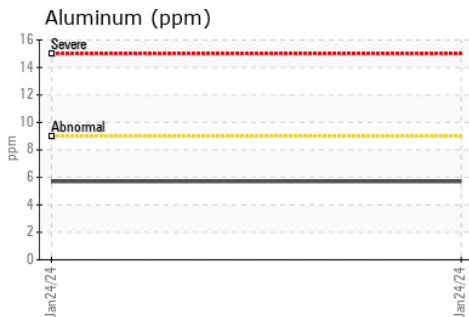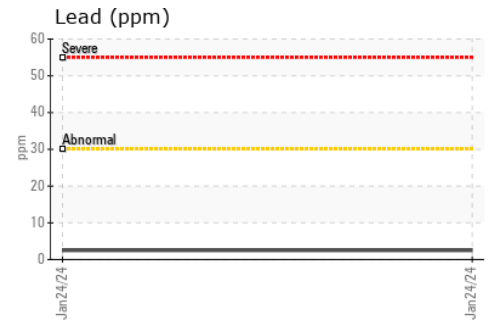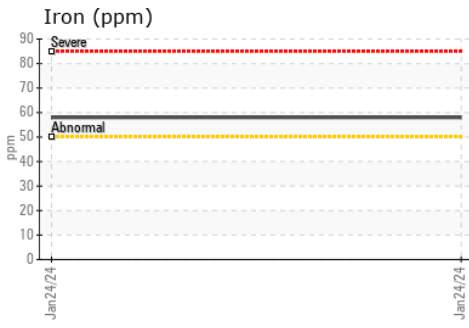

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0094403 **Received** : 25 Jan 2024
Lab Number : 02611091 **Diagnosed** : 26 Jan 2024
Unique Number : 5720186 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: PQ)
 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

GFL Environmental - 222 - Sandhill
 SANDHILL DISPOSAL & RECYCLING DIVIS, 19 COMMERCE ROAD
 ORANGEVILLE, ON
 CA L9W 3X5
 Contact: GLENN COOK
 gcook@gflenv.com
 T: (519)940-4167
 F: