



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
NO UNIT GFL02611361

Component
Diesel Engine
Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL	---	---
Sample Date	Client Info	25 Jan 2024	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		NORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	30	---	---
Chromium	ppm ASTM D5185(m) >20	1	---	---
Nickel	ppm ASTM D5185(m) >4	<1	---	---
Titanium	ppm ASTM D5185(m)	0	---	---
Silver	ppm ASTM D5185(m) >3	0	---	---
Aluminum	ppm ASTM D5185(m) >20	3	---	---
Lead	ppm ASTM D5185(m) >40	<1	---	---
Copper	ppm ASTM D5185(m) >330	<1	---	---
Tin	ppm ASTM D5185(m) >15	<1	---	---
Antimony	ppm ASTM D5185(m)	0	---	---
Vanadium	ppm ASTM D5185(m)	0	---	---
Beryllium	ppm ASTM D5185(m)	0	---	---
Cadmium	ppm ASTM D5185(m)	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	2	---	---
Barium	ppm ASTM D5185(m)	0	---	---
Molybdenum	ppm ASTM D5185(m)	60	---	---
Manganese	ppm ASTM D5185(m)	0	---	---
Magnesium	ppm ASTM D5185(m)	972	---	---
Calcium	ppm ASTM D5185(m)	1088	---	---
Phosphorus	ppm ASTM D5185(m)	1012	---	---
Zinc	ppm ASTM D5185(m)	1200	---	---
Sulfur	ppm ASTM D5185(m)	2632	---	---
Lithium	ppm ASTM D5185(m)	<1	---	---

CONTAMINANTS



method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	4	---	---
Sodium	ppm ASTM D5185(m)	5	---	---
Potassium	ppm ASTM D5185(m) >20	2	---	---
Fuel	% ASTM D7593* >5	1.6	---	---

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	0.8	---	---
Nitration	Abs/cm ASTM D7624* >20	9.1	---	---
Sulfation	Abs./1mm ASTM D7415* >30	20.9	---	---



OIL ANALYSIS REPORT







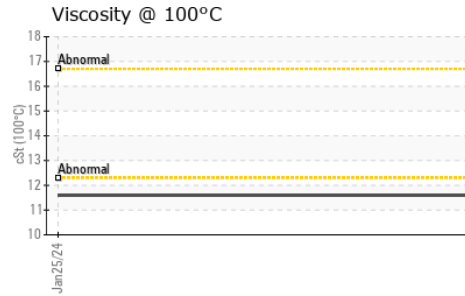
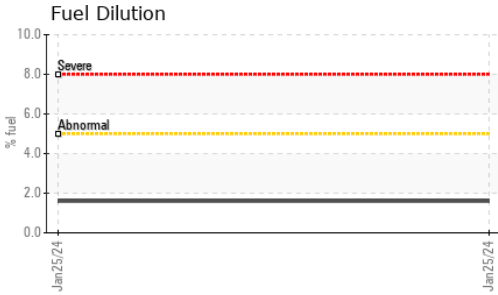


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	17.2	---	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)		11.6	---	---

GRAPHS

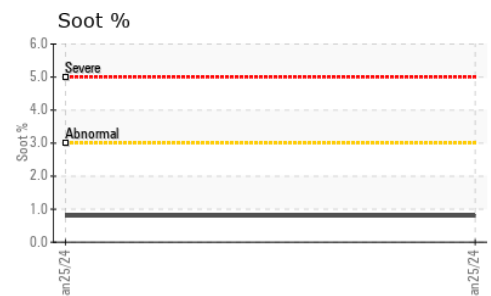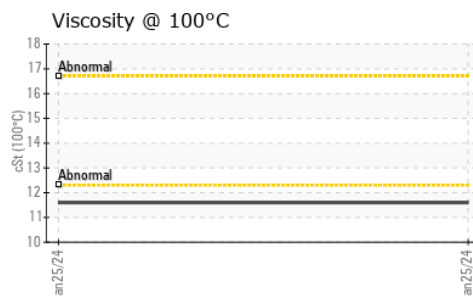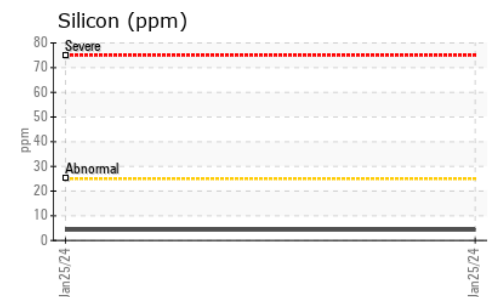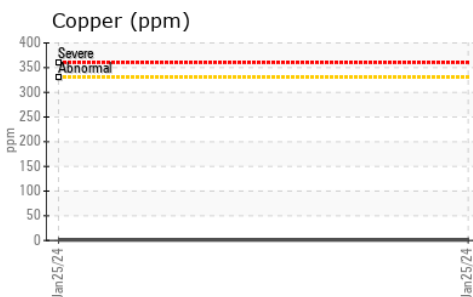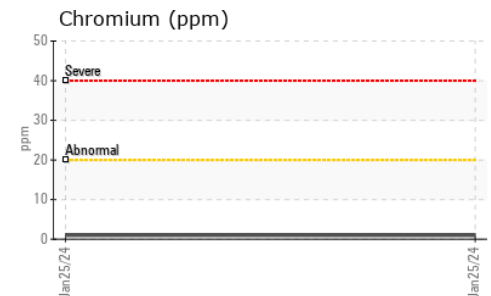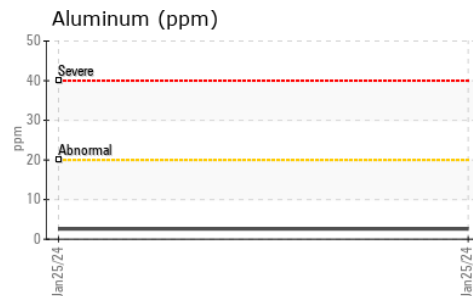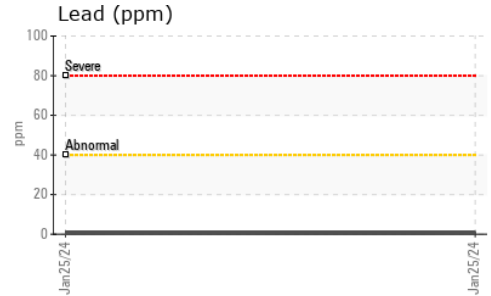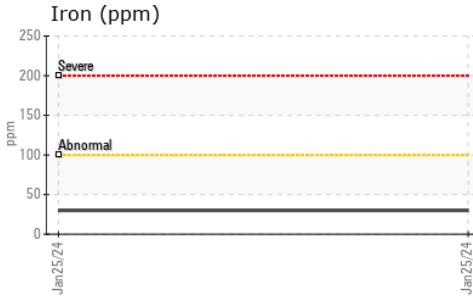

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 554 - Edmonton SW**
Sample No. : GFL **Received** : 26 Jan 2024 **8409 -15th Street NW**
Lab Number : **02611361** **Diagnosed** : 29 Jan 2024 **Edmonton, AB**
Unique Number : 5720456 **Diagnostician** : Bill Quesnel **CA T6P 0B8**
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel) **Contact: Kenny Hawkins**
khawkins2@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (780)444-8805
F: