




Machine Id
IMM #14 (S/N 2131042)


Component
Hydraulic System

Fluid
PETRO CANADA HYDREX AW 46 (2000 LTR)

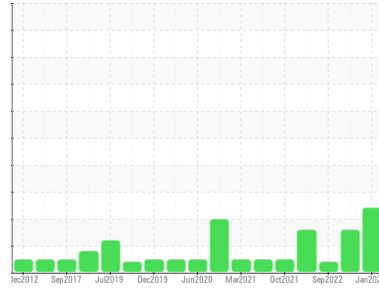


COMPONENT CONDITION SUMMARY

Varnish Potential

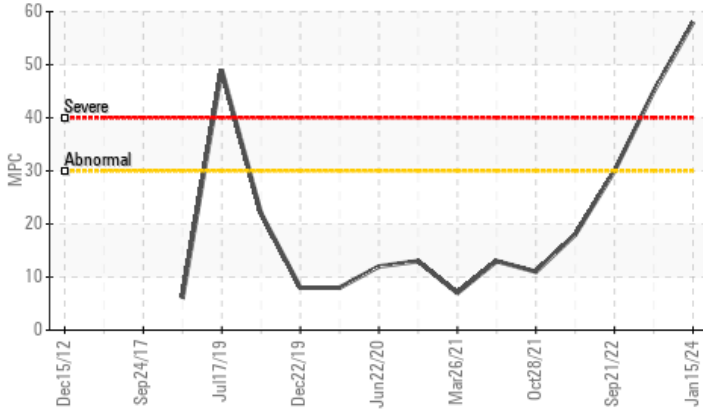

Particle Trend

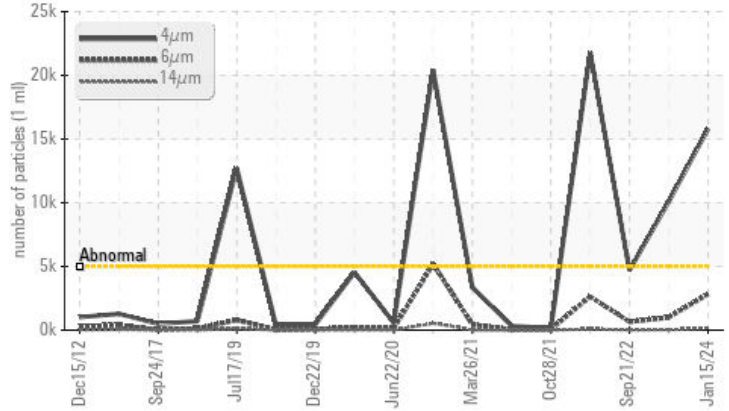

RECOMMENDATION

We recommend you service the filters on this component. We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	SEVERE	ABNORMAL
Particles >4µm	ASTM D7647	>5000	▲ 15799	▲ 10085	4701
Particles >6µm	ASTM D7647	>1300	▲ 2810	997	654
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/19/15	▲ 21/17/12	19/17/12
MPC Varnish Potential	Scale	ASTM D7843(m)* >15	● 58	● 45	▲ 30

Customer Id: ROPOAK
Sample No.: PC0080835
Lab Number: 02611521
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Bill Quesnel CLS,OMA II,MLA-III,LLA-I +1
(289)291-4641 x4641
Bill.Quesnel@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Filter Fluid	---	---	?	We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level.

HISTORICAL DIAGNOSIS

INSOLUBLES



11 Jul 2023 Diag: Kevin Marson

We recommend you service the filters on this component. We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid. Component wear rates appear to be normal (unconfirmed). There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. MPC (Membrane Patch Colorimetry) test indicates a high concentration of varnish present. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



INSOLUBLES



21 Sep 2022 Diag: Kevin Marson

We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates a moderate concentration of varnish present. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The AN level is acceptable for this fluid.

view report



INSOLUBLES



10 May 2022 Diag: Kevin Marson

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. No other corrective action is recommended at this time. All component wear rates are normal. Oil Cleanliness are abnormally high. Particles >4µm are abnormally high. Particles >6µm are abnormally high. MPC Varnish Potential contamination levels are marginally high. MPC (Membrane Patch Colorimetry) test indicates a light concentration of varnish present. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report






Machine Id
IMM #14 (S/N 2131042)

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX AW 46 (2000 LTR)

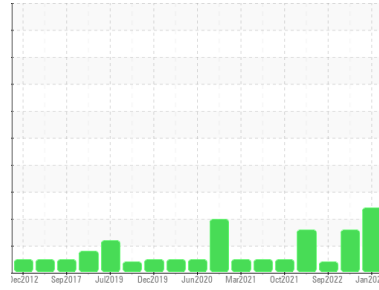

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. MPC (Membrane Patch Colorimetry) test indicates a high concentration of varnish present.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0080835	PC0076916	PC0062444
Sample Date	Client Info		15 Jan 2024	11 Jul 2023	21 Sep 2022
Machine Age	days	Client Info	0	0	0
Oil Age	days	Client Info	0	0	4
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			SEVERE	SEVERE	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	1	1	1
Chromium	ppm	ASTM D5185(m) >20	1	<1	<1
Nickel	ppm	ASTM D5185(m) >20	<1	<1	0
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m)	0	0	0
Aluminum	ppm	ASTM D5185(m) >20	<1	0	0
Lead	ppm	ASTM D5185(m) >20	0	<1	<1
Copper	ppm	ASTM D5185(m) >20	2	2	2
Tin	ppm	ASTM D5185(m) >20	0	0	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	0	<1	<1
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 0	0	0	0
Manganese	ppm	ASTM D5185(m) 0	0	0	0
Magnesium	ppm	ASTM D5185(m) 0	<1	<1	0
Calcium	ppm	ASTM D5185(m) 50	14	18	32
Phosphorus	ppm	ASTM D5185(m) 330	337	347	353
Zinc	ppm	ASTM D5185(m) 430	263	315	356
Sulfur	ppm	ASTM D5185(m) 760	744	700	772
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<1	<1	<1
Sodium	ppm	ASTM D5185(m)	0	0	0
Potassium	ppm	ASTM D5185(m) >20	<1	<1	<1

FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 15799	▲ 10085	4701
Particles >6µm	ASTM D7647	>1300	▲ 2810	997	654
Particles >14µm	ASTM D7647	>160	▲ 169	25	21
Particles >21µm	ASTM D7647	>40	31	5	4
Particles >38µm	ASTM D7647	>10	2	0	0
Particles >71µm	ASTM D7647	>3	1	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/19/15	▲ 21/17/12	19/17/12

OIL ANALYSIS REPORT


Varnish Potential

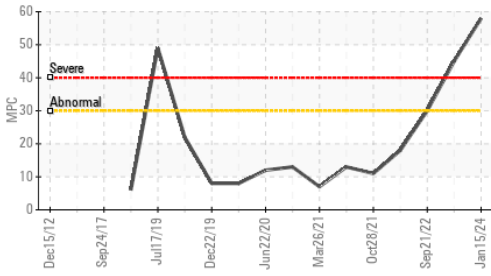


Particle Count

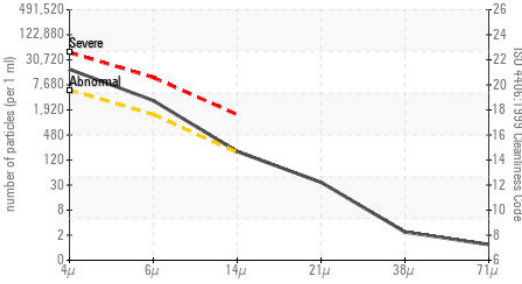


Particle Trend

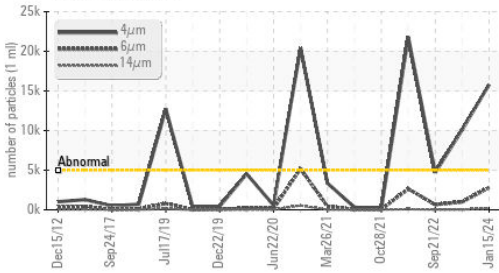

Acid Number

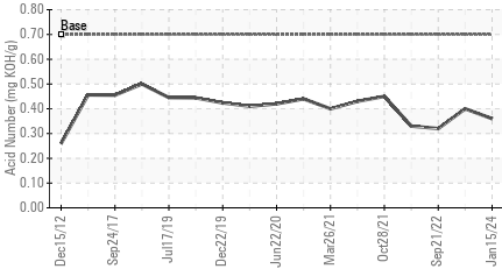

Viscosity @ 100°C

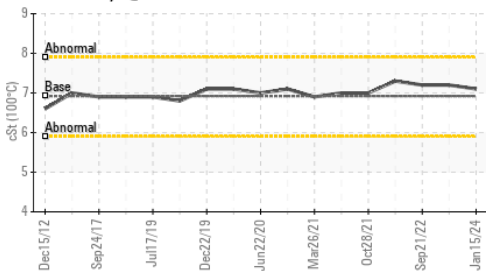


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.70	0.36	0.40	0.32
MPC Varnish Potential	Scale	ASTM D7843(m)*	>15	58	45	30

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.4	44.7	45.0	45.3
Visc @ 100°C	cSt	ASTM D7279(m)	6.92	7.1	7.2	7.2
Viscosity Index (VI)	Scale	ASTM D2270*	104	118	120	119

SAMPLE IMAGES

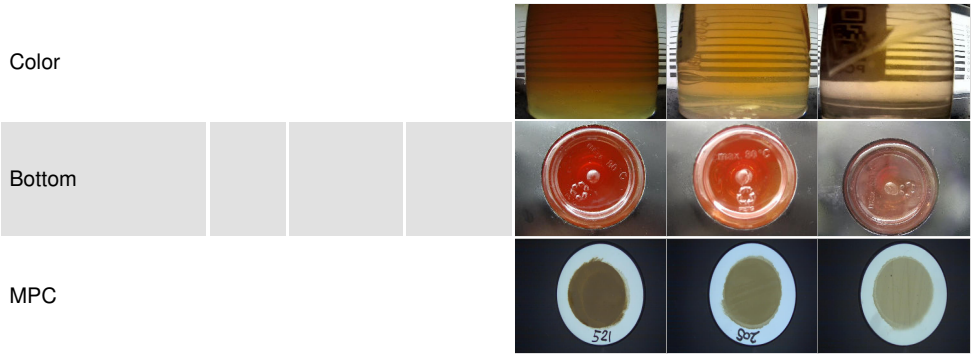

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0080835 **Received** : 26 Jan 2024
Lab Number : **02611521** **Diagnosed** : 29 Jan 2024
Unique Number : 5720616 **Diagnostician** : Bill Quesnel
Test Package : IND 2 (Additional Tests: KV100, MPC, VI)

ROPAK PACKAGING CANADA
 2240 WYECROFT RD
 OAKVILLE, ON
 CA L6L 6M1
 Contact: Frank Maio
 Frank.Maio@mauserpackaging.com
 T: (905)465-9019
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

MPC (Varnish Test)



Sample Color & Clarity



This page left intentionally blank